

FIG. 1

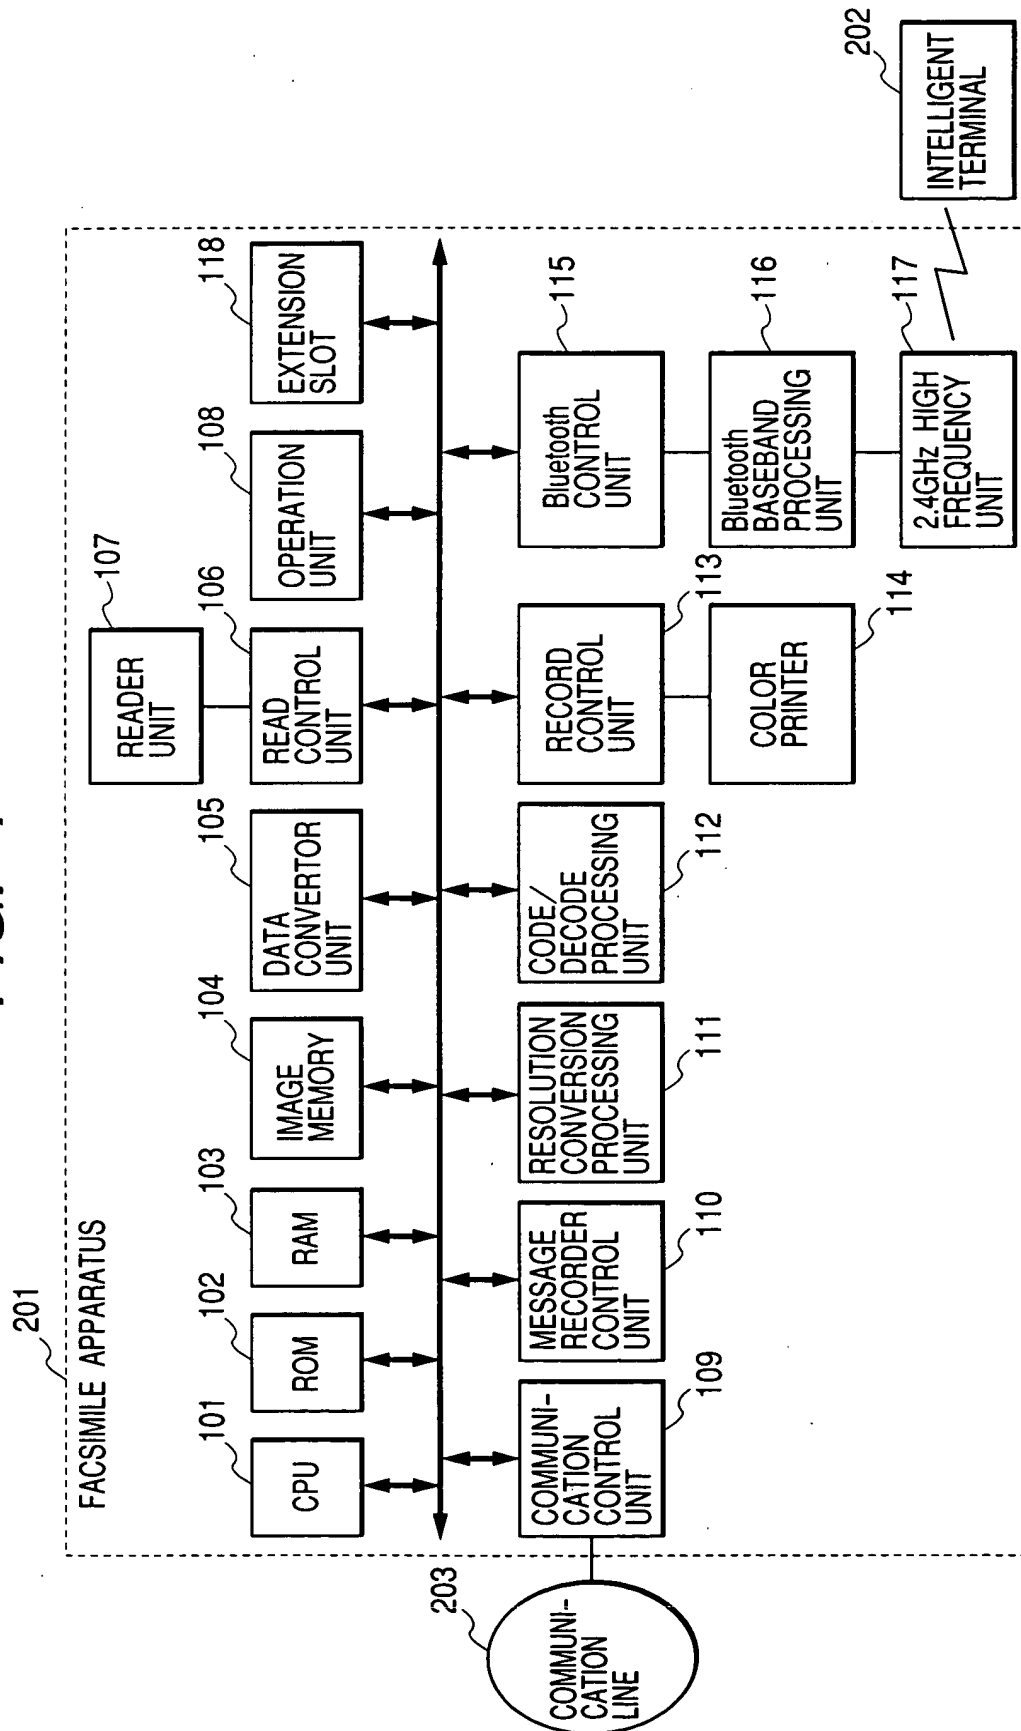


FIG. 2

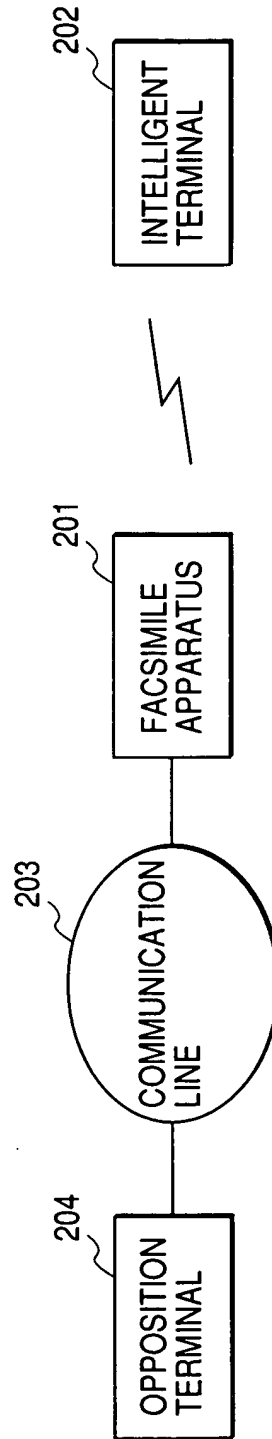


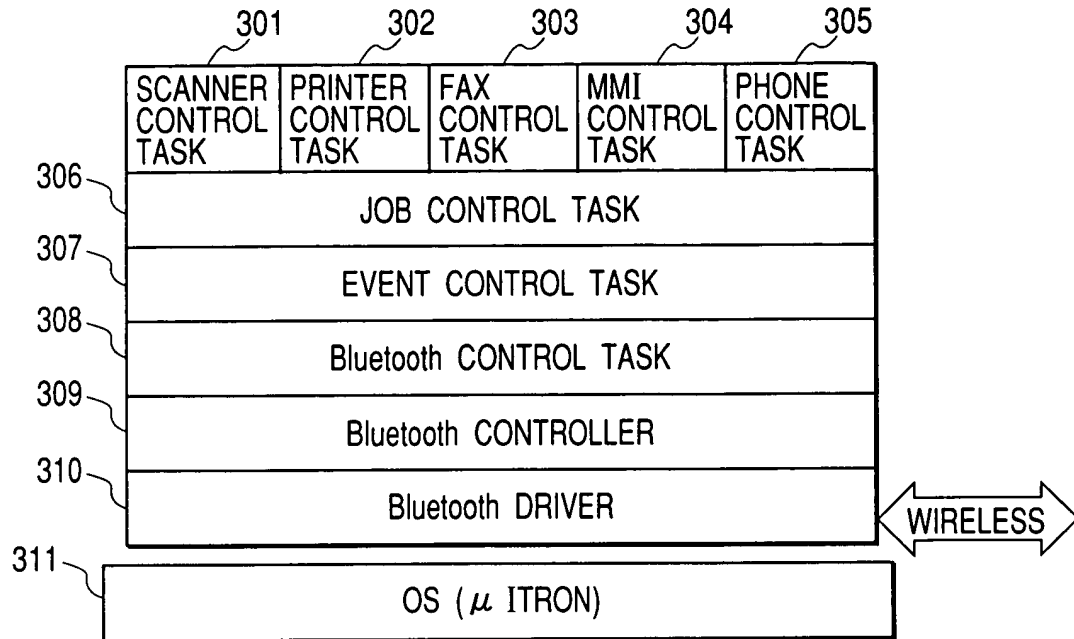
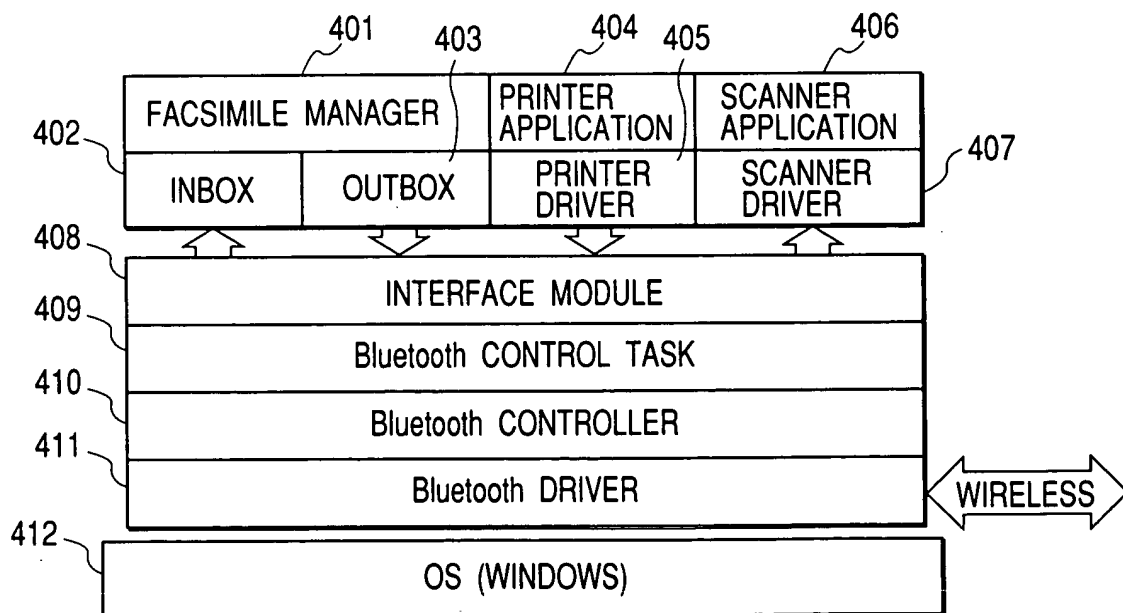
FIG. 3**FIG. 4**

FIG. 5

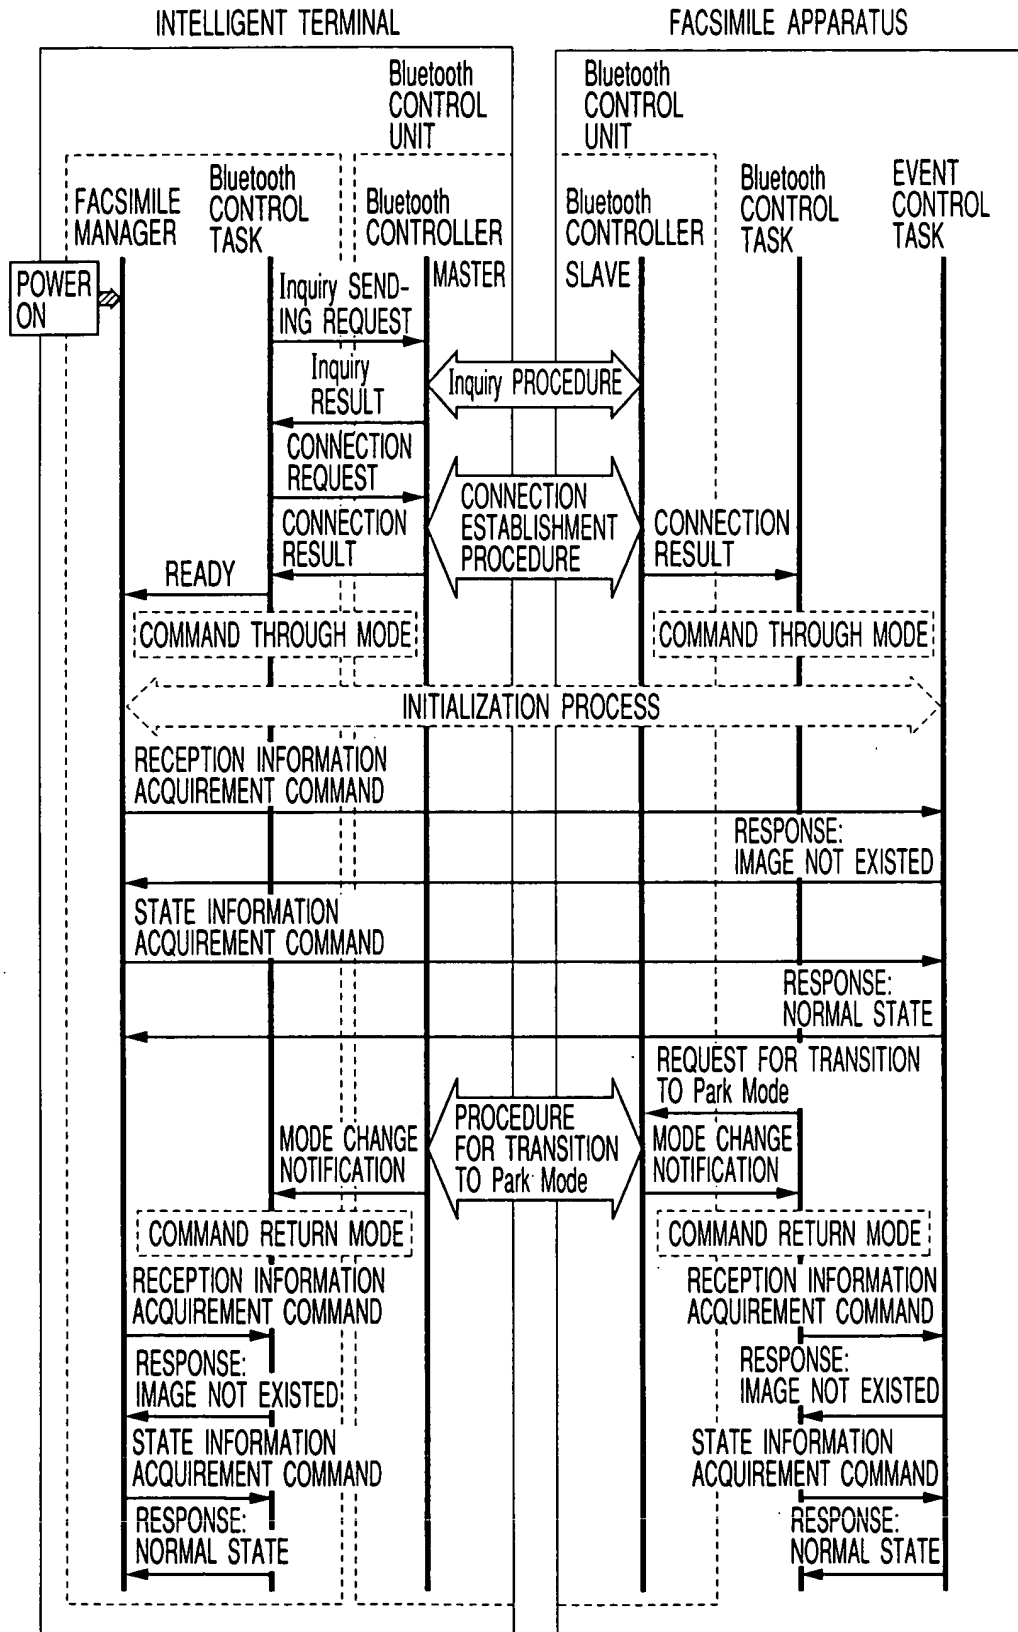


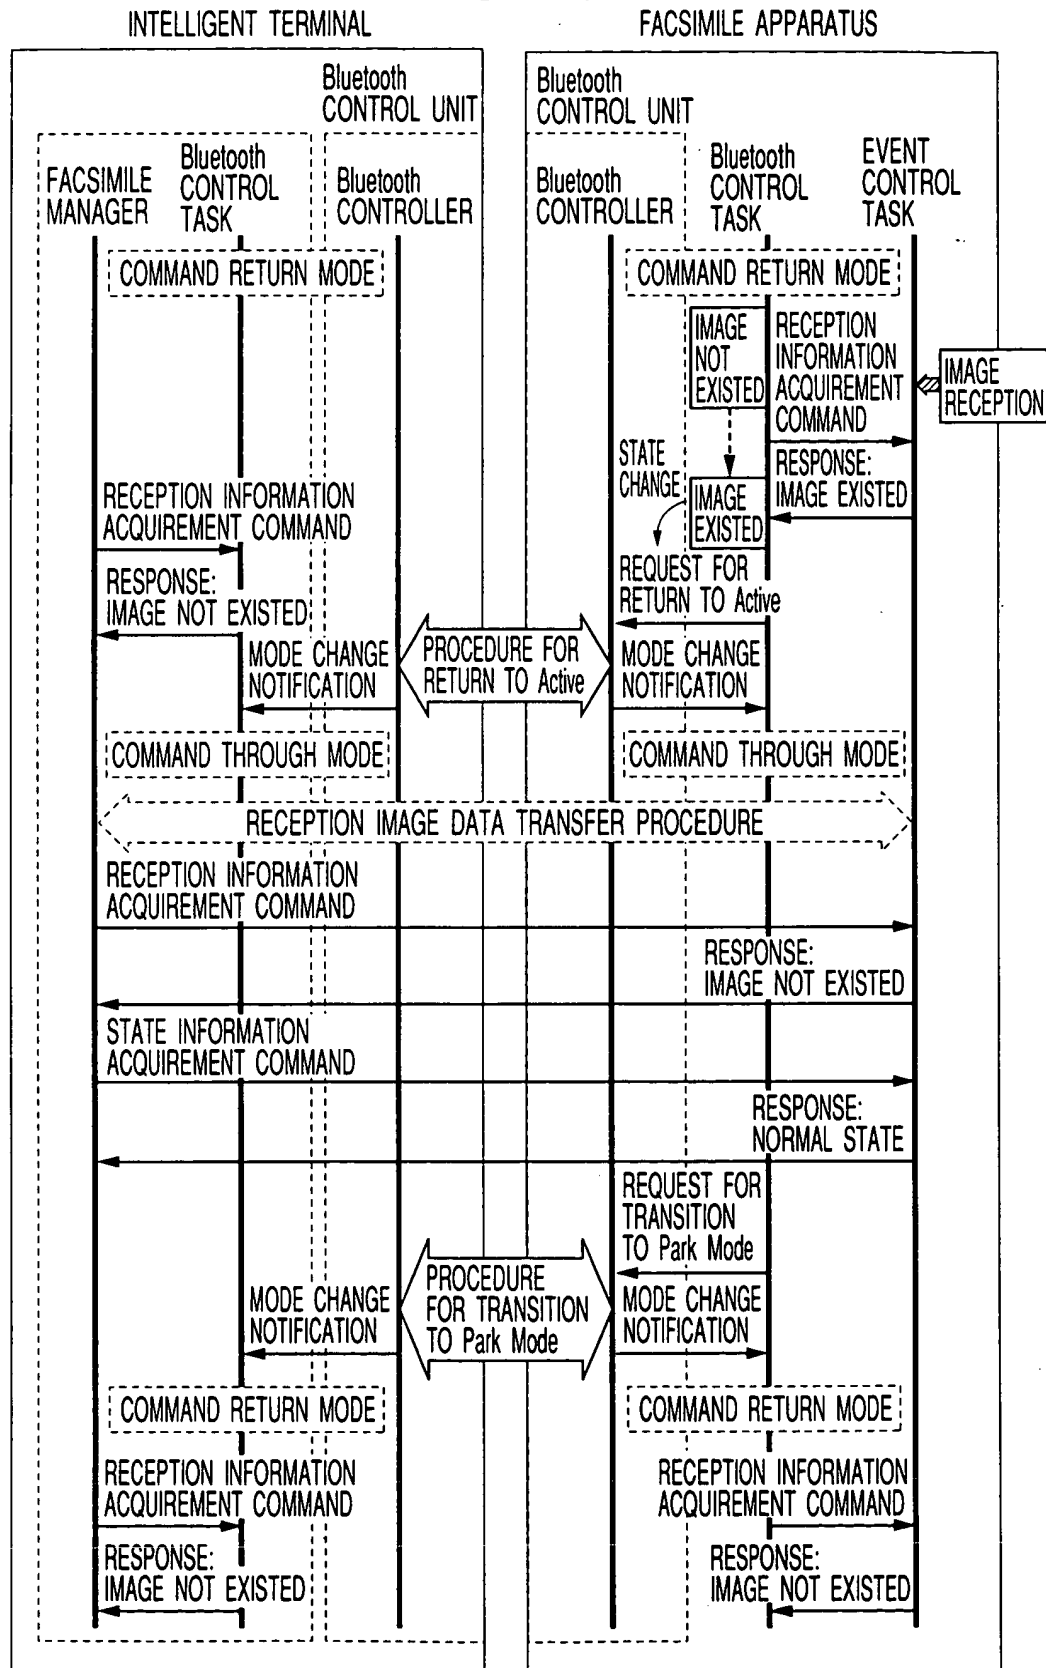
FIG. 6

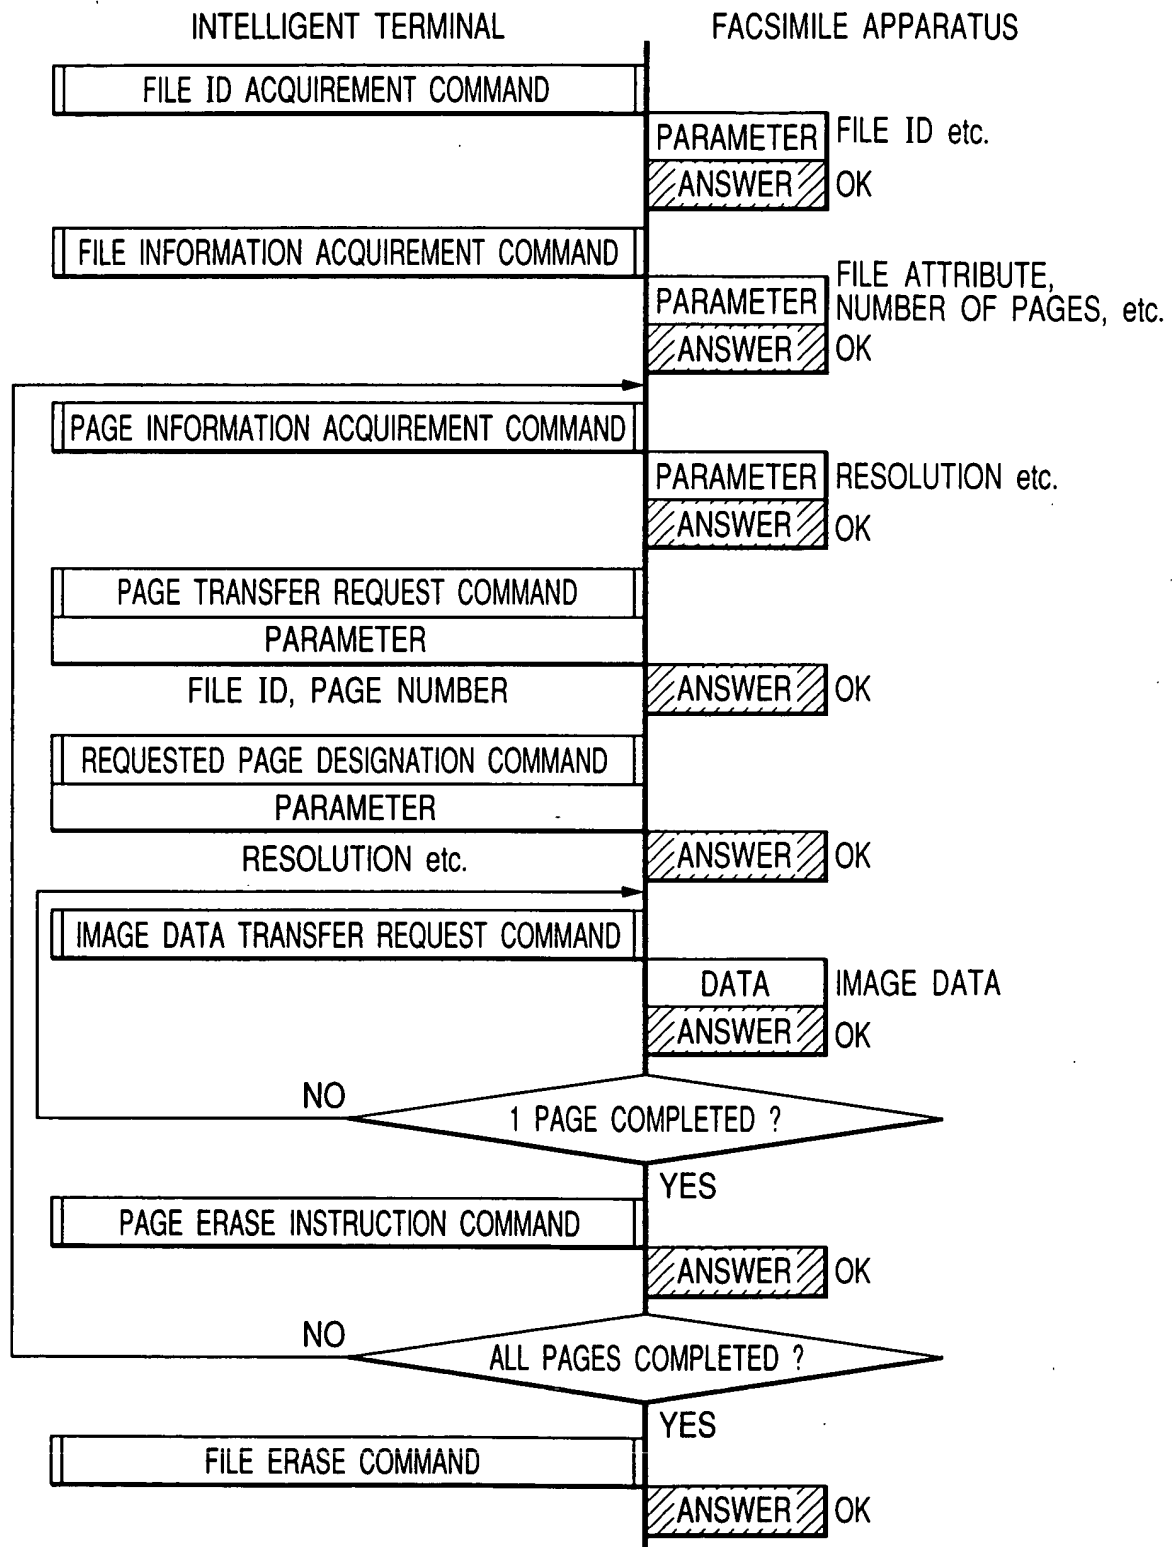
FIG. 7

FIG. 8

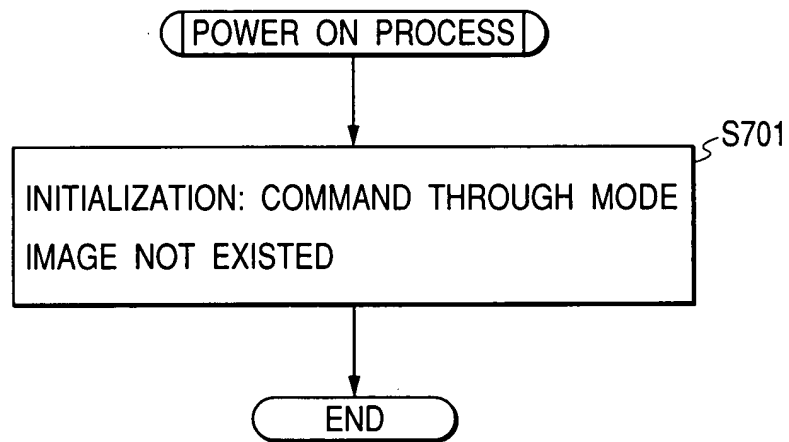


FIG. 9

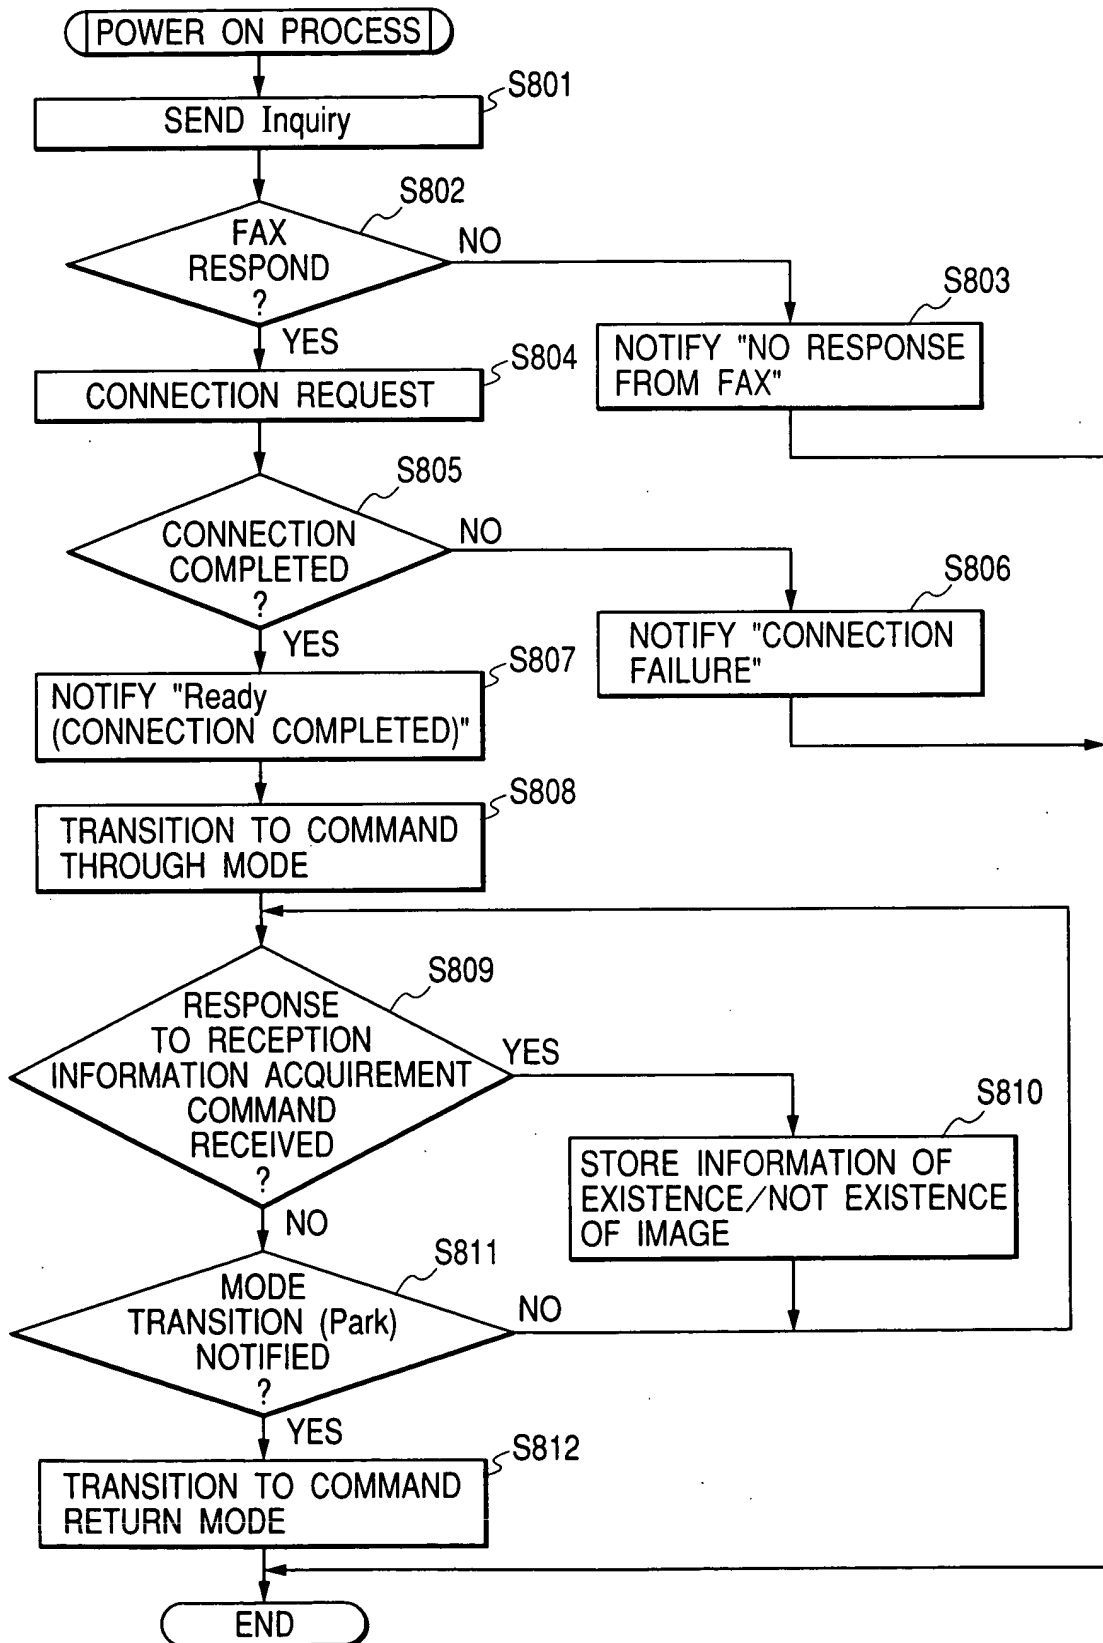
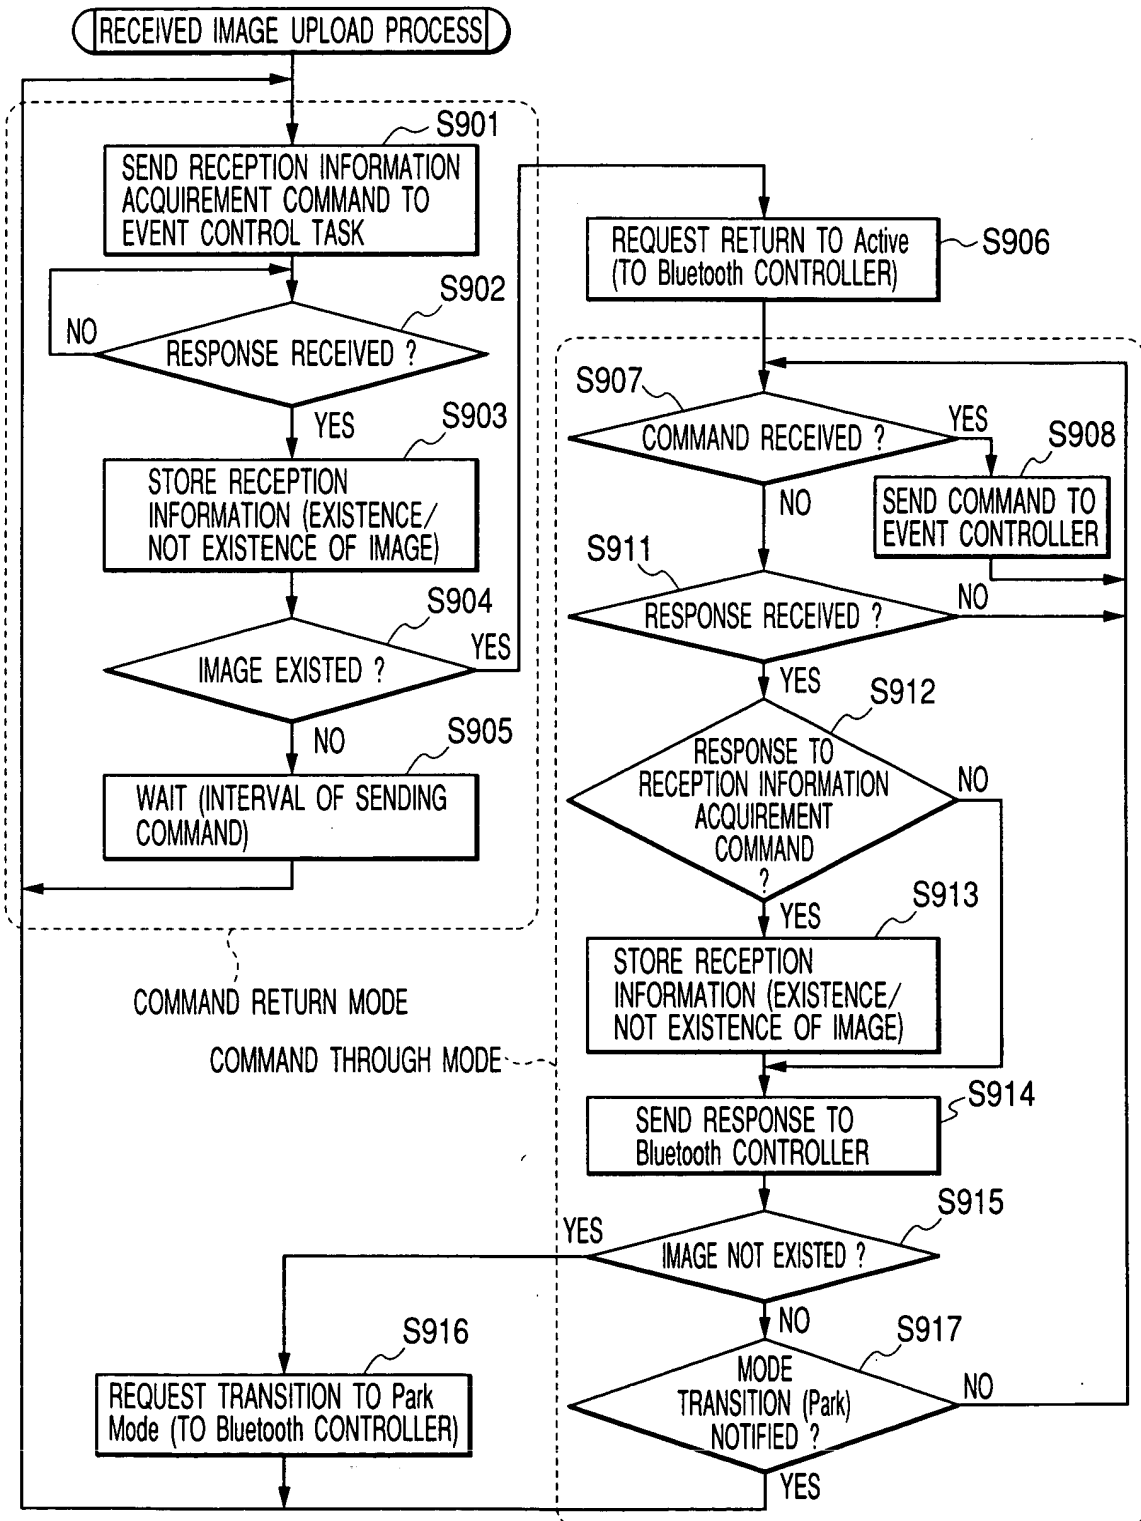


FIG. 10



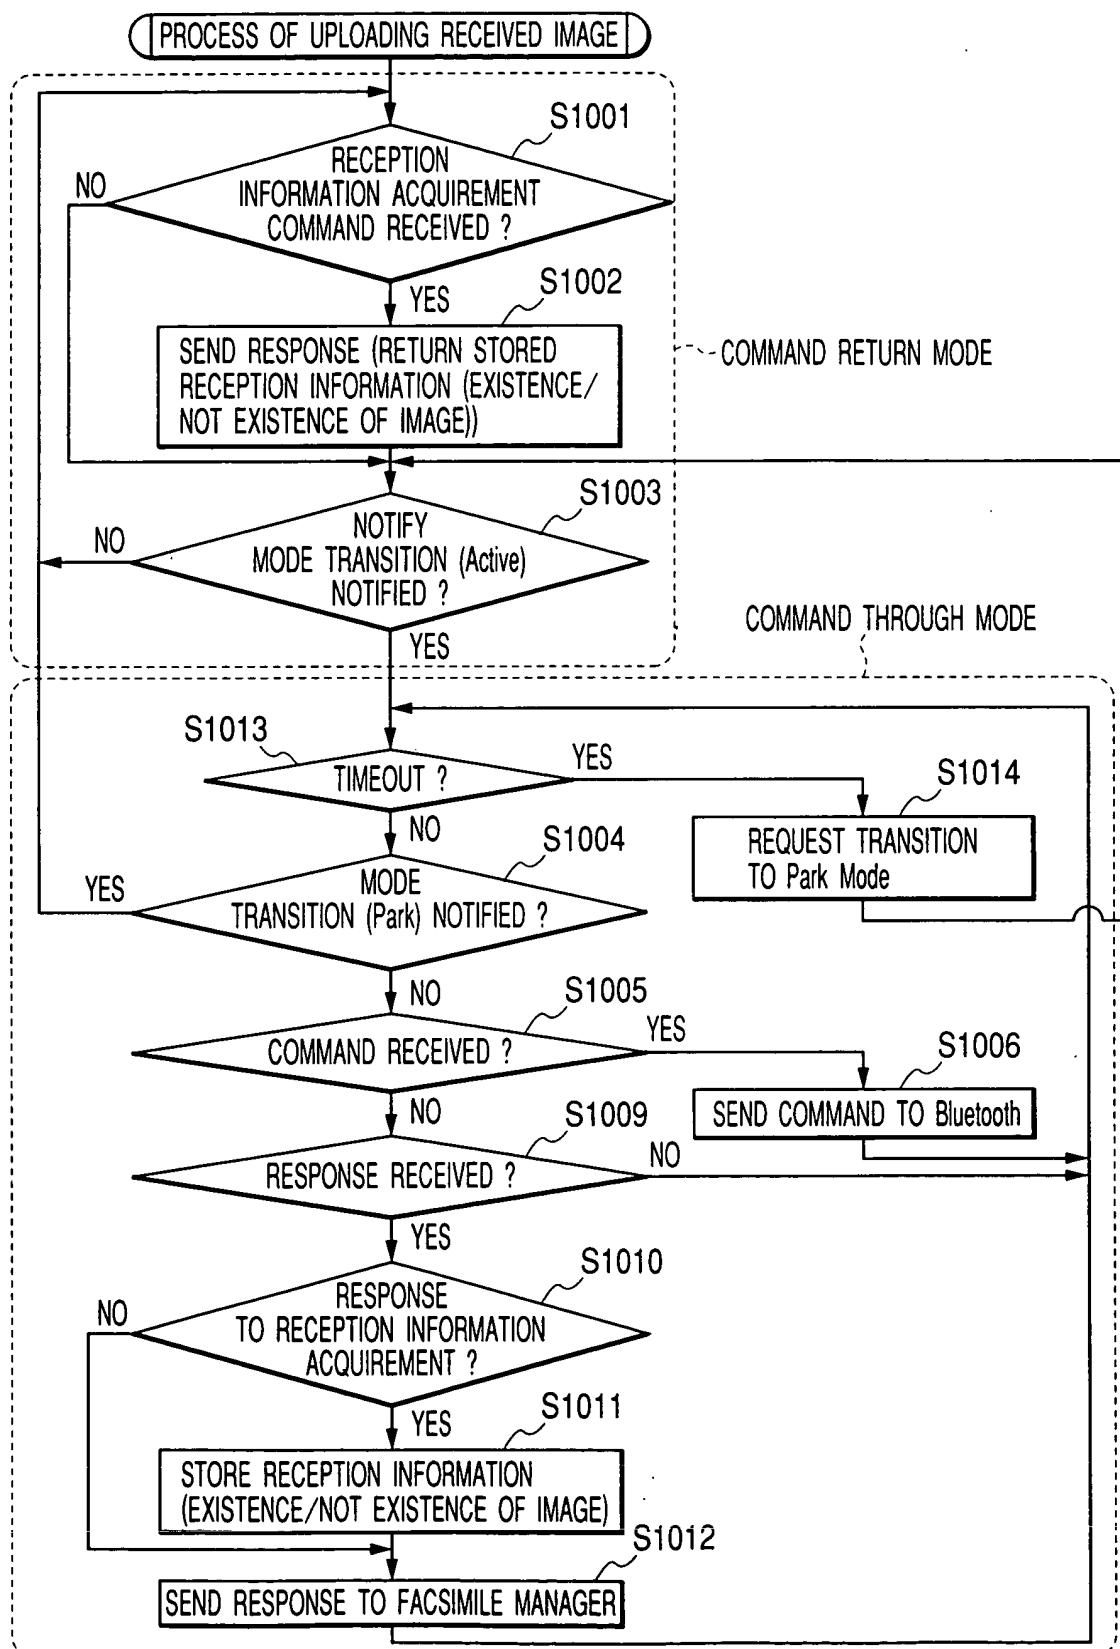


FIG. 12

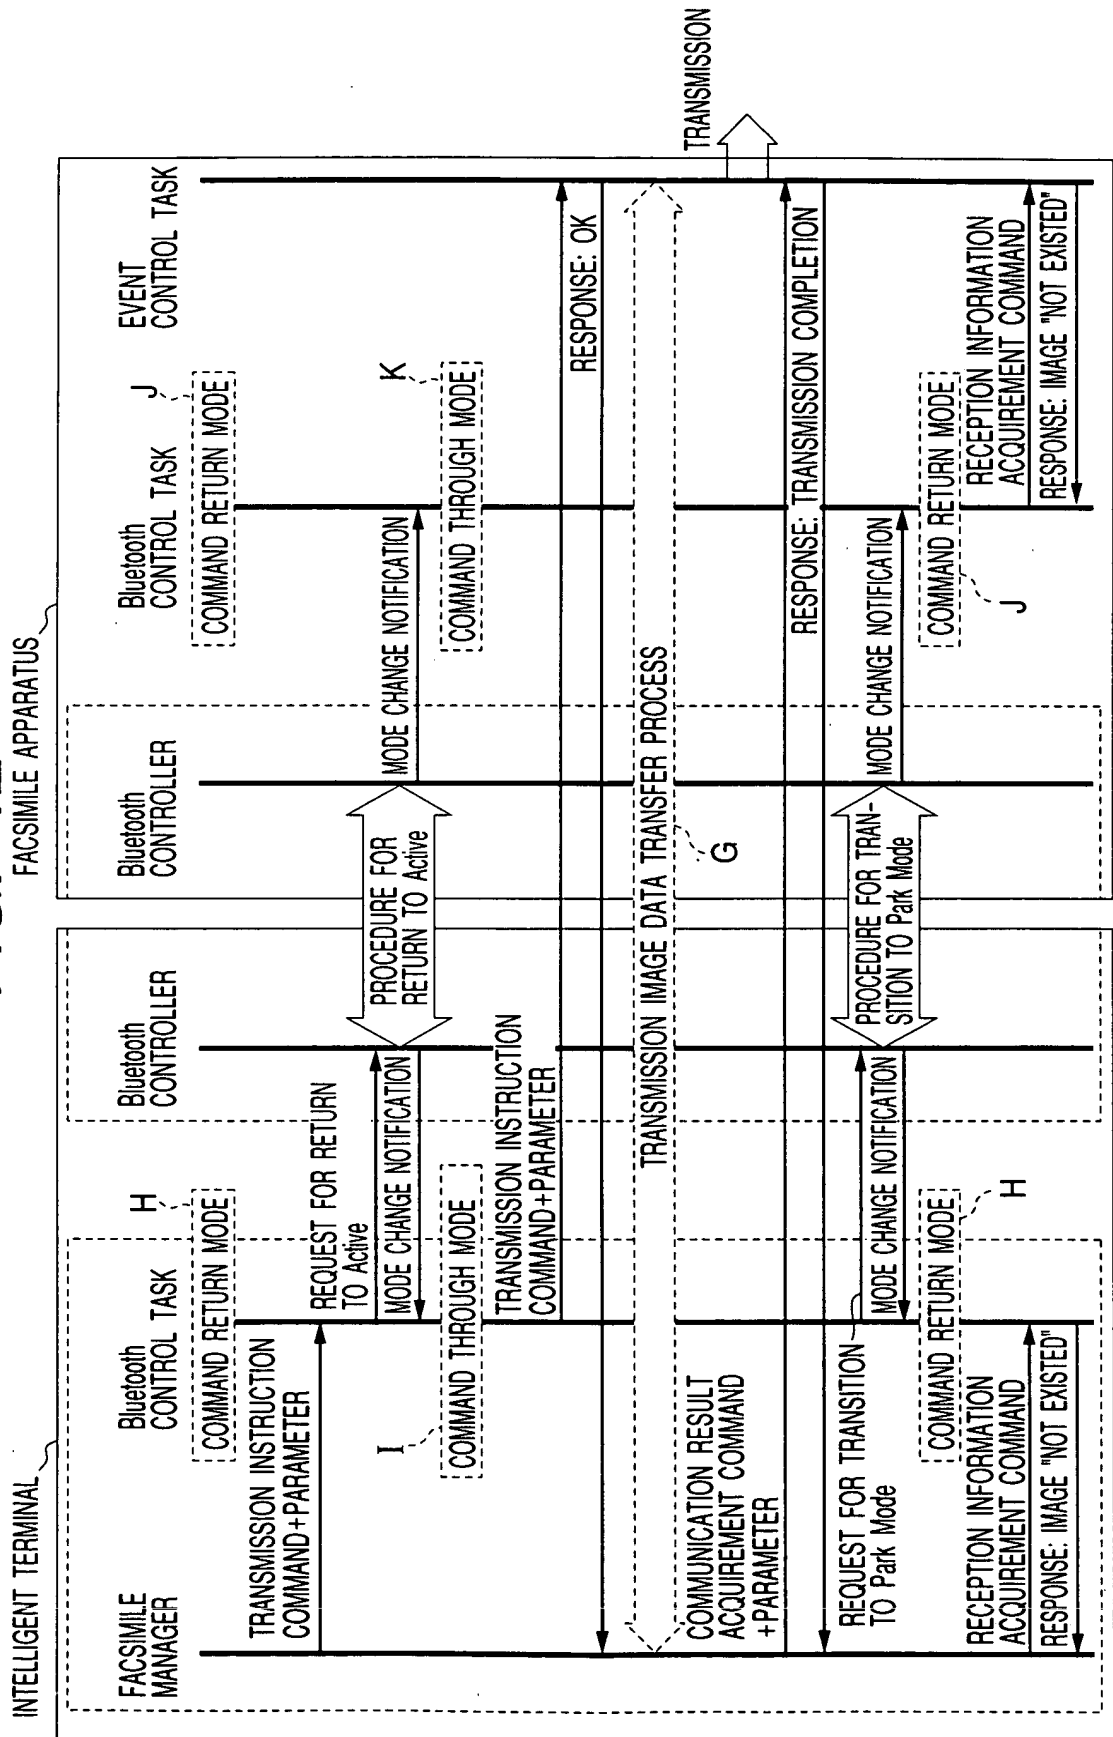
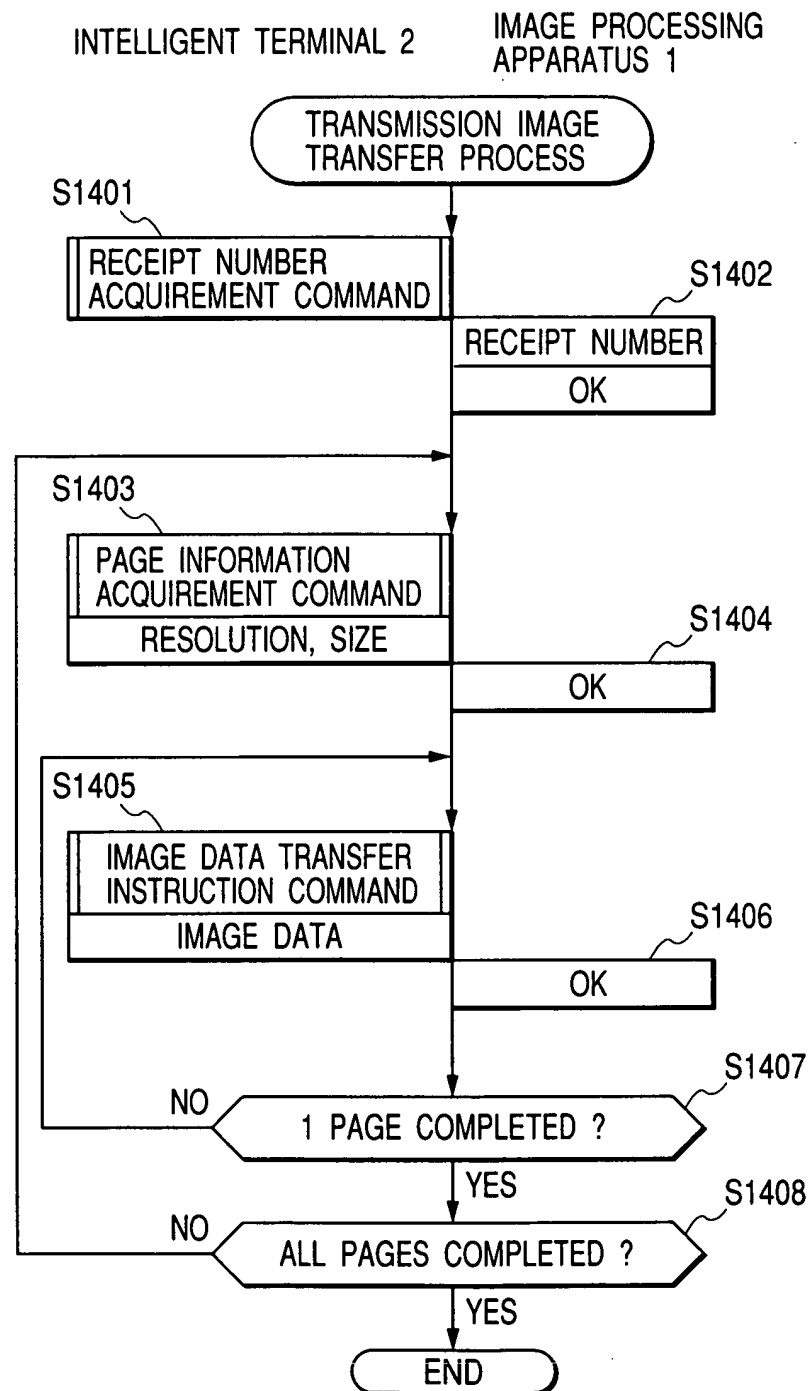


FIG. 14

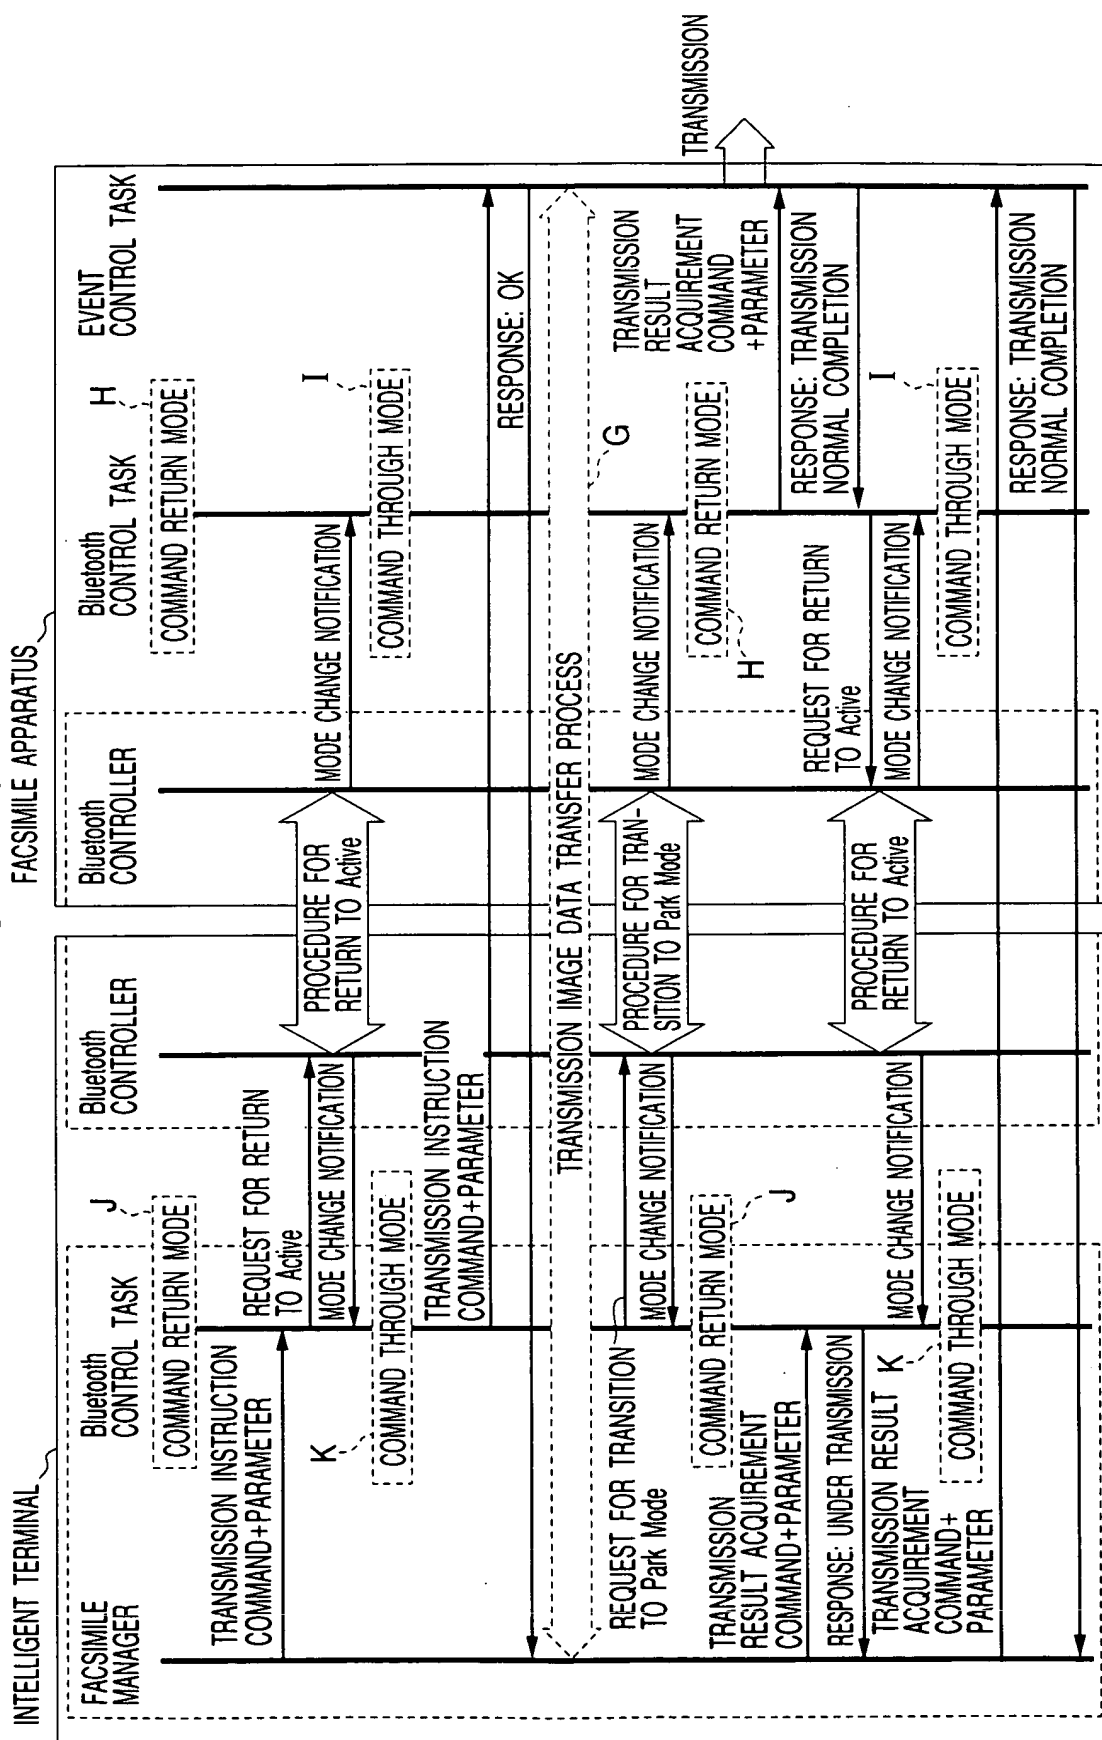
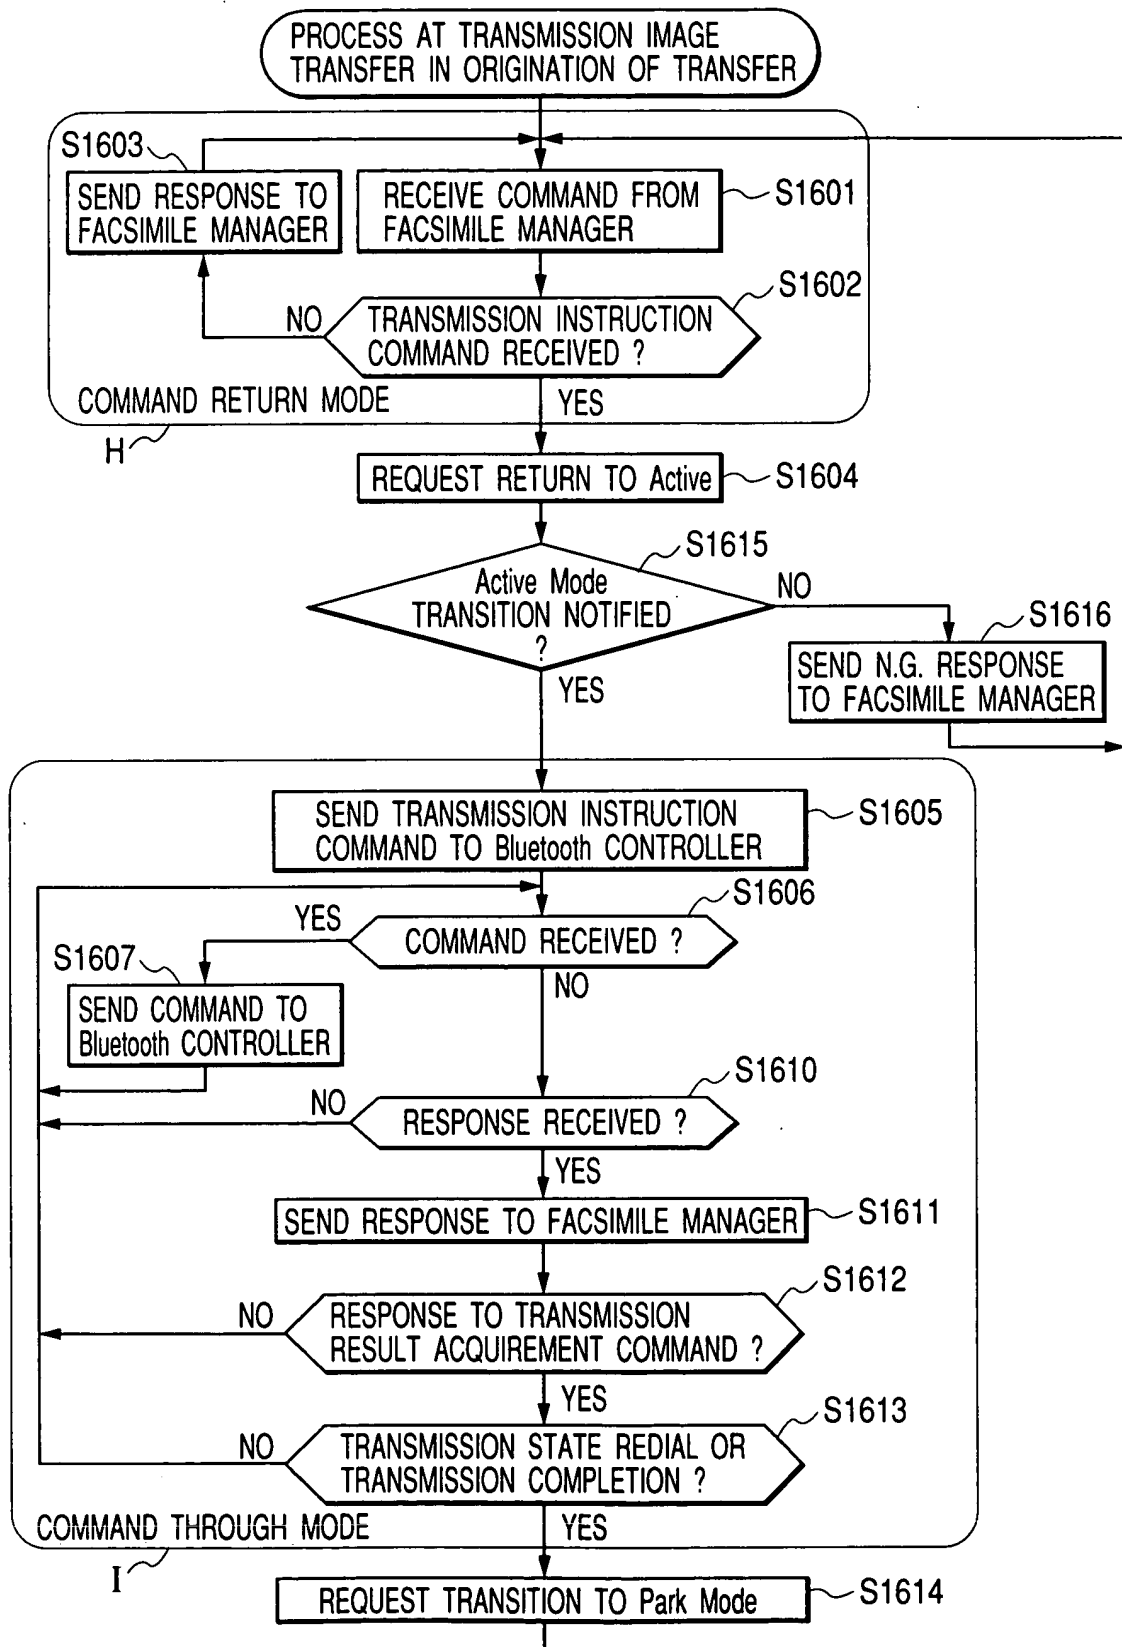


FIG. 16

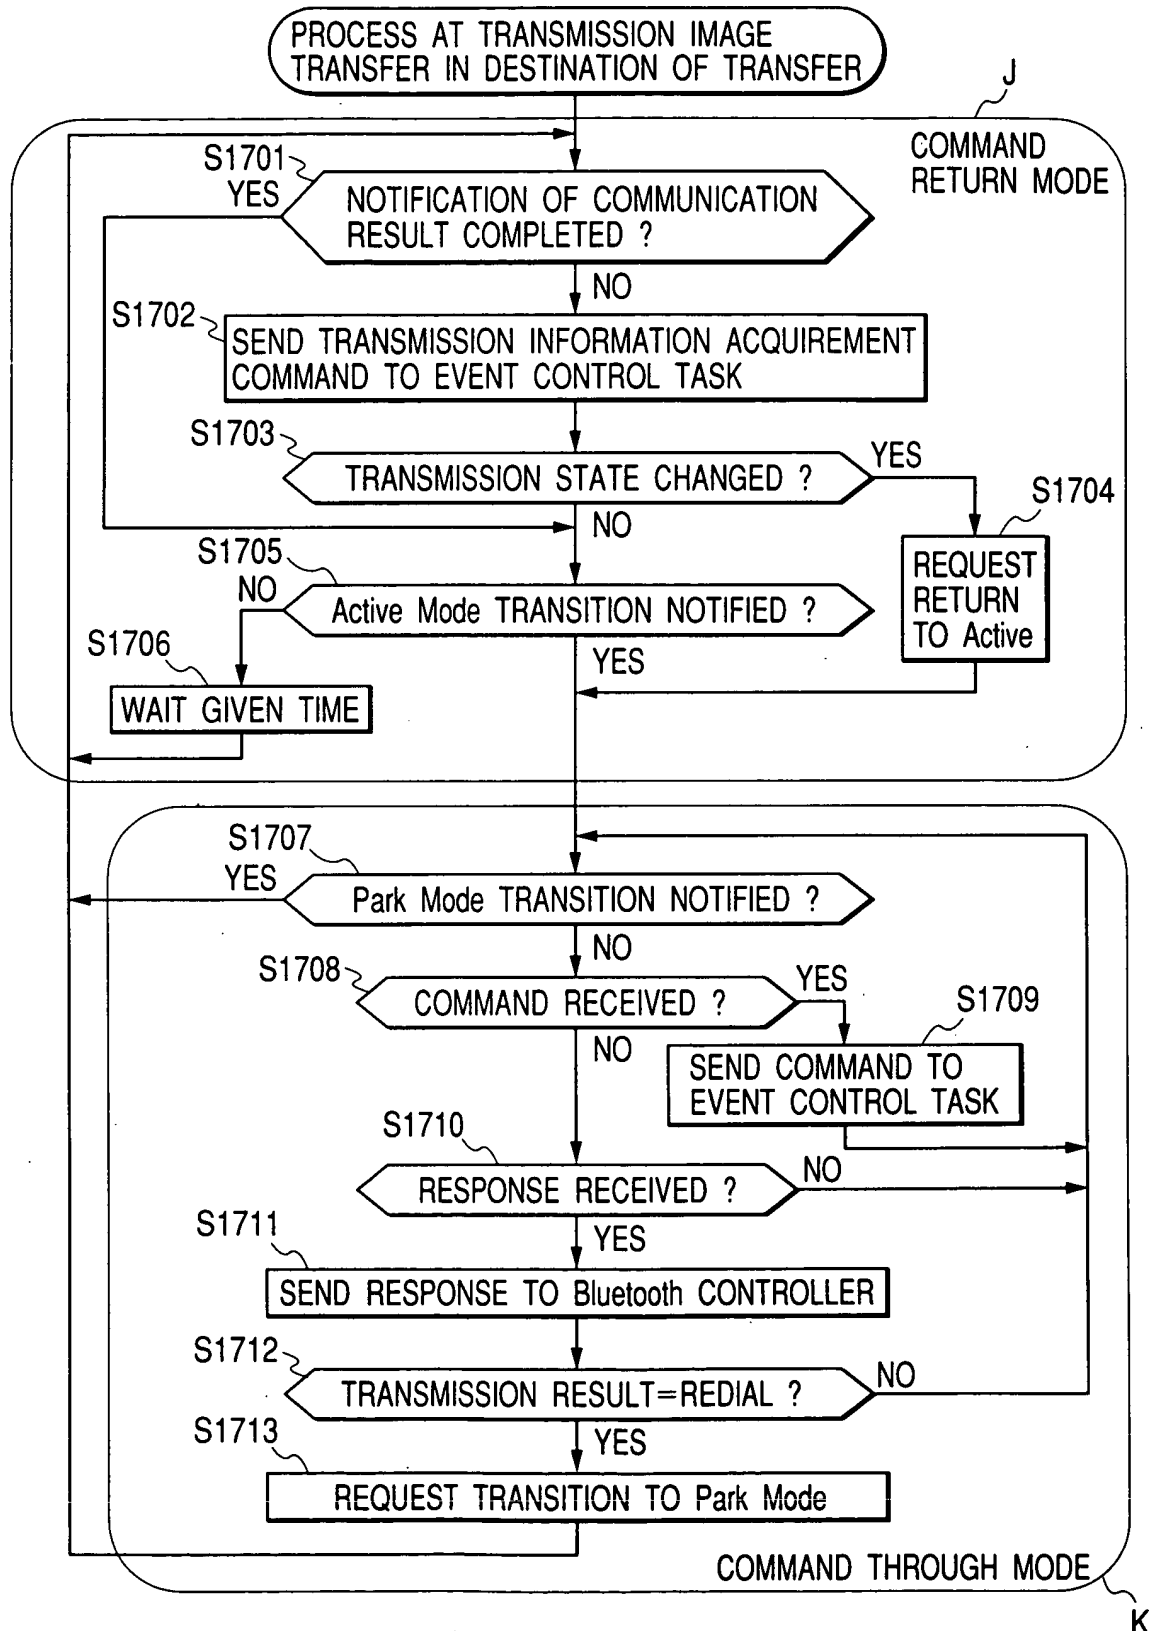


FIG. 18

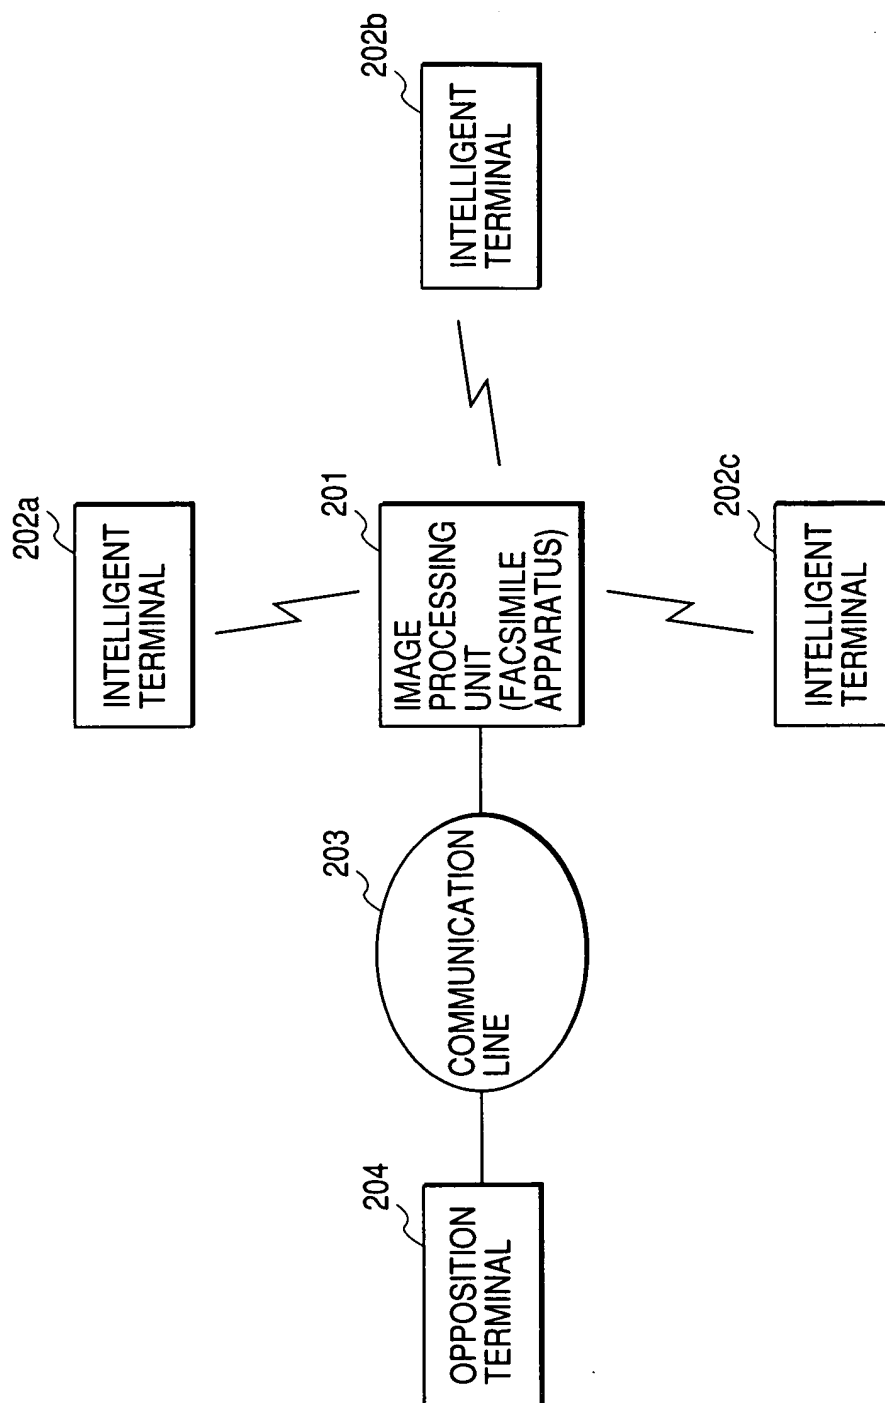


FIG. 19

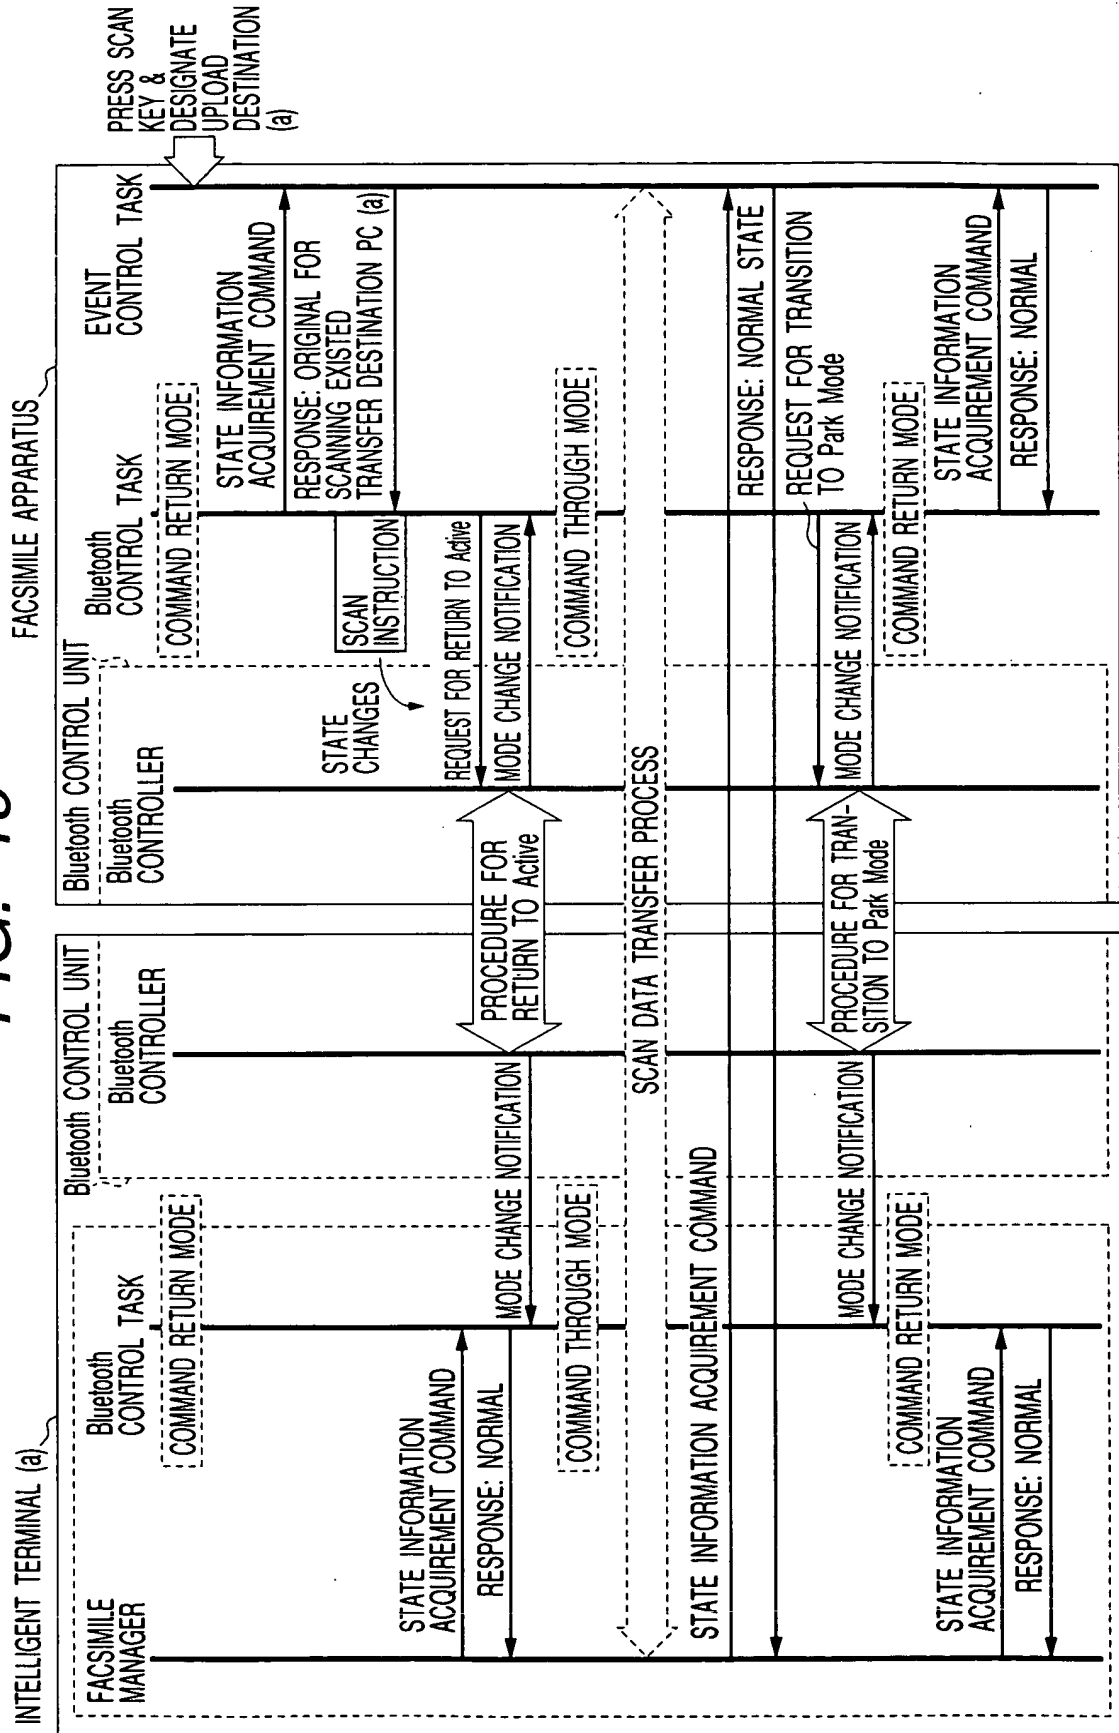


FIG. 20

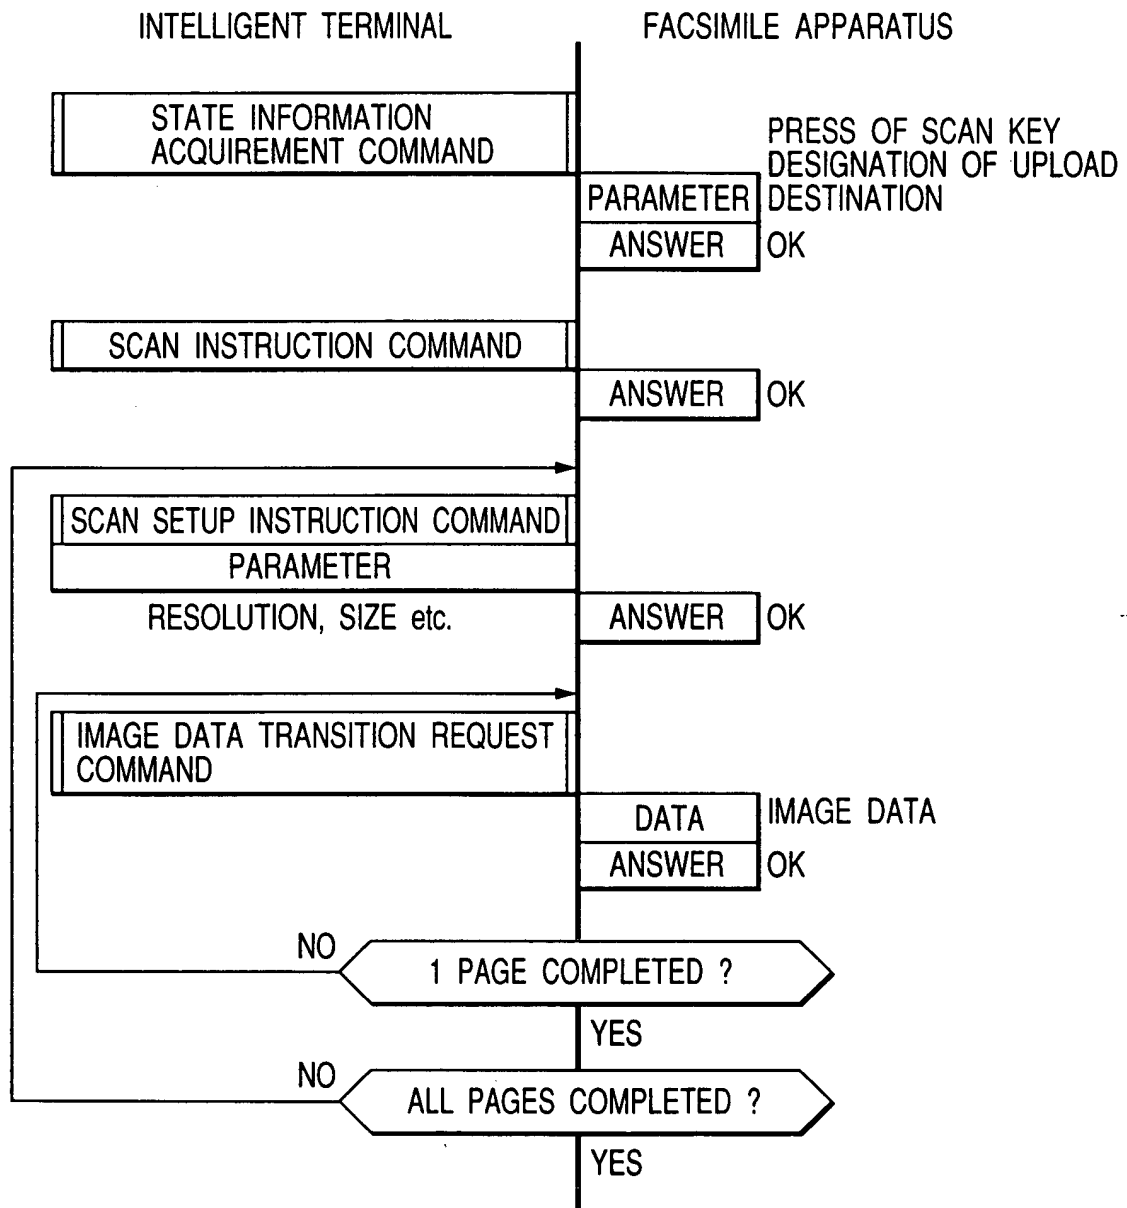


FIG. 21

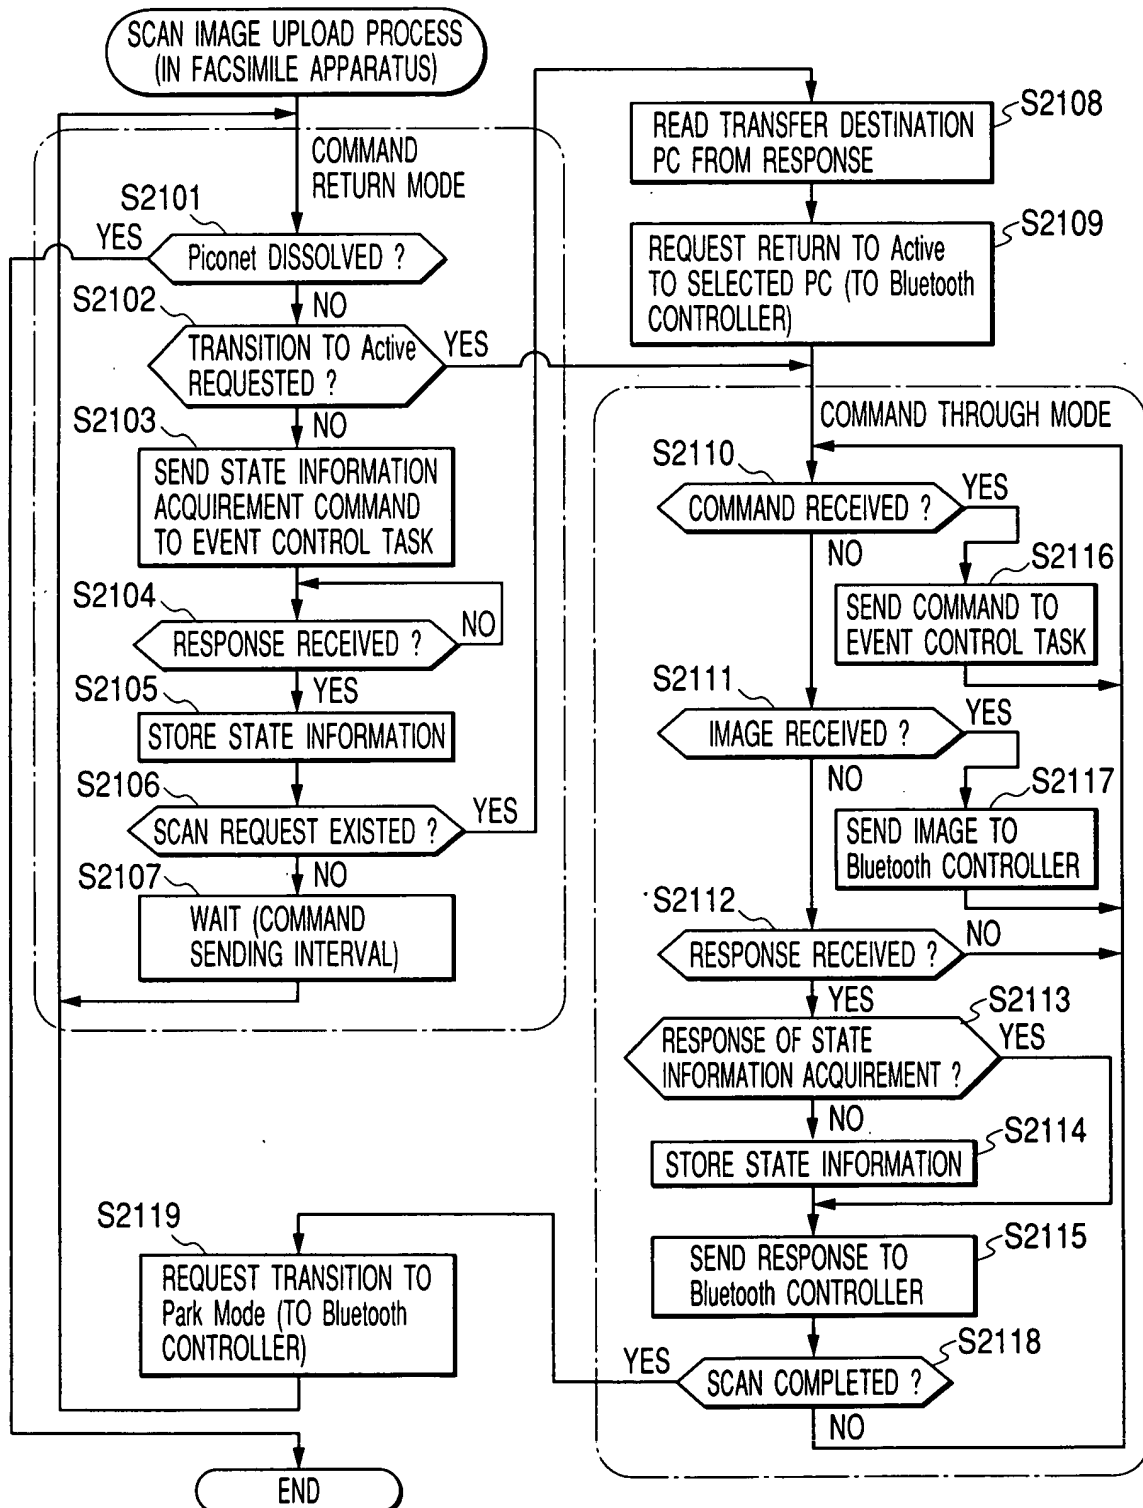


FIG. 22

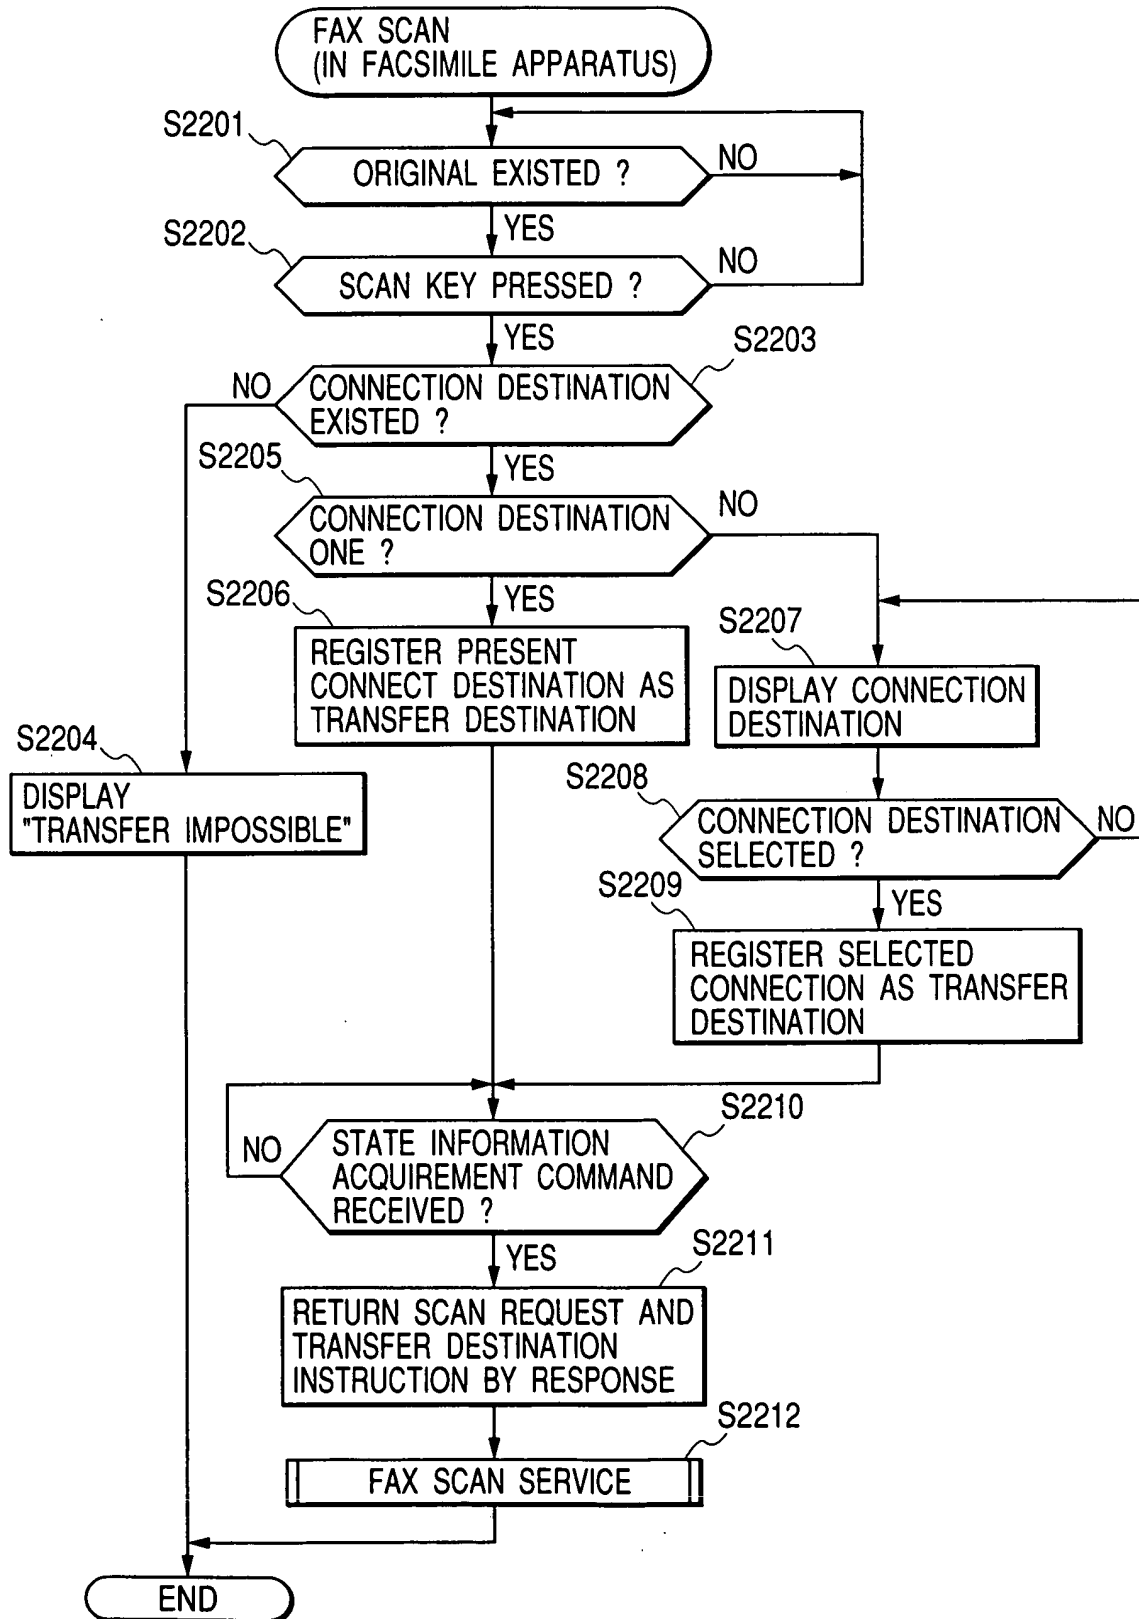


FIG. 23

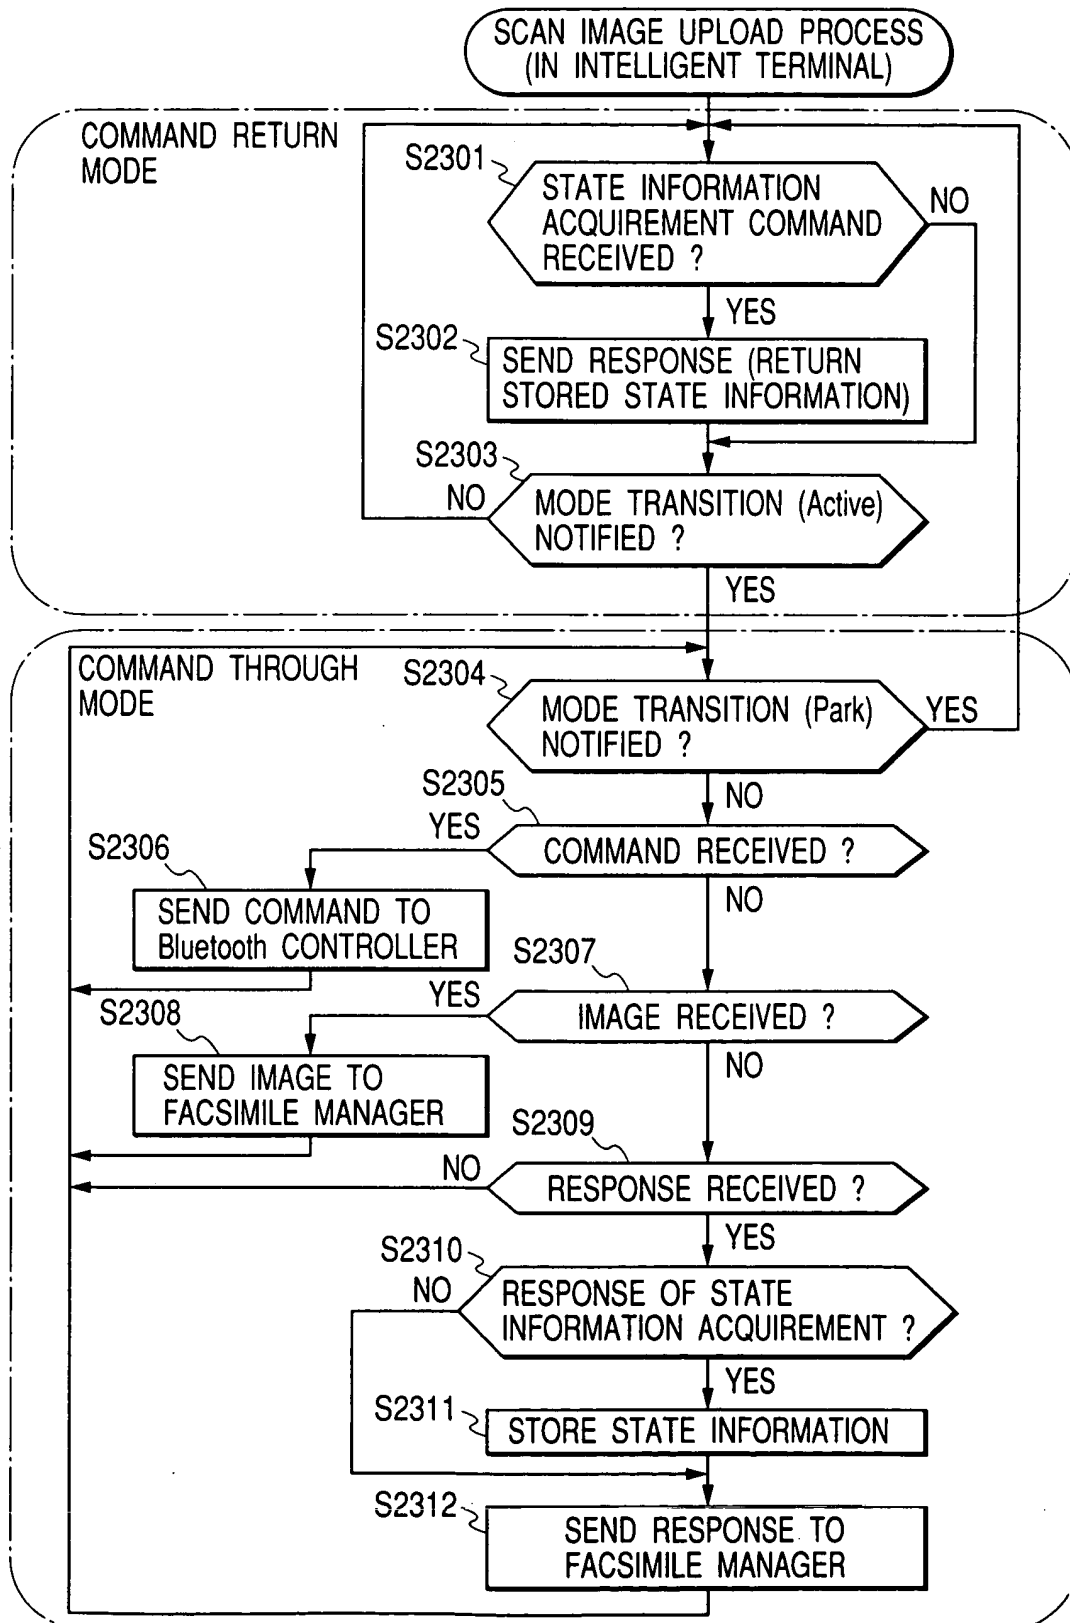


FIG. 24

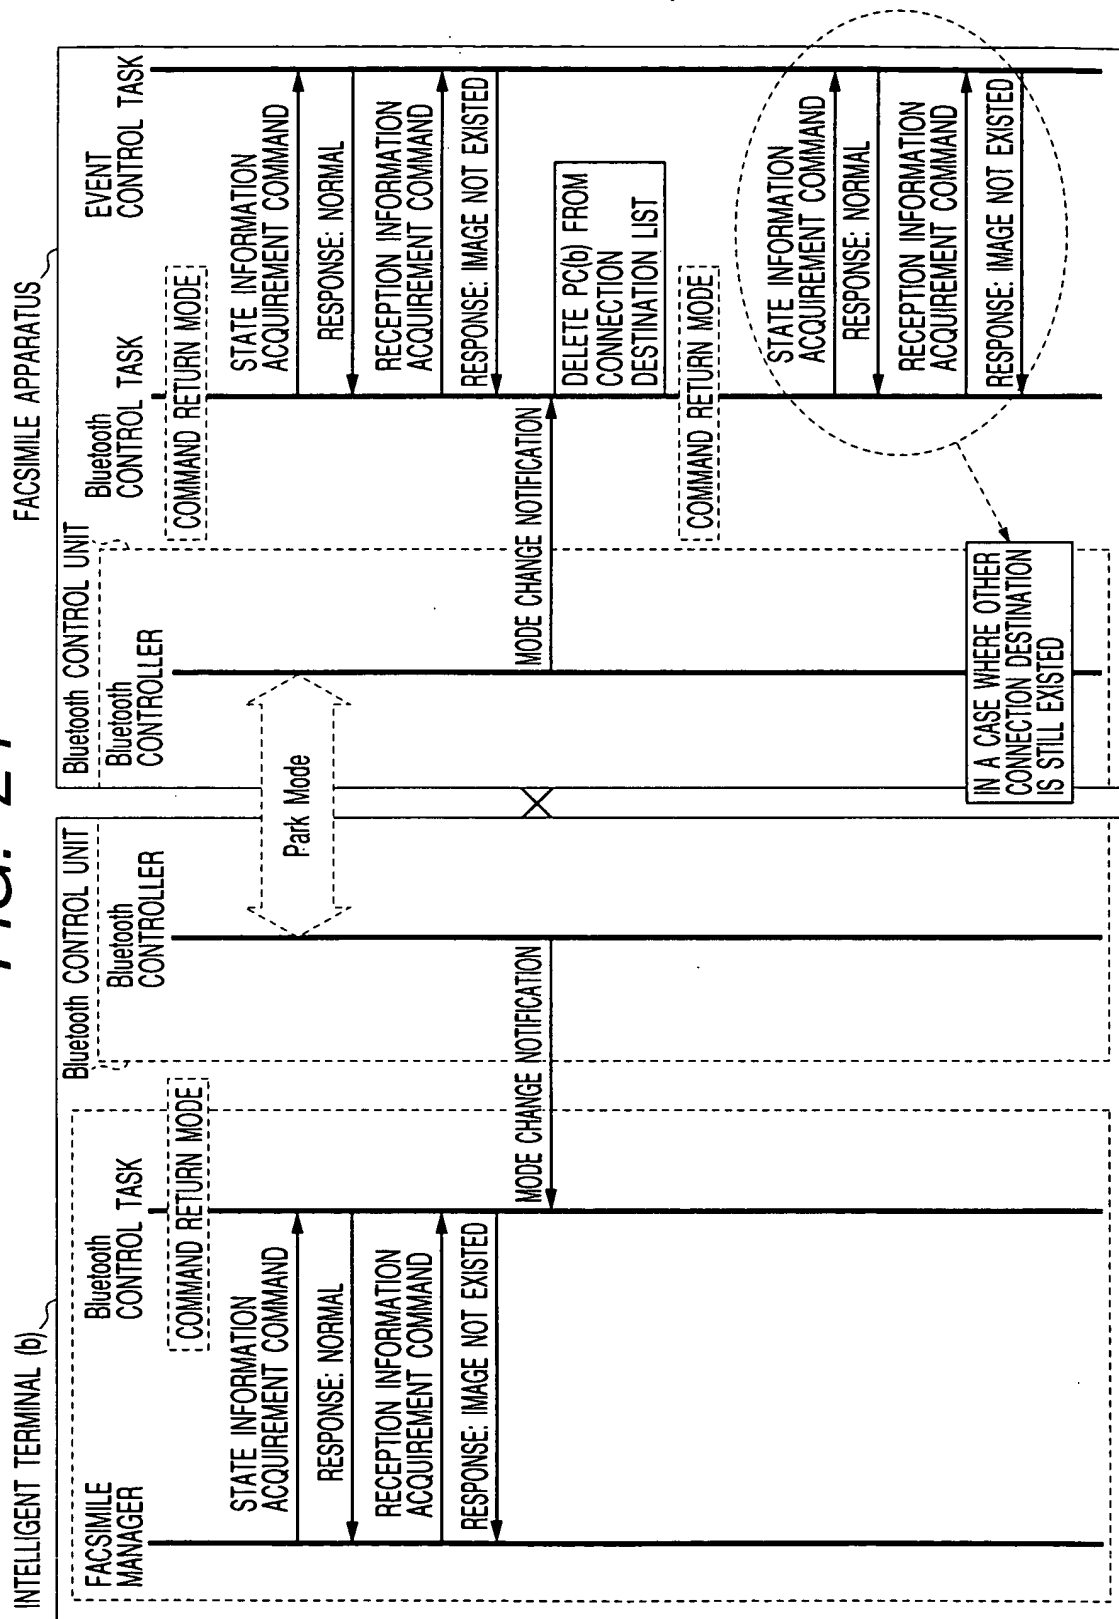


FIG. 25

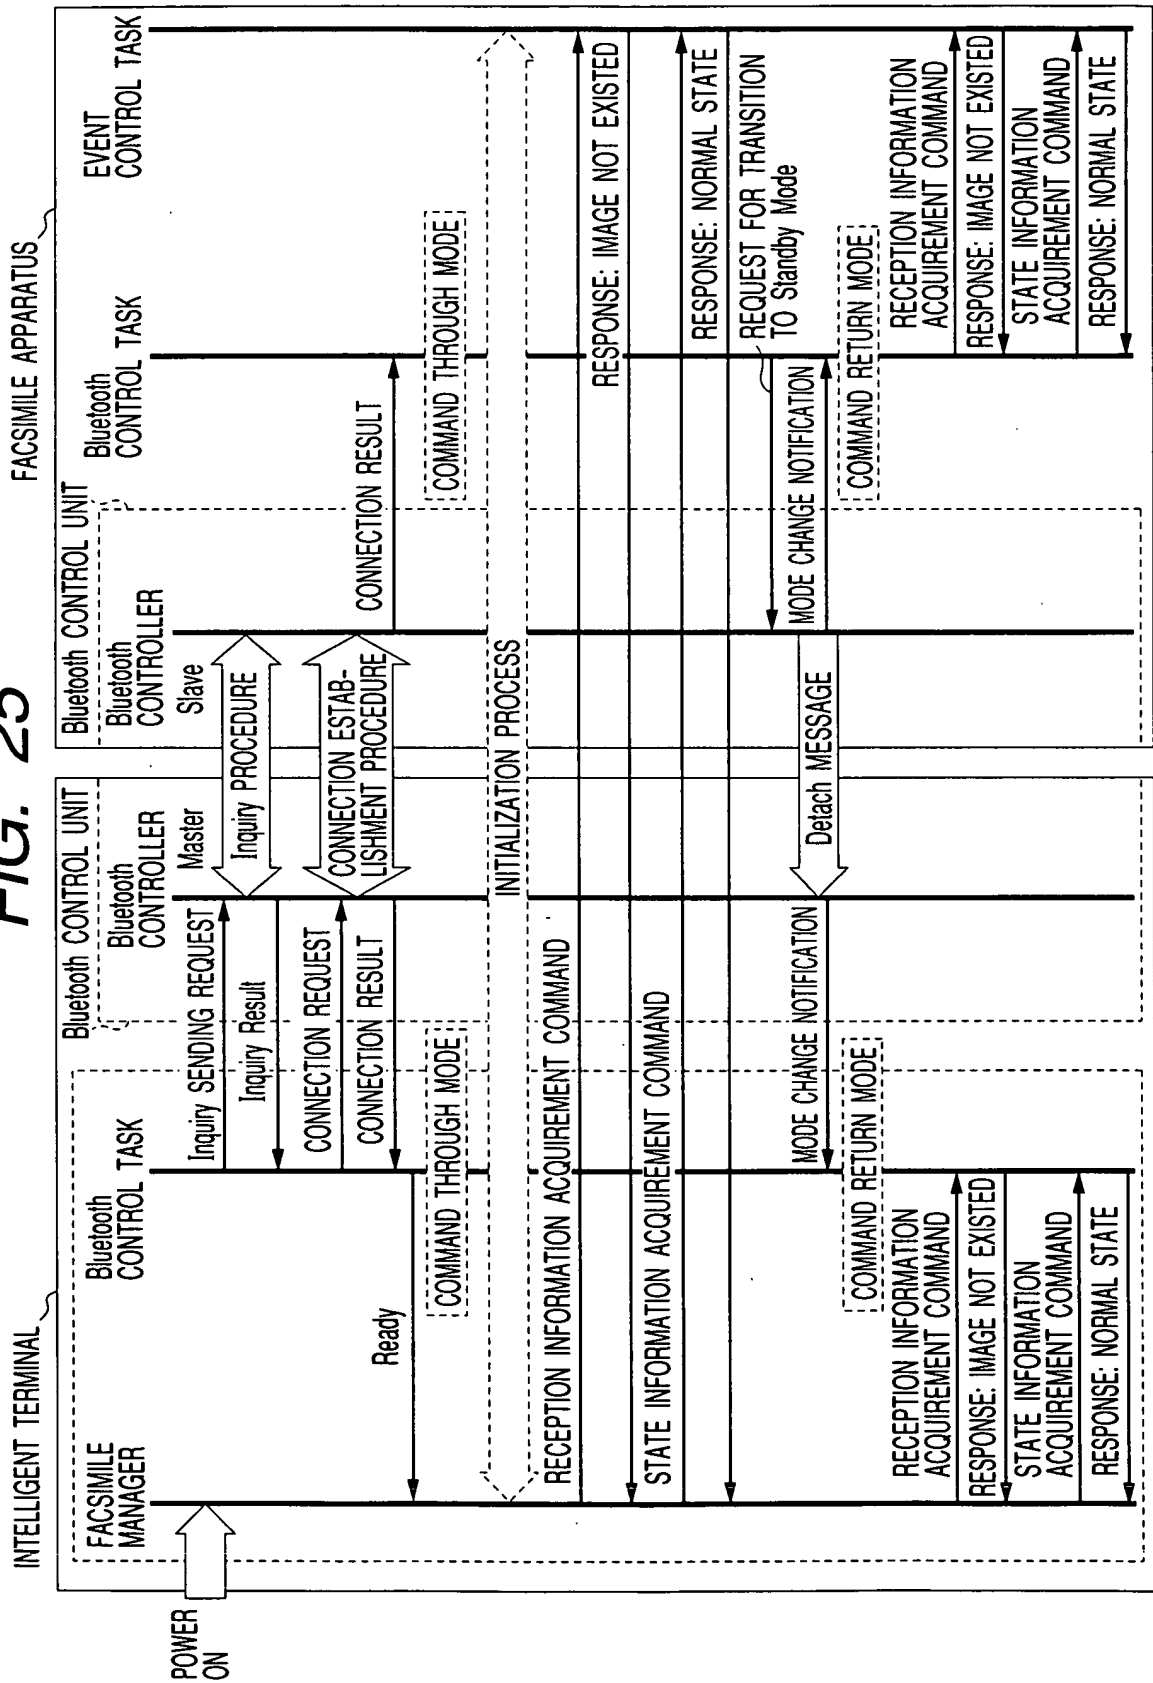


FIG. 26

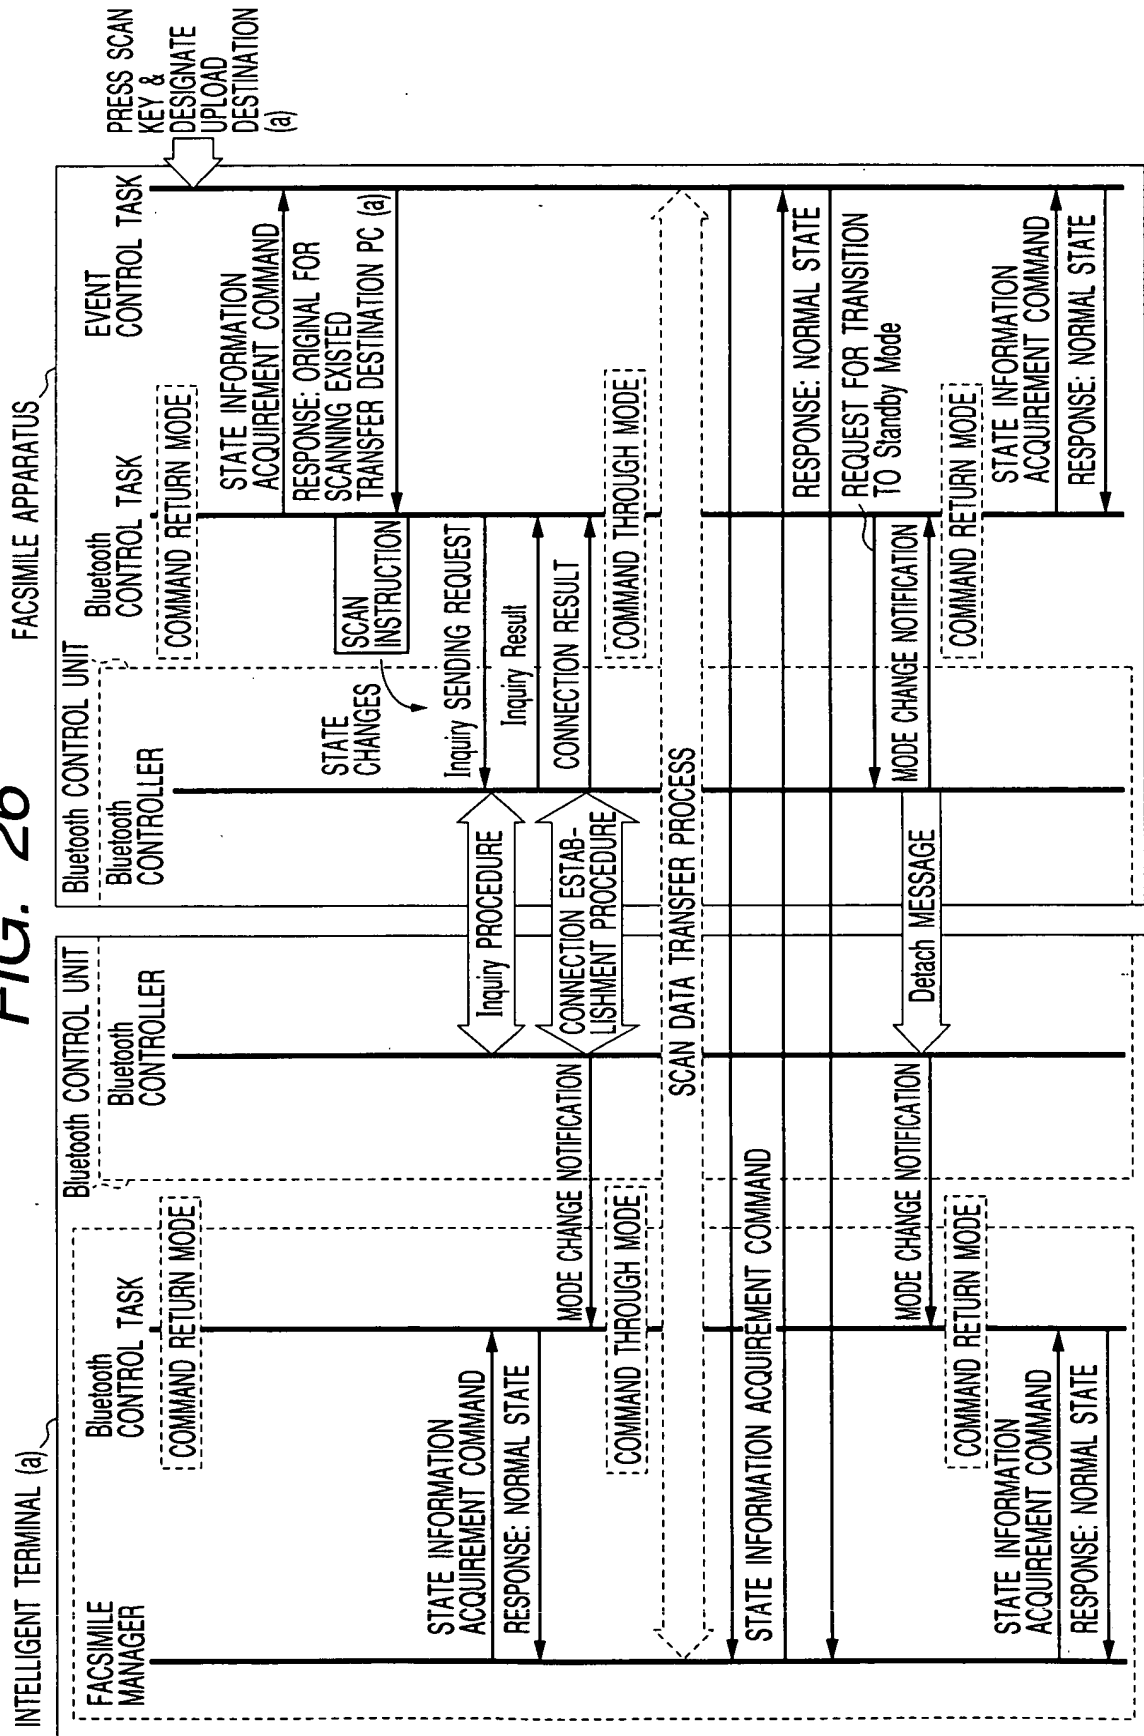


FIG. 27

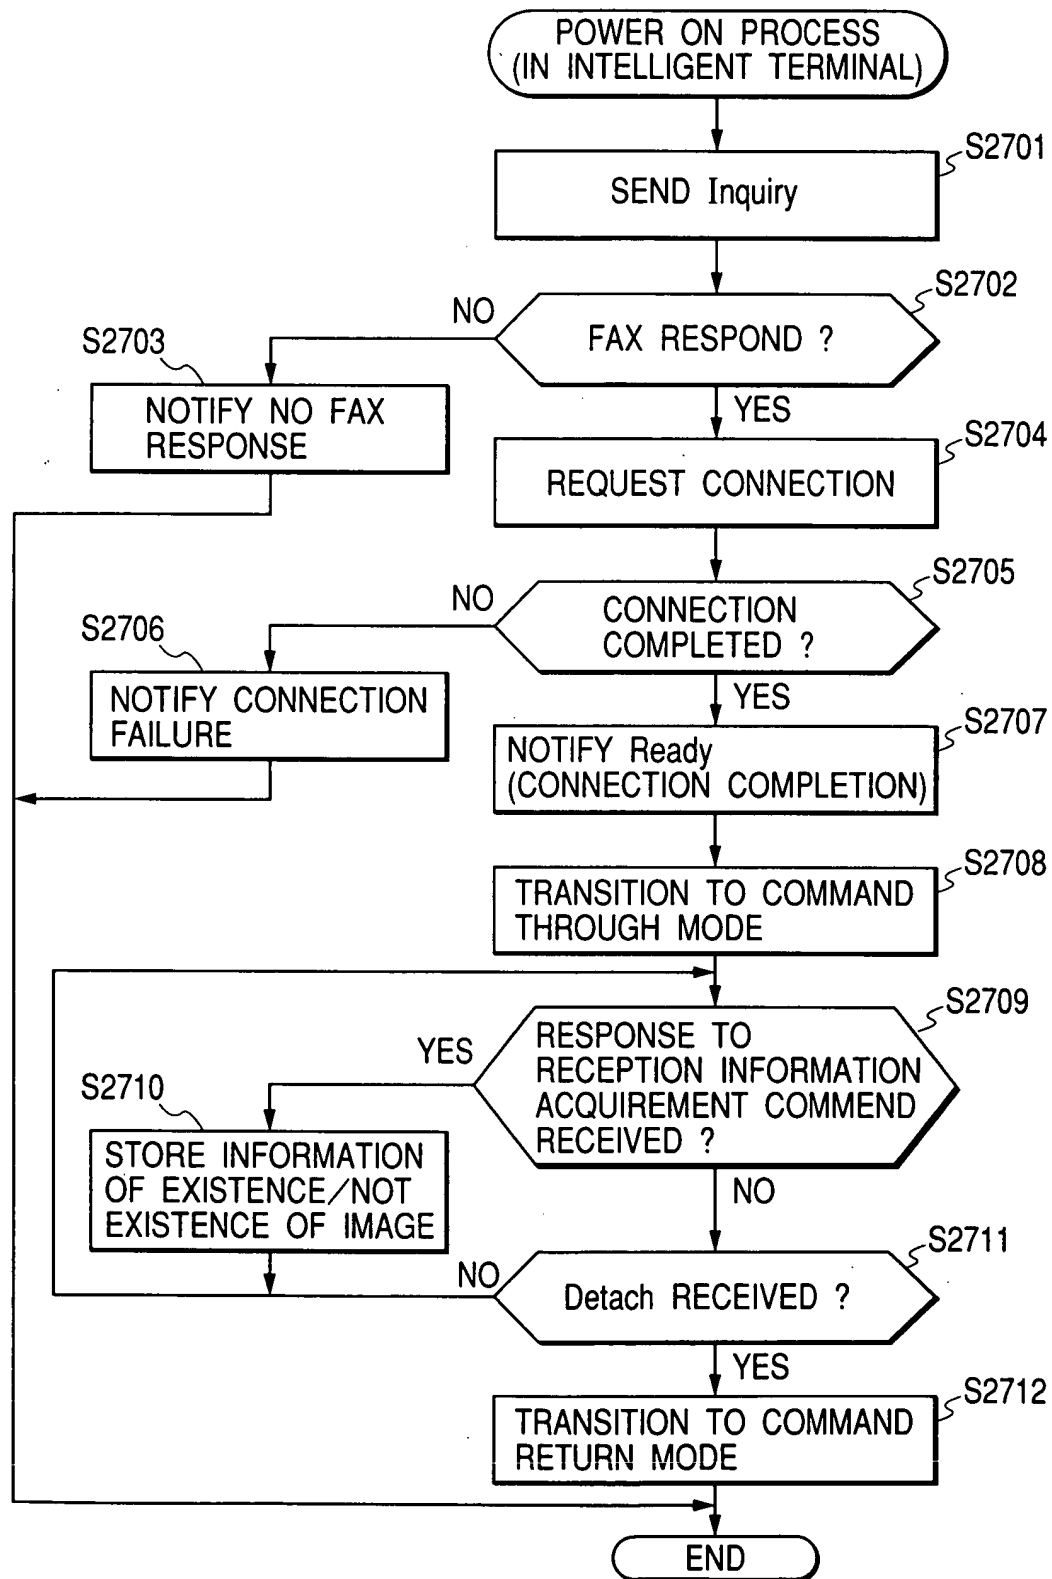
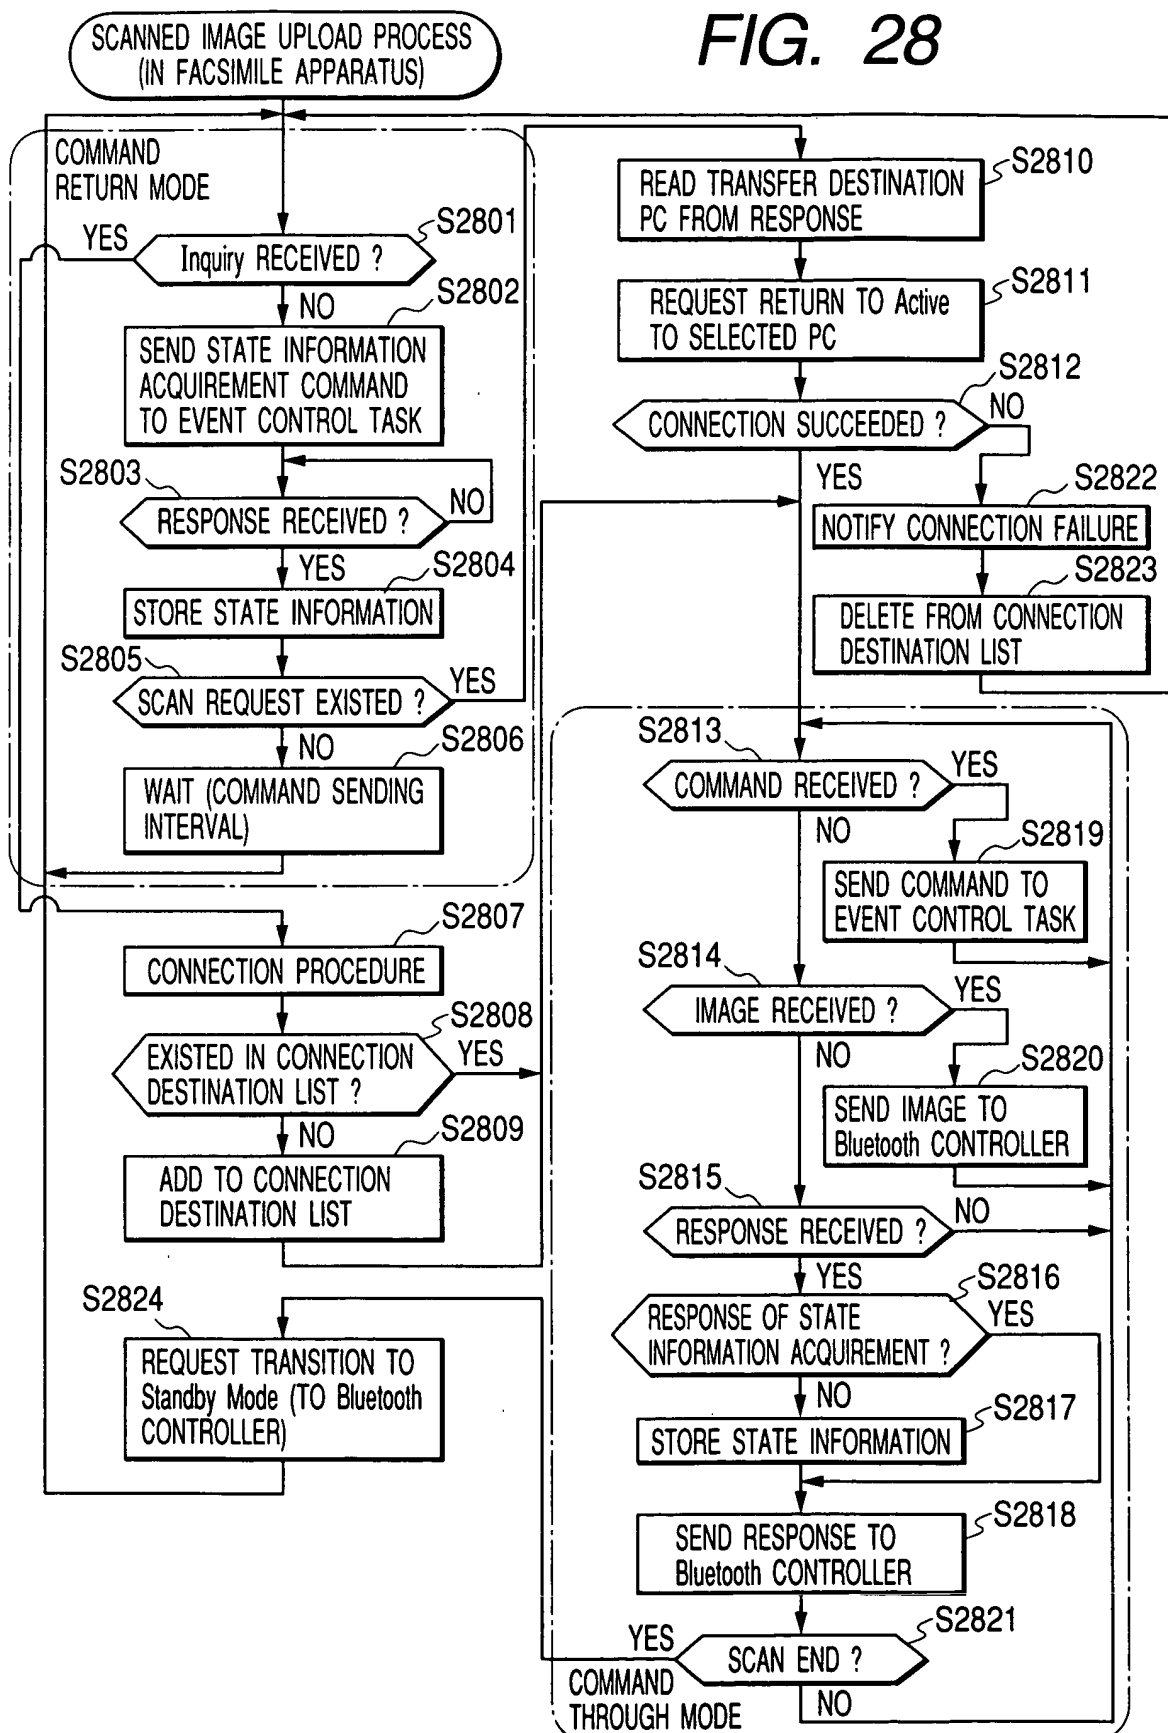
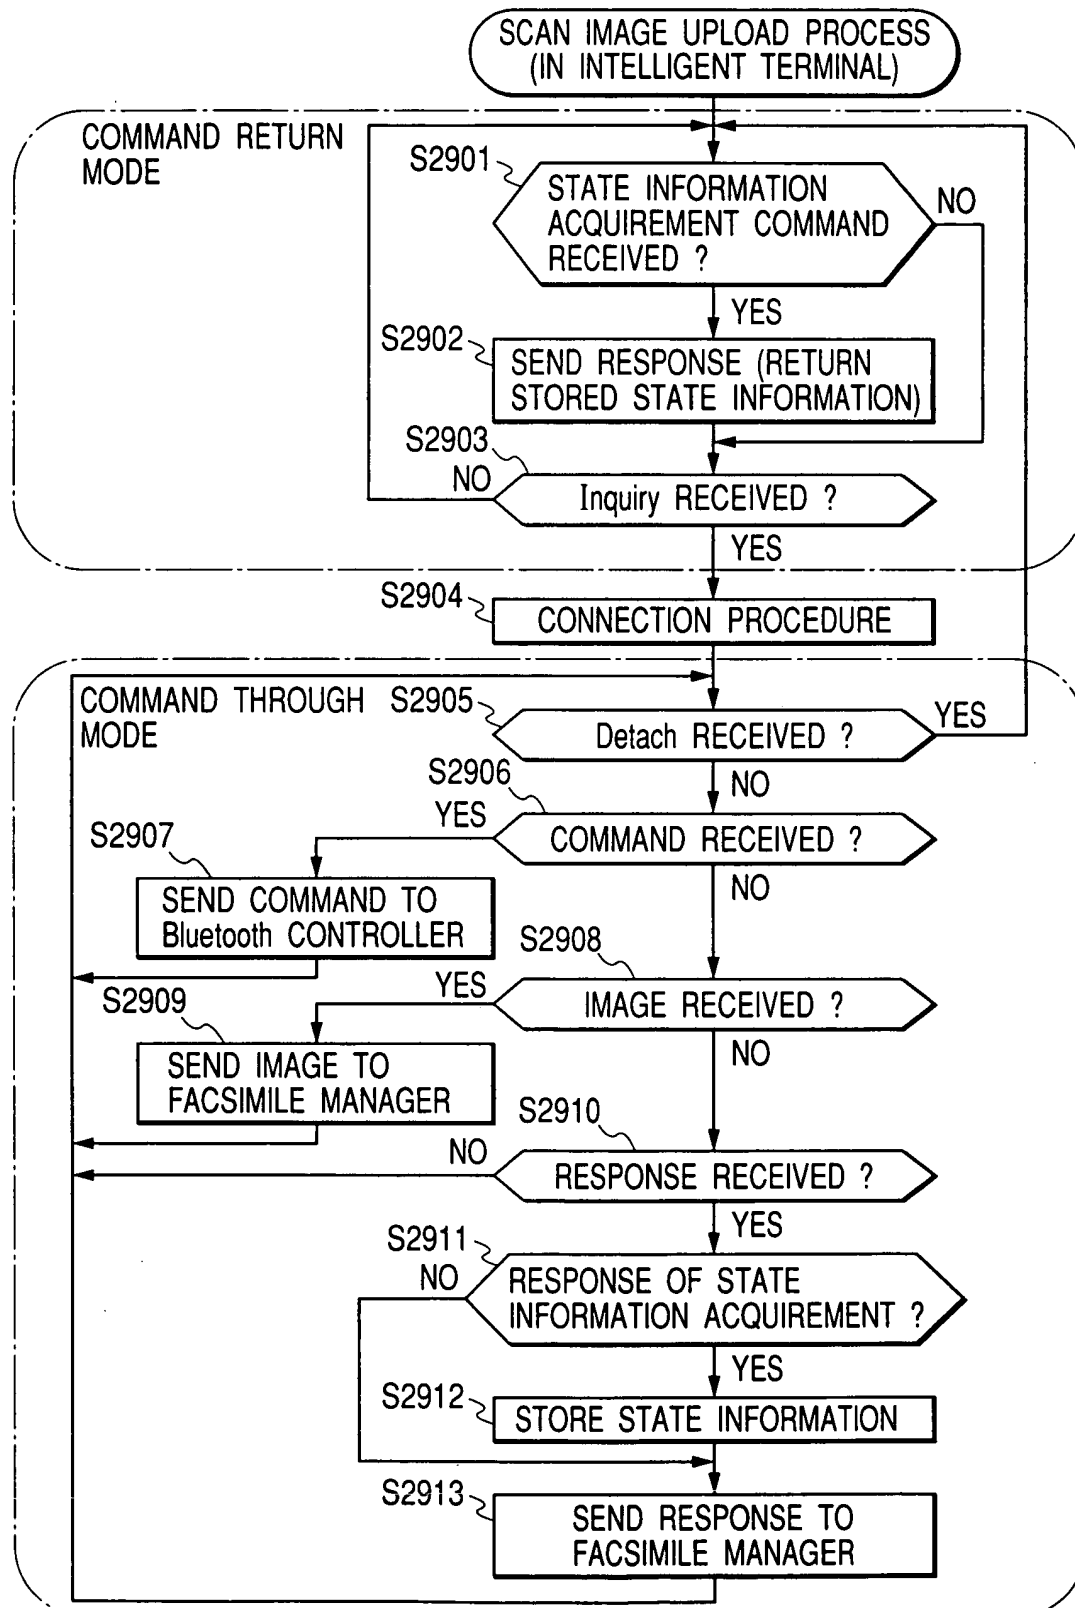


FIG. 28





FACSIMILE APPARATUS.

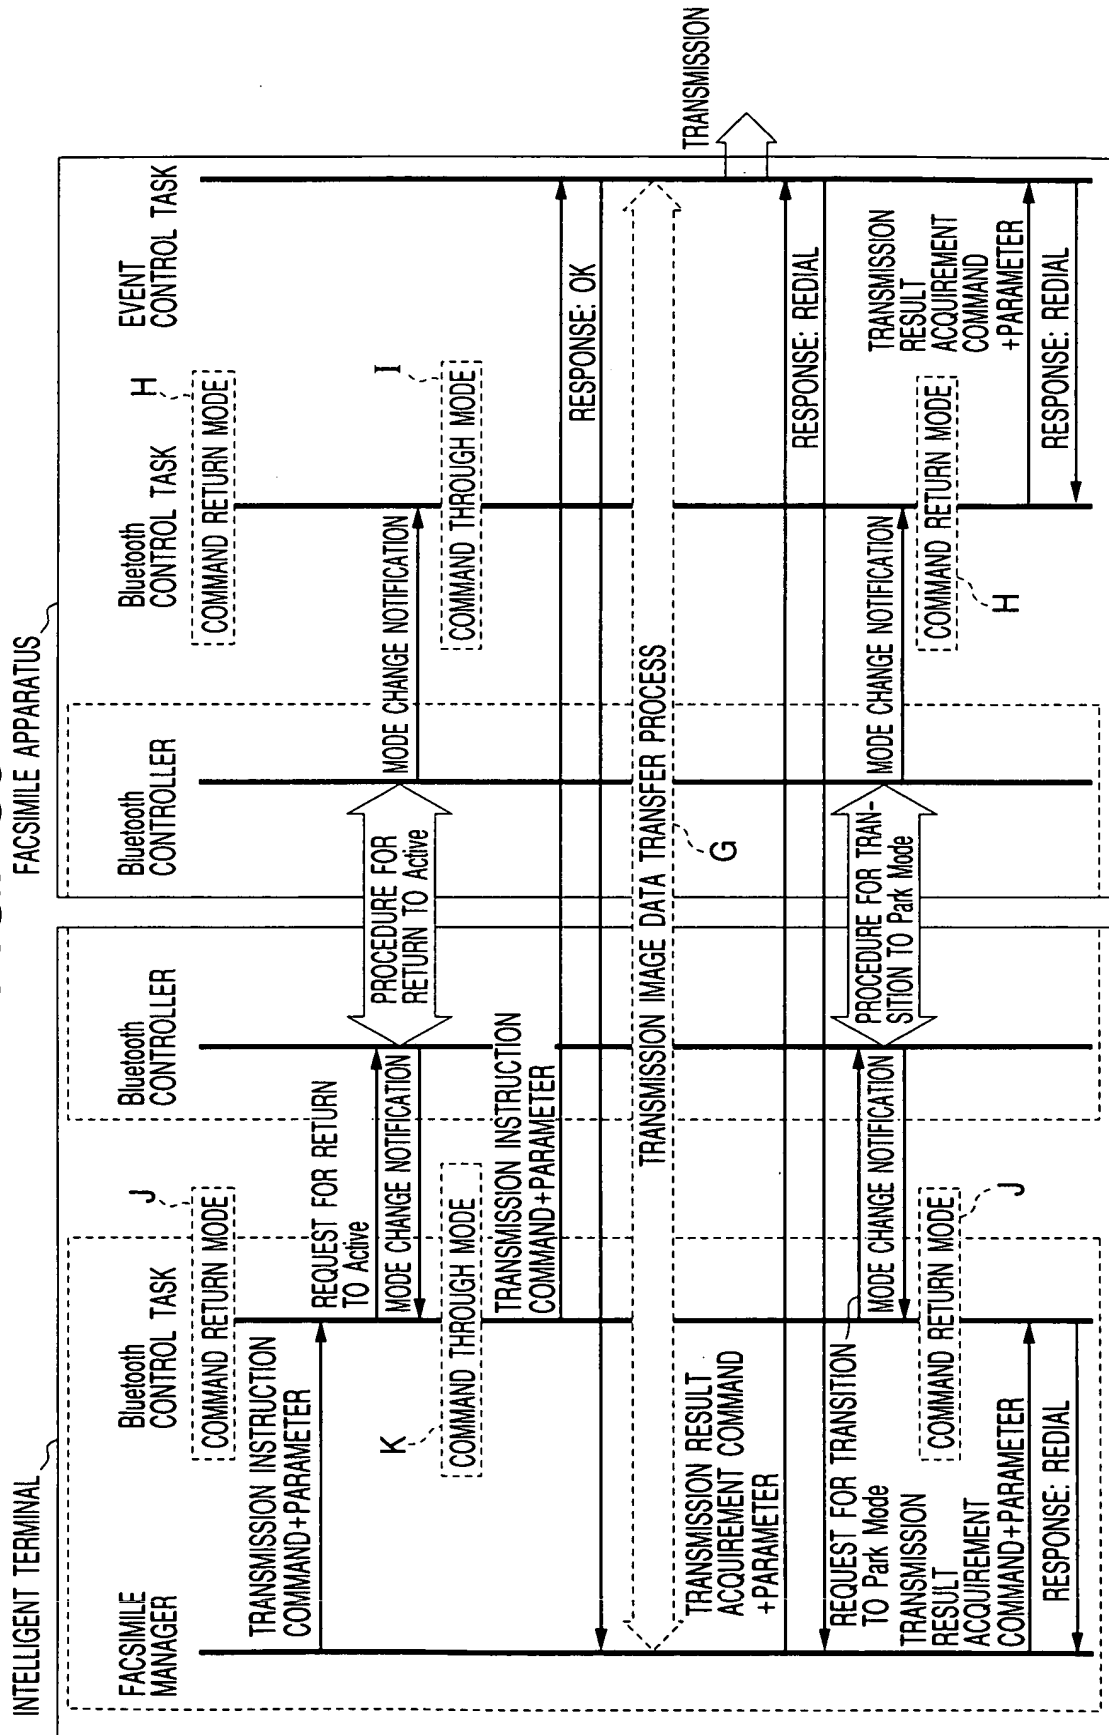


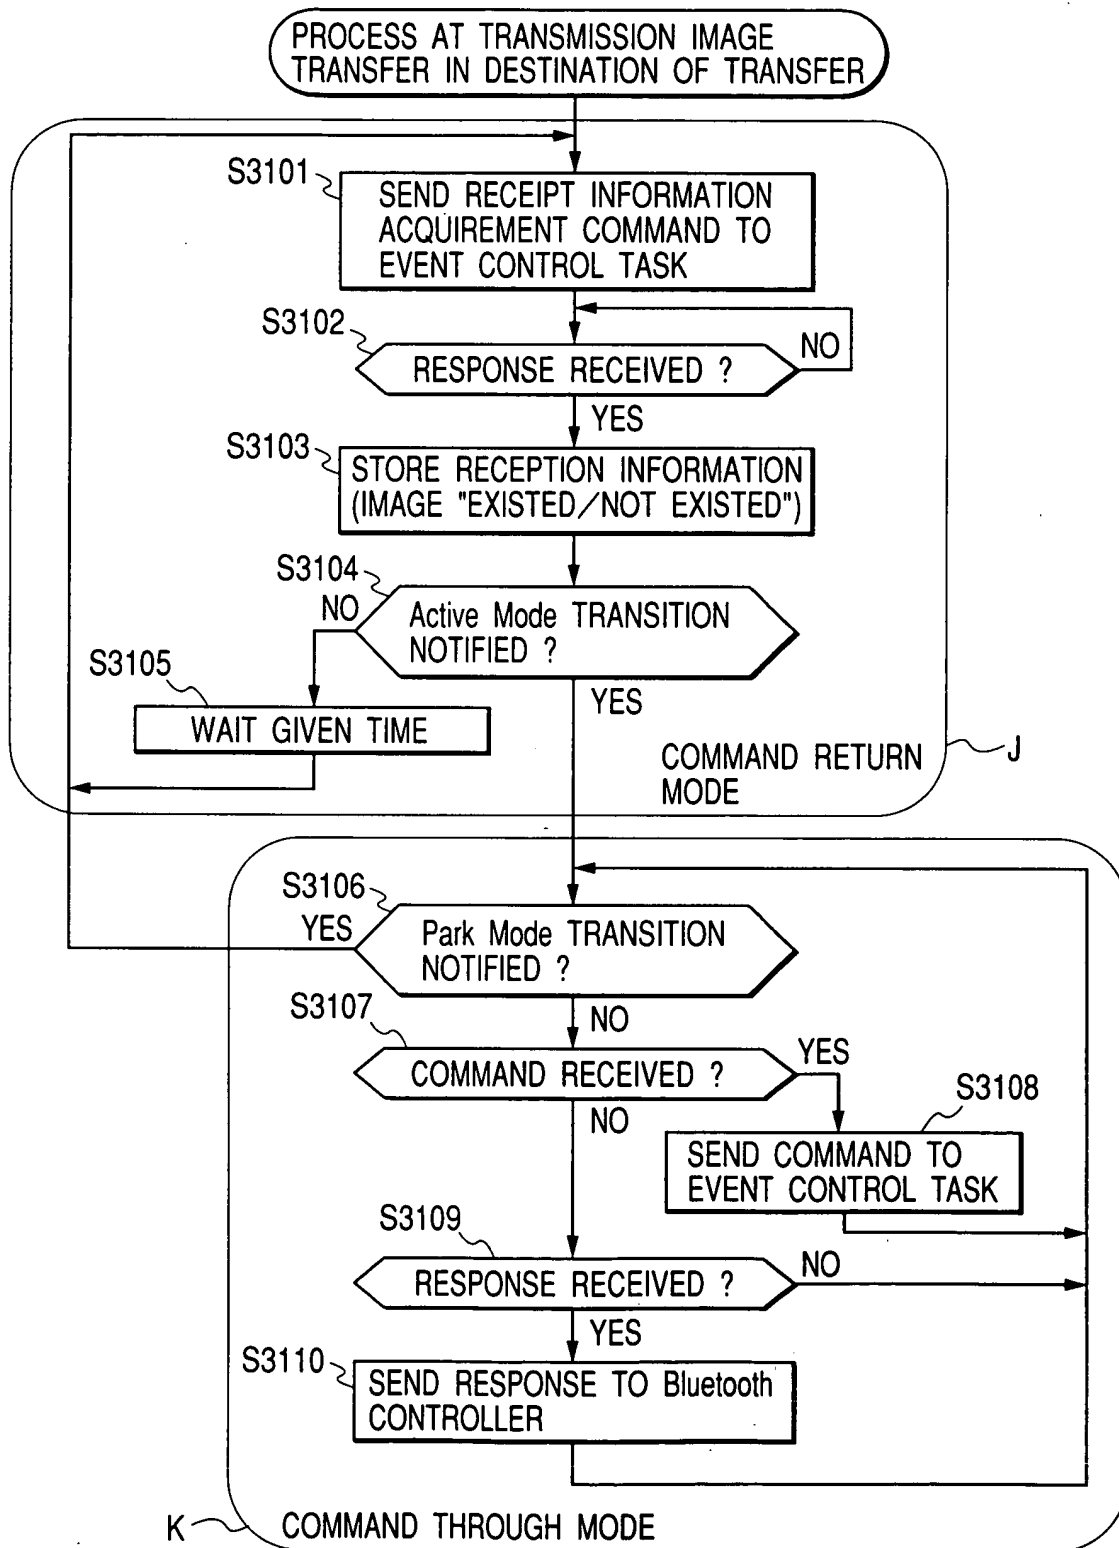
FIG. 31

FIG. 32

108: OPERATION UNIT

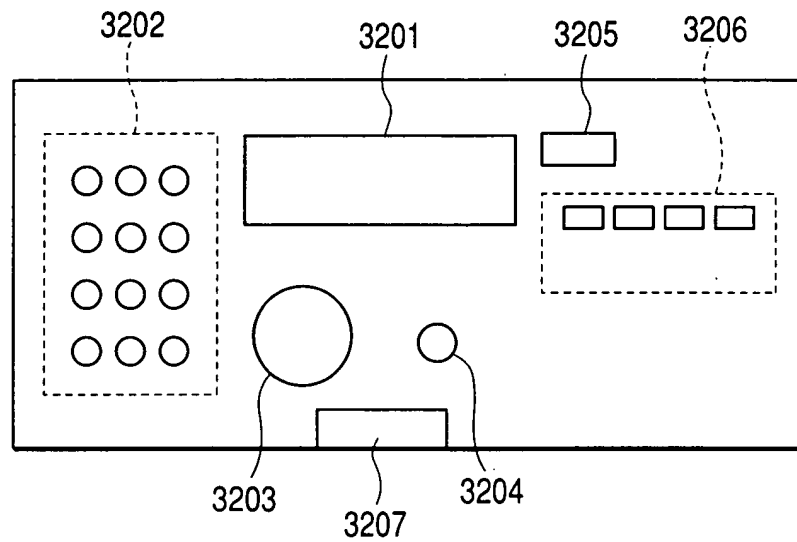


FIG. 33

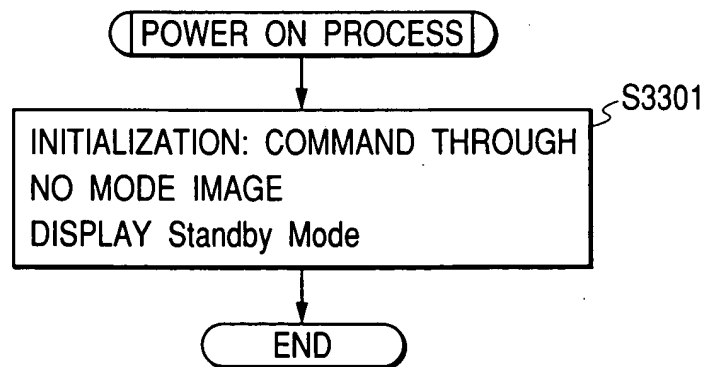


FIG. 34

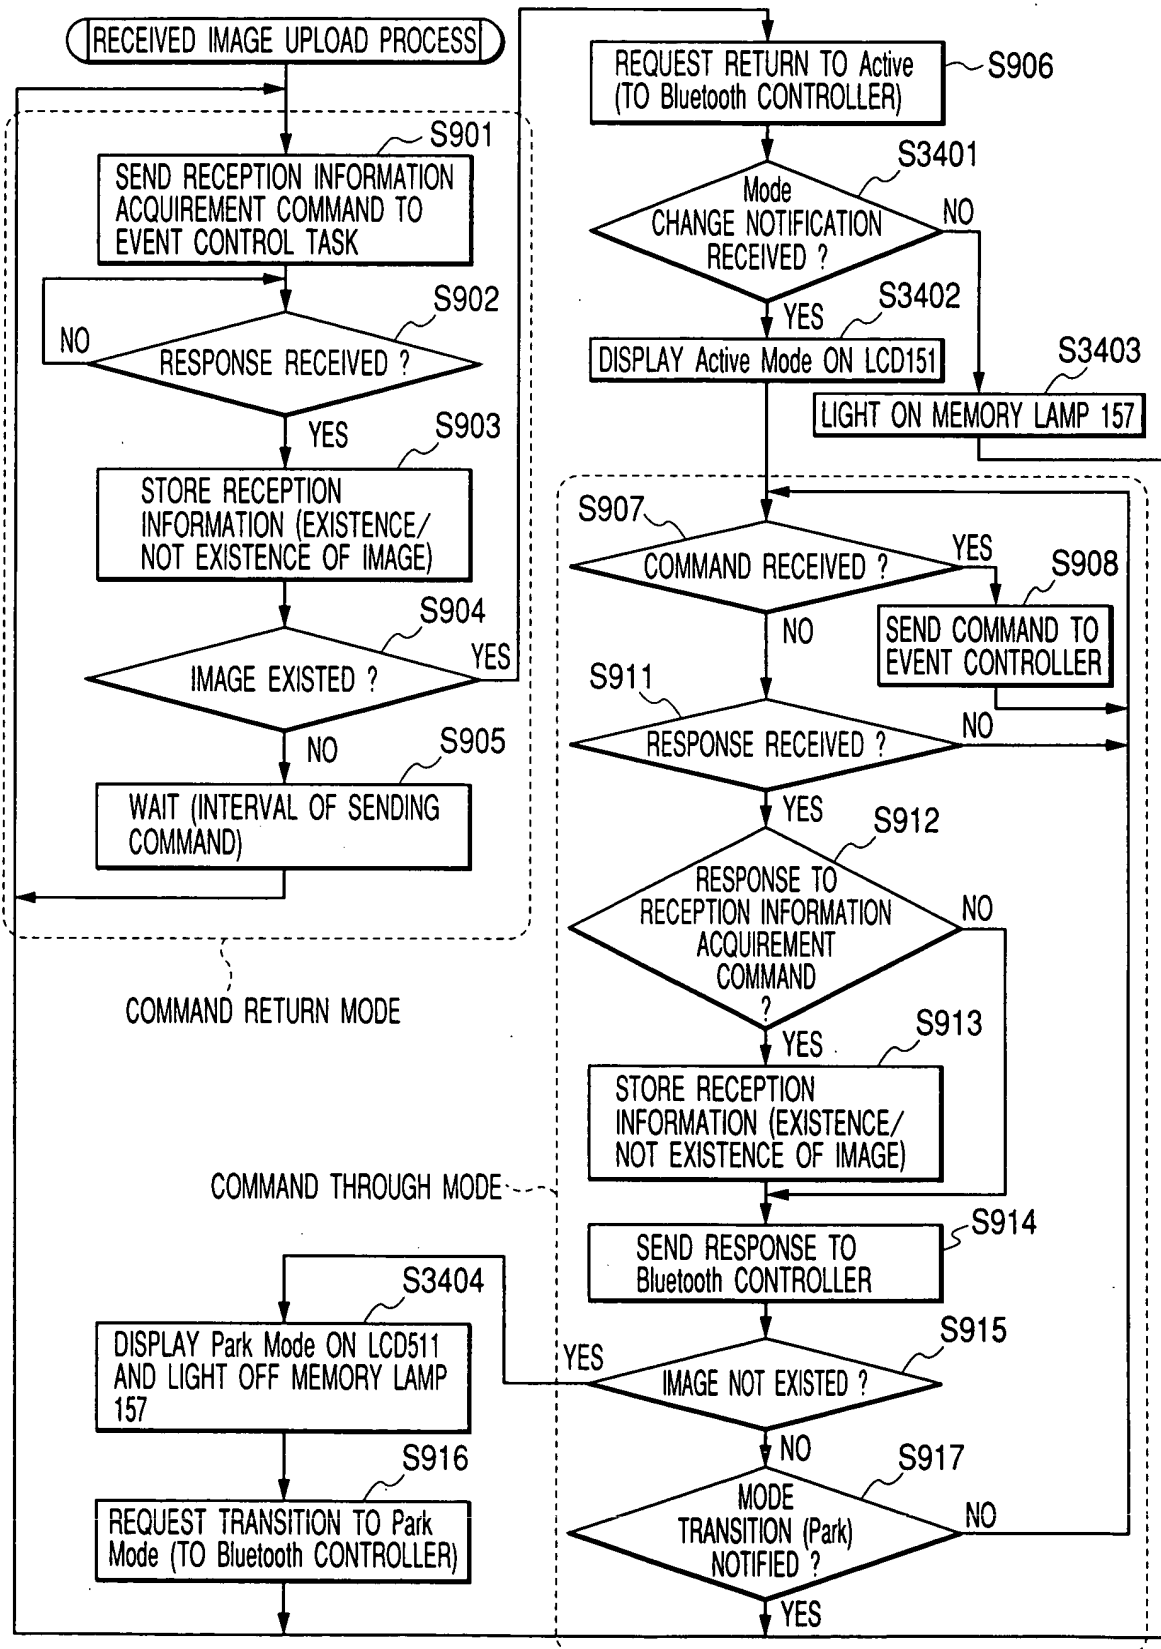


FIG. 35

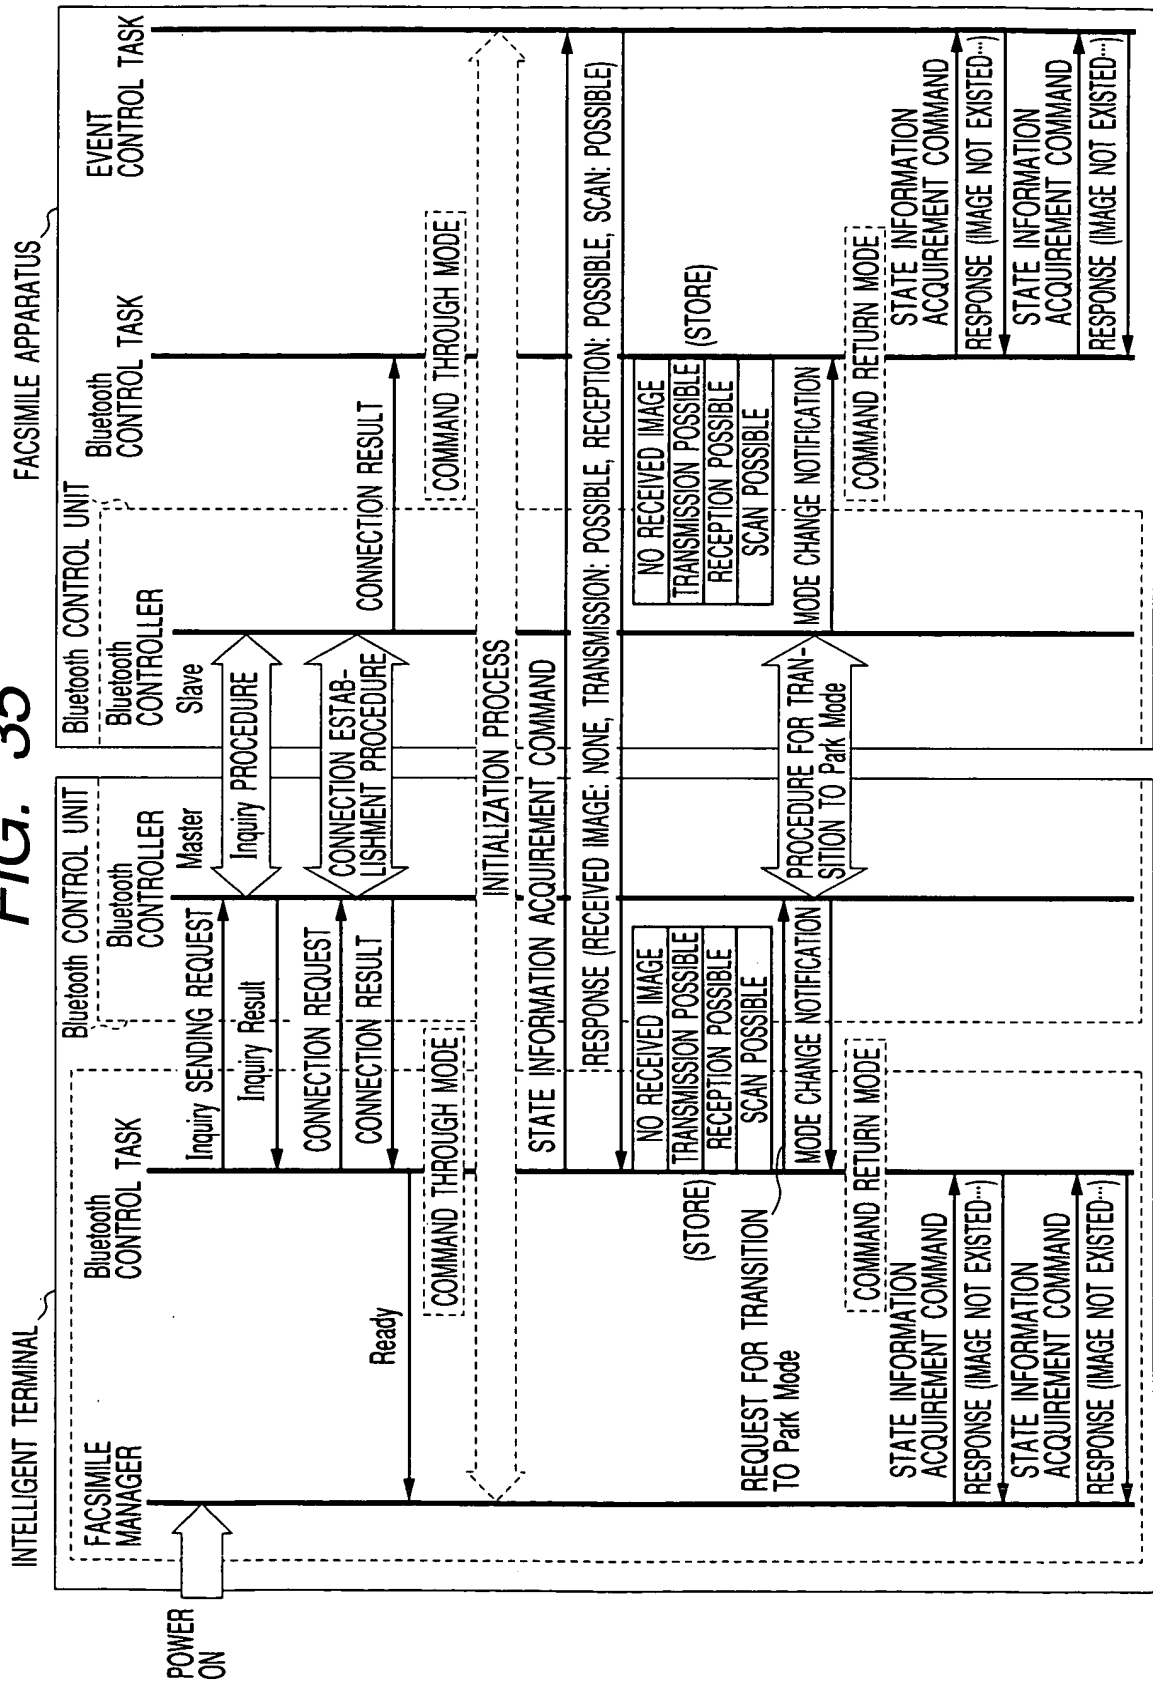


FIG. 36

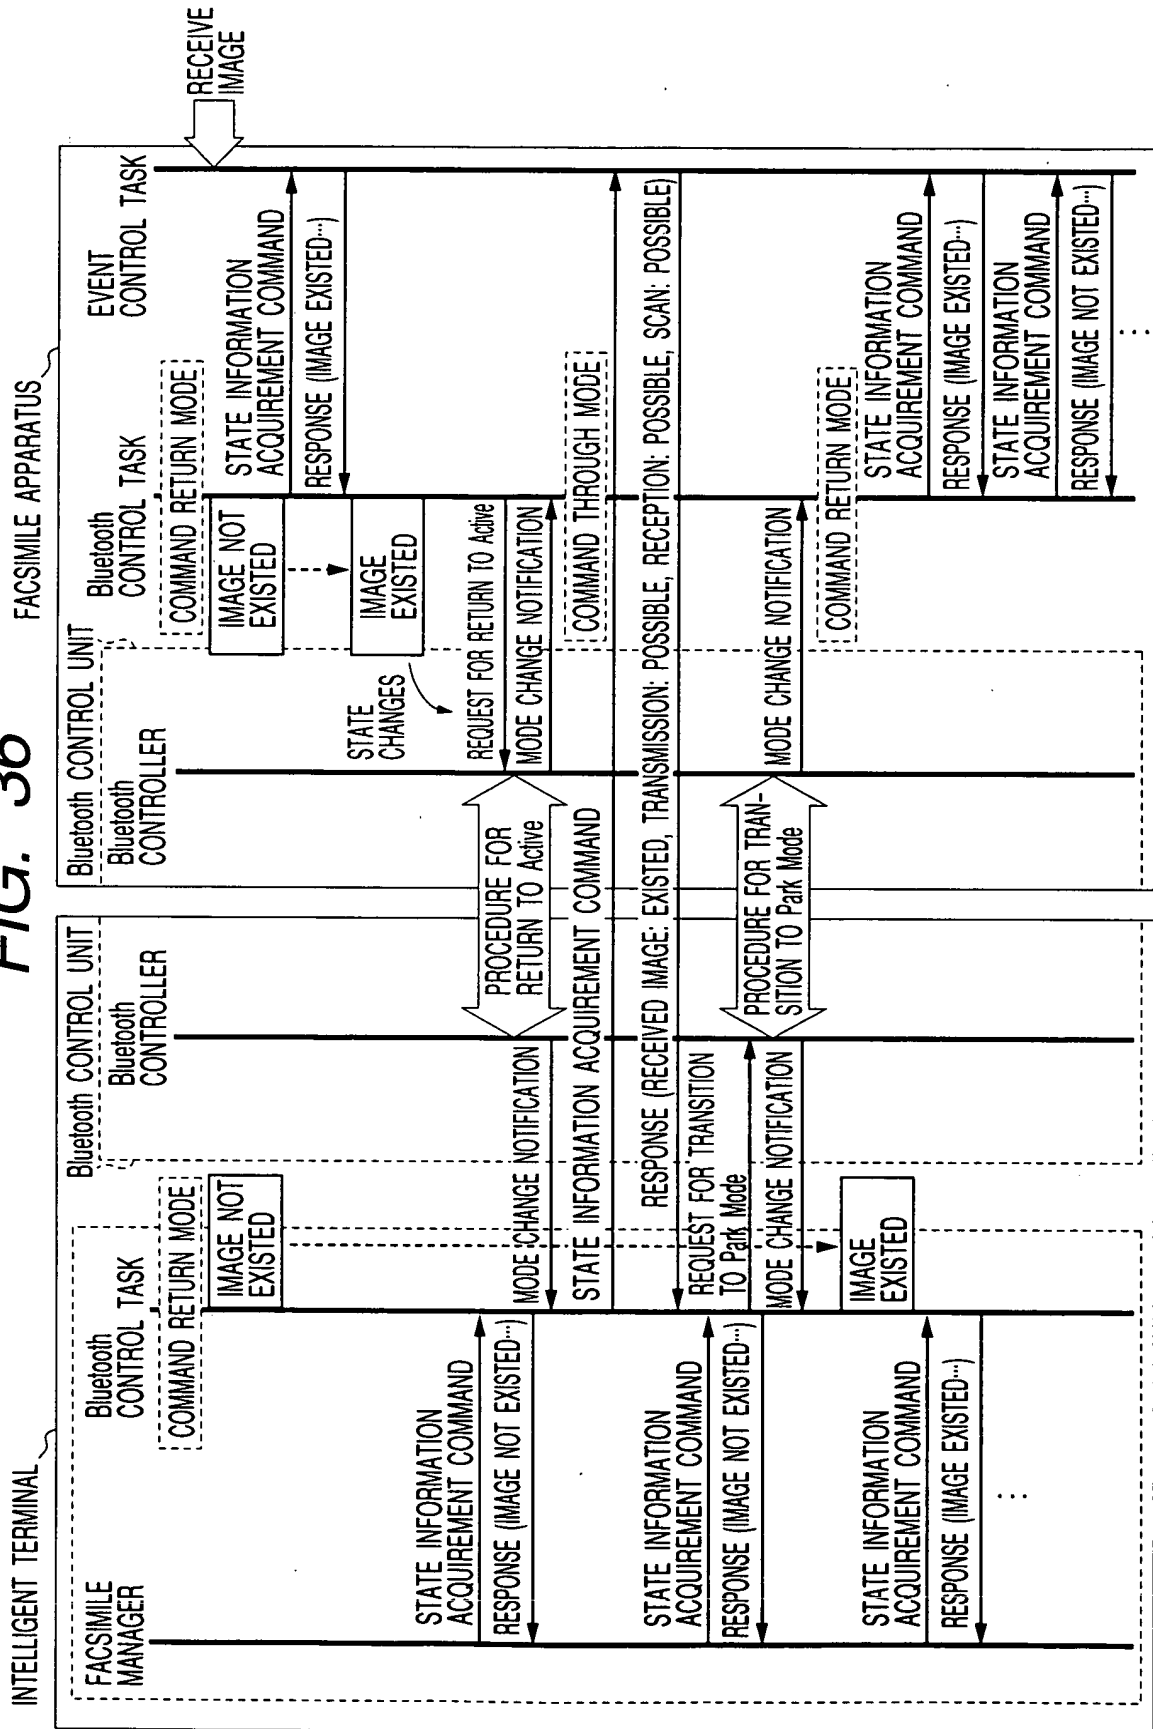


FIG. 37

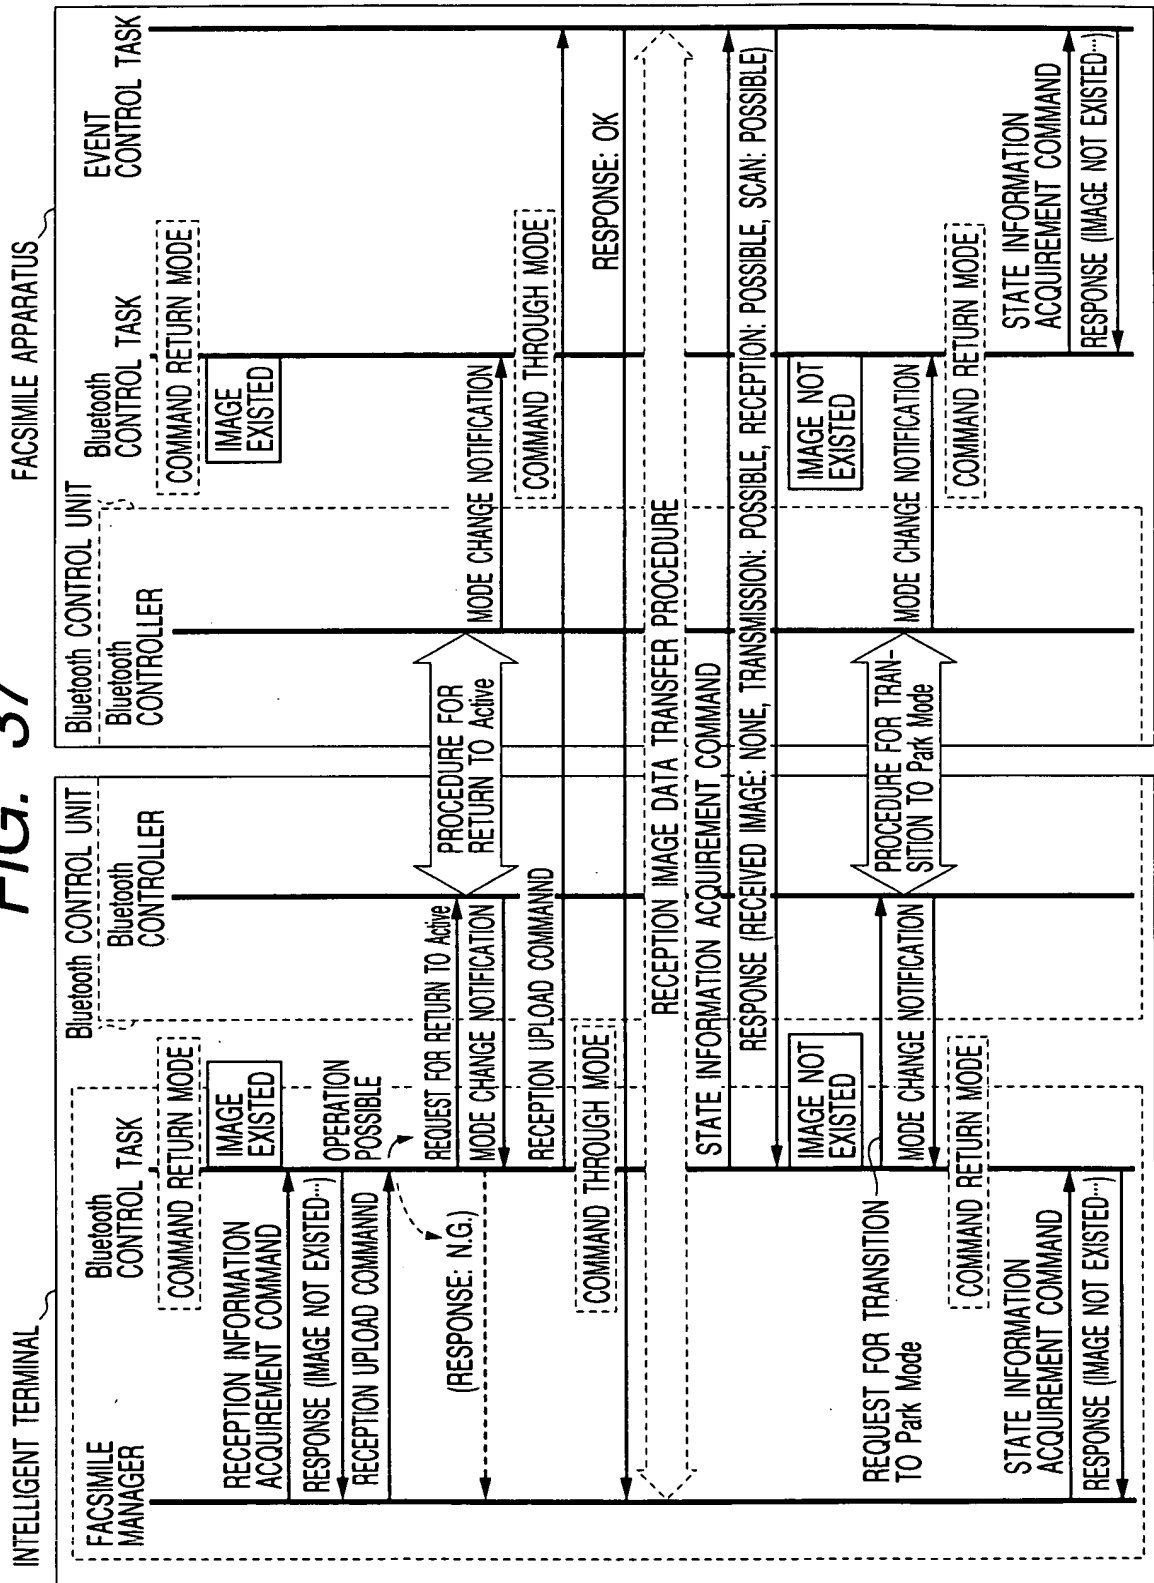


FIG. 39

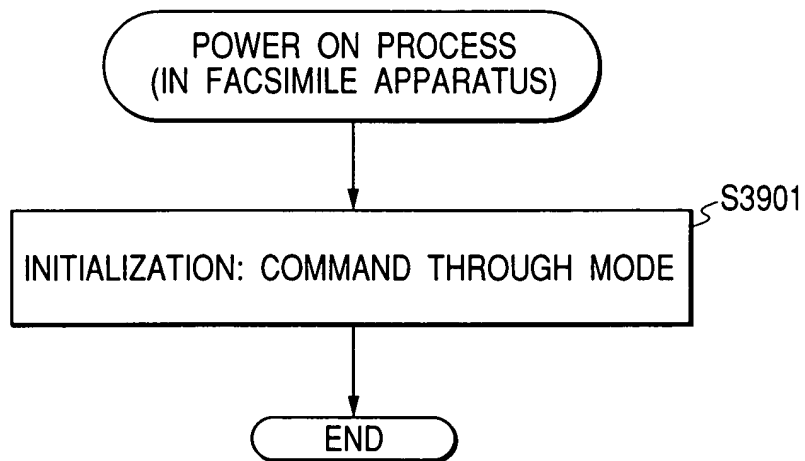


FIG. 40

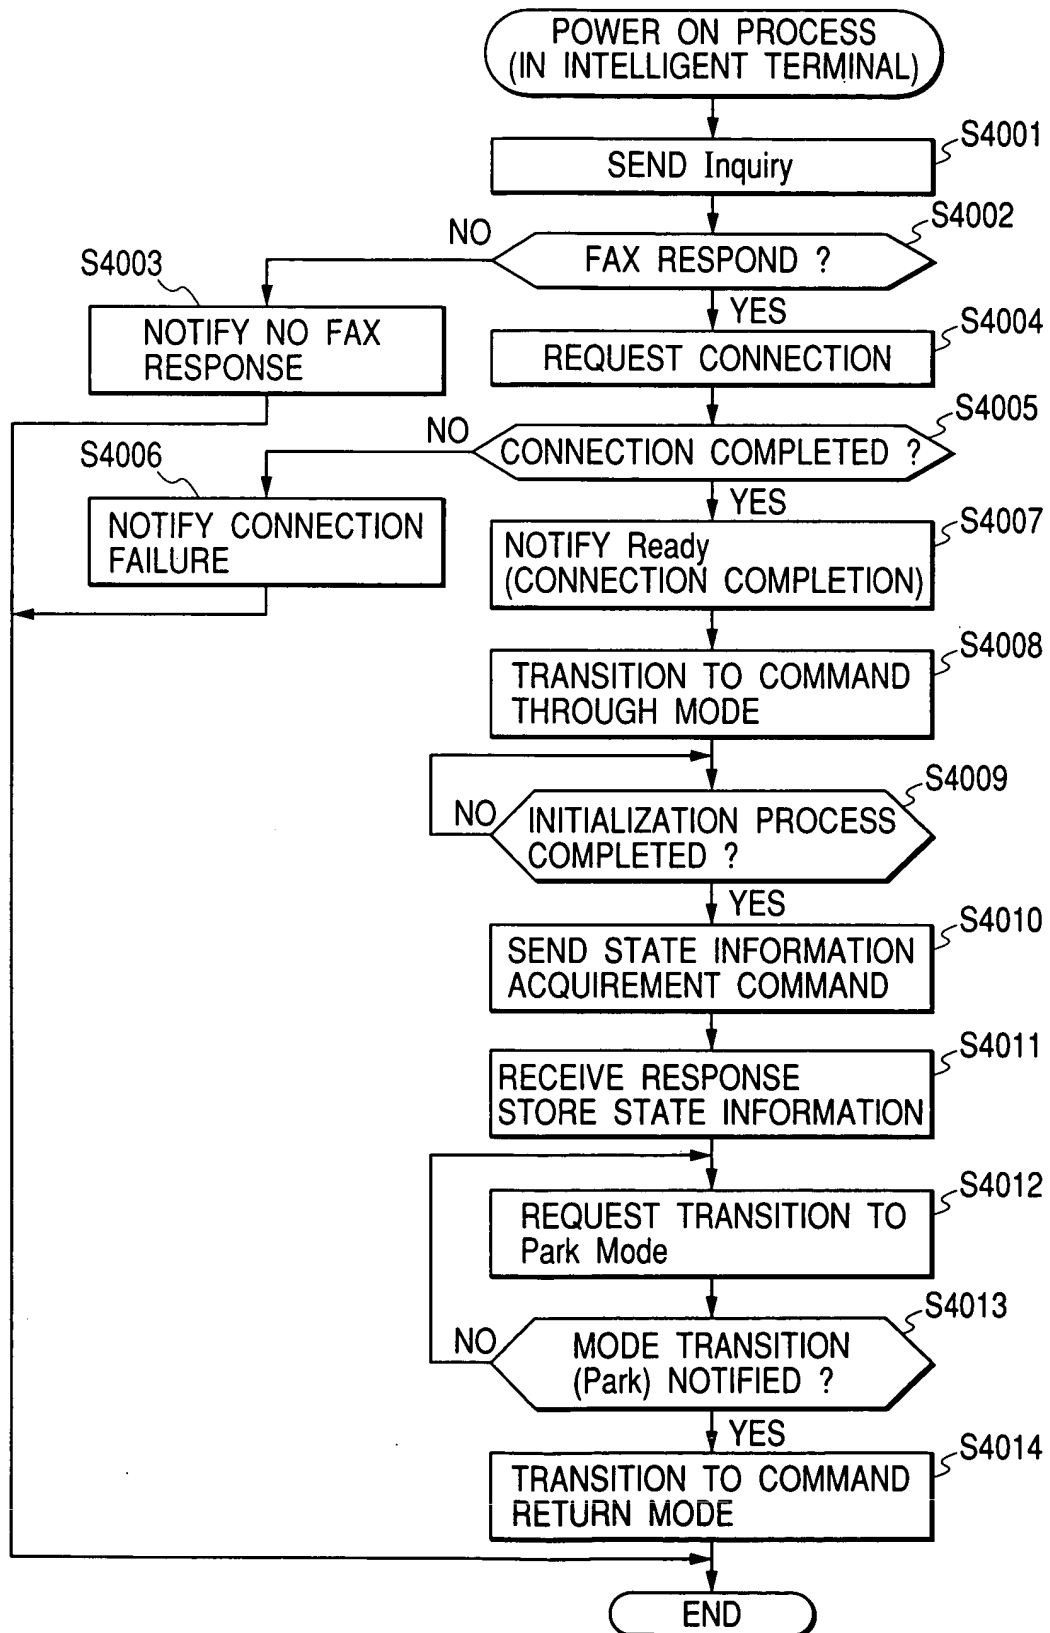


FIG. 41

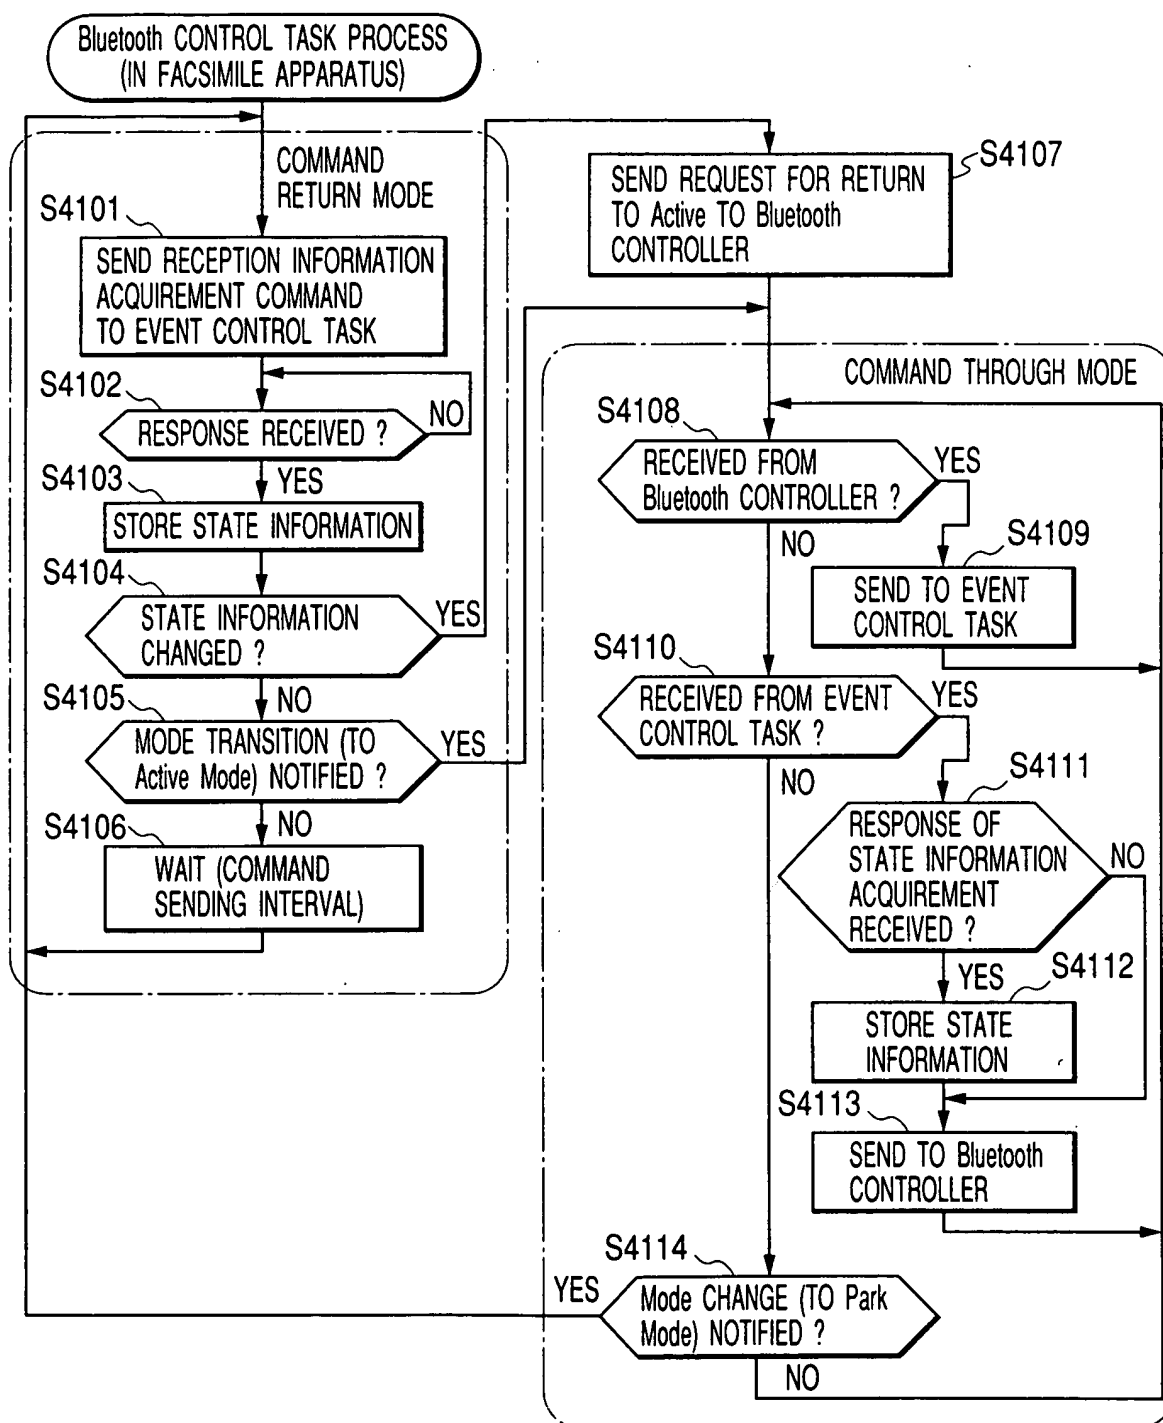


FIG. 42

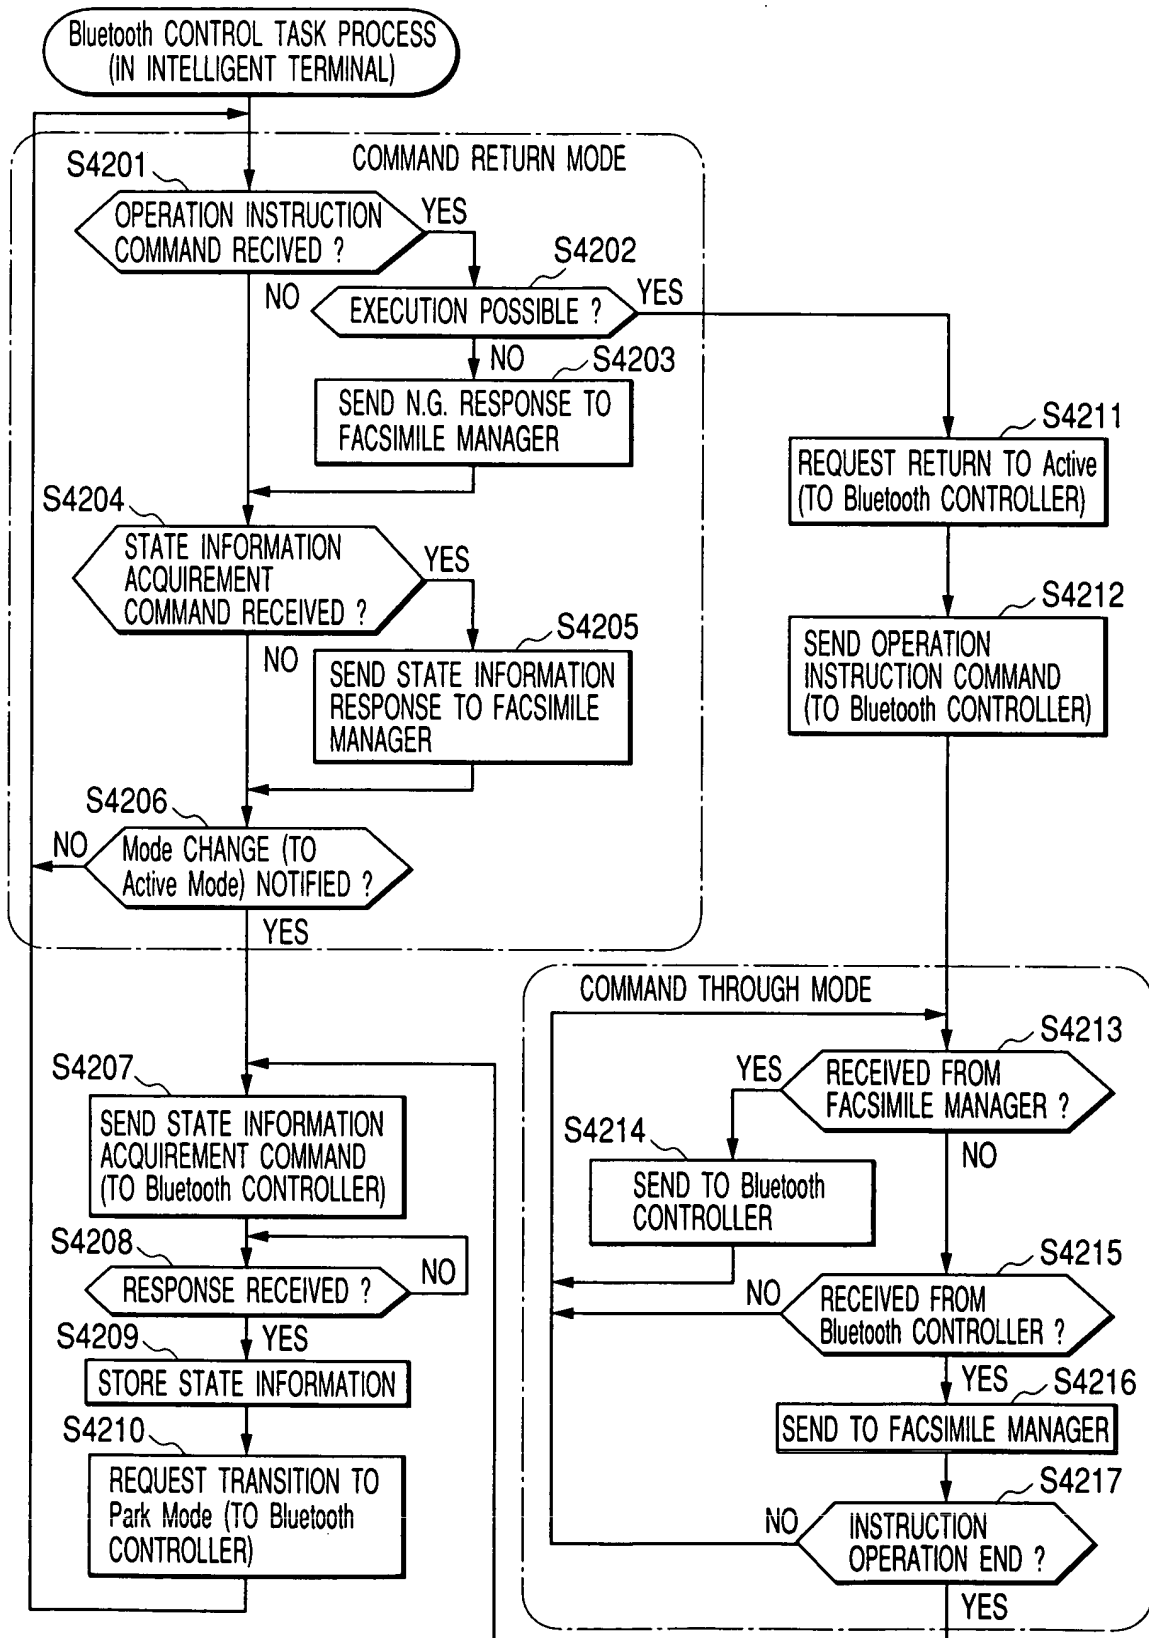


FIG. 43

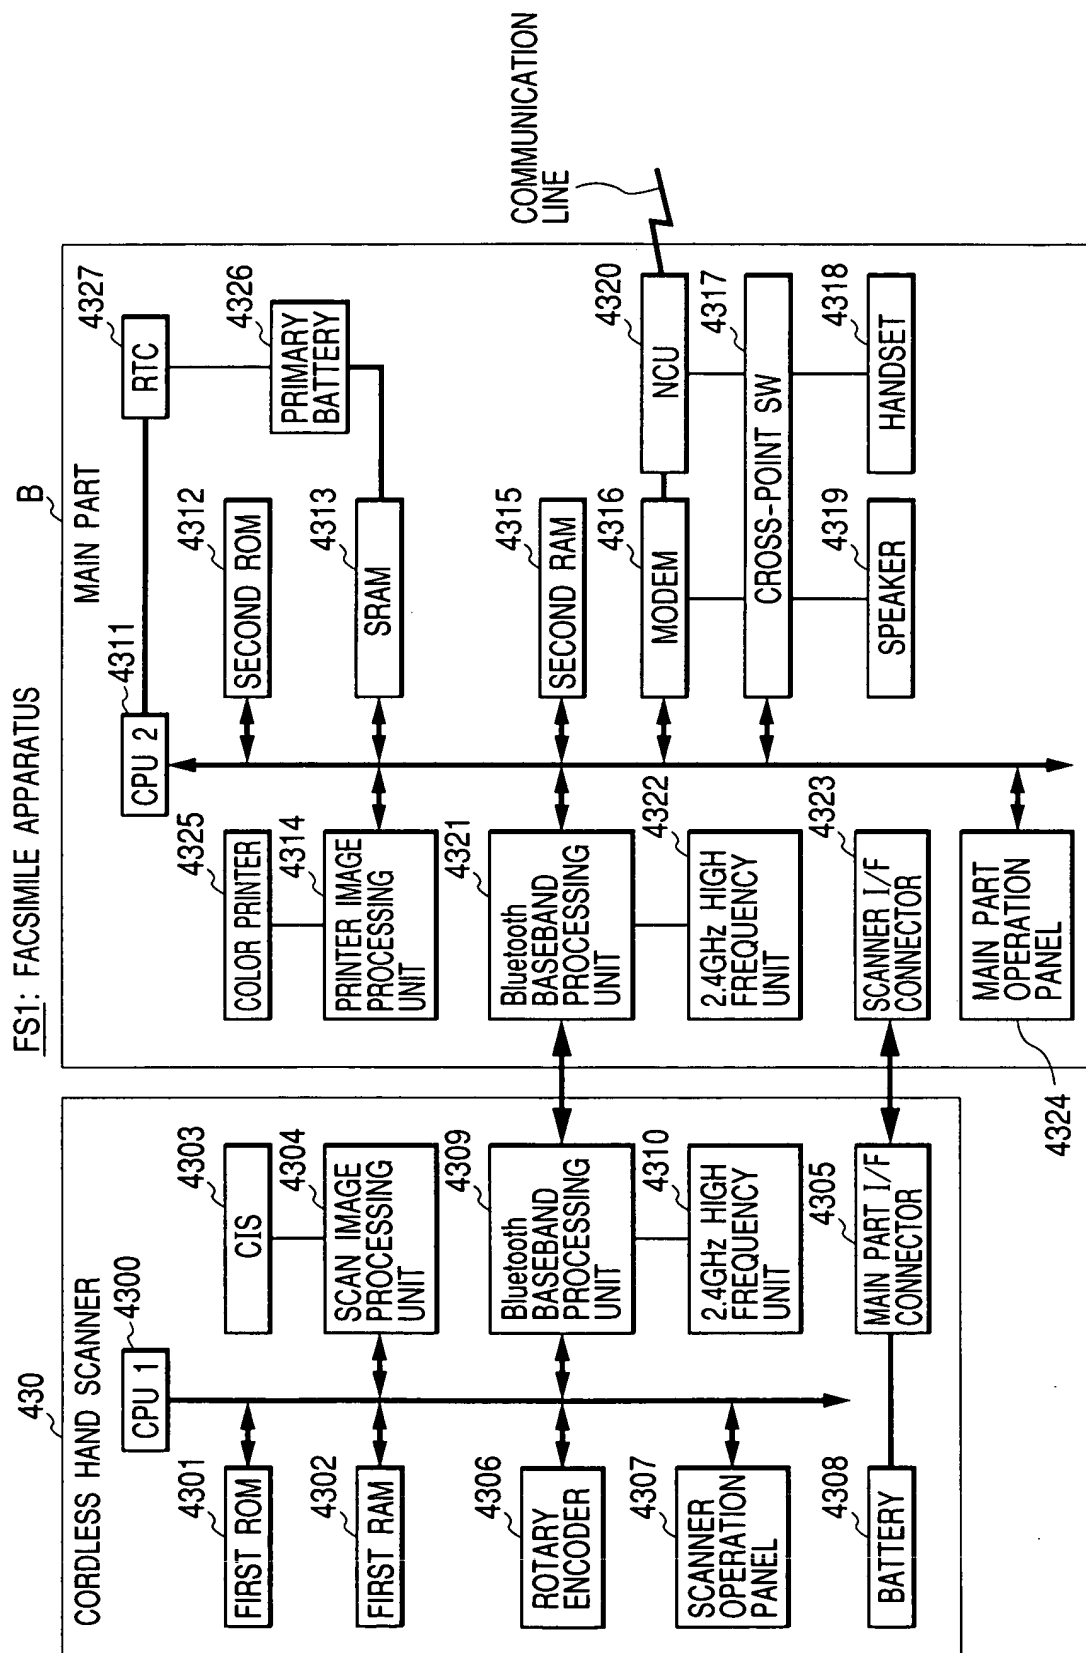


FIG. 44

FS1: FACSIMILE APPARATUS

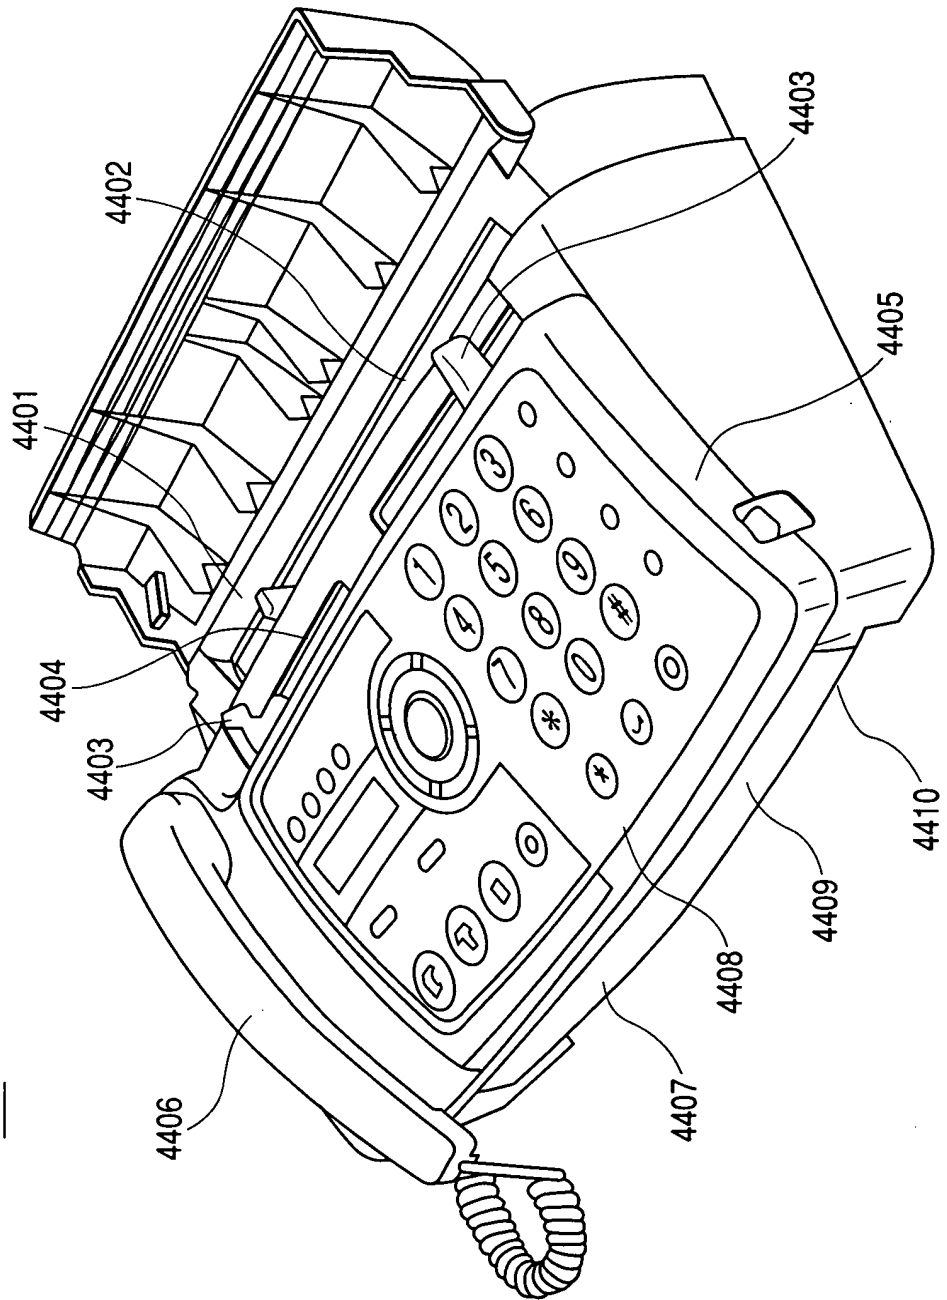


FIG. 45

4408: OPERATION PANEL IN MAIN PART

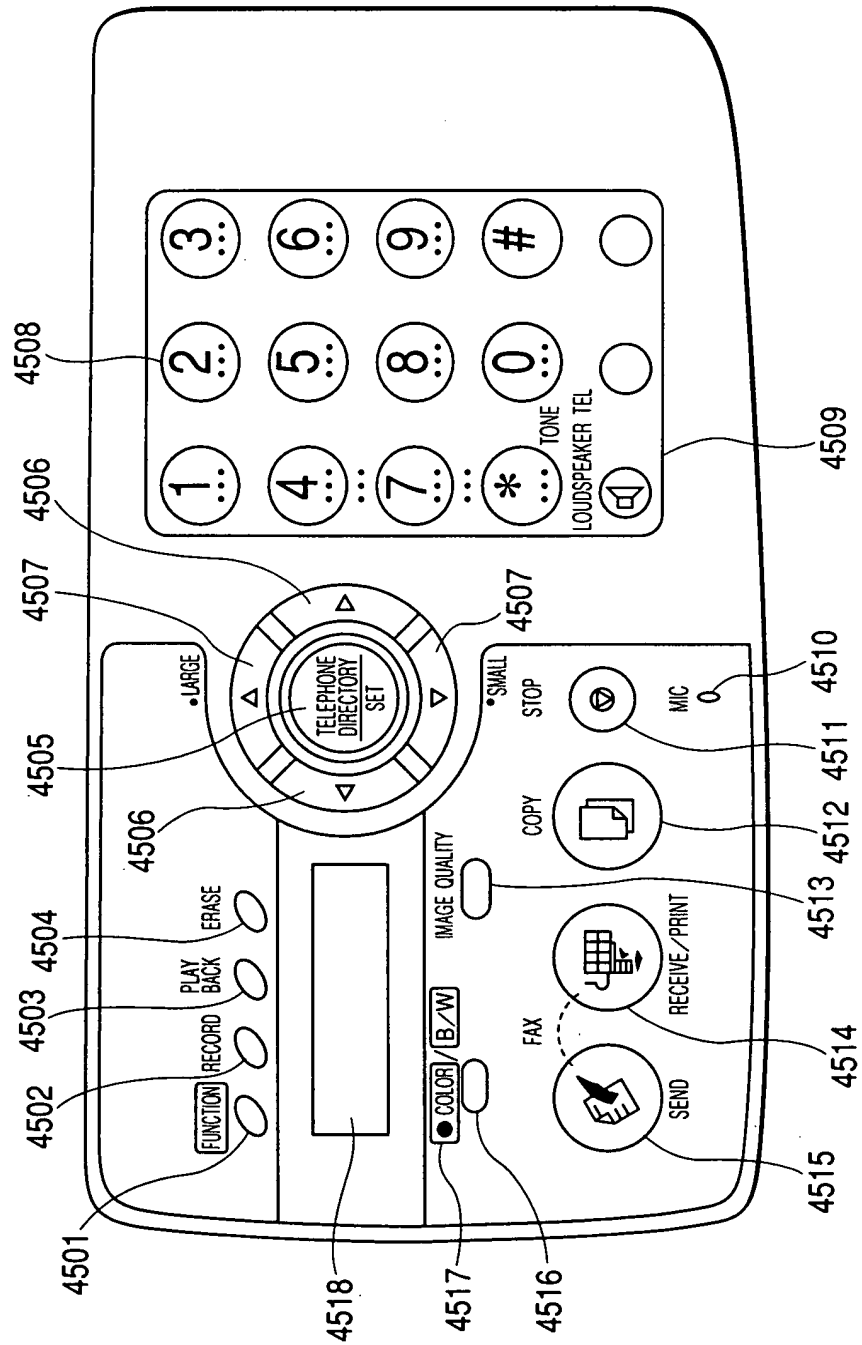


FIG. 46

430: CORDLESS HAND SCANNER

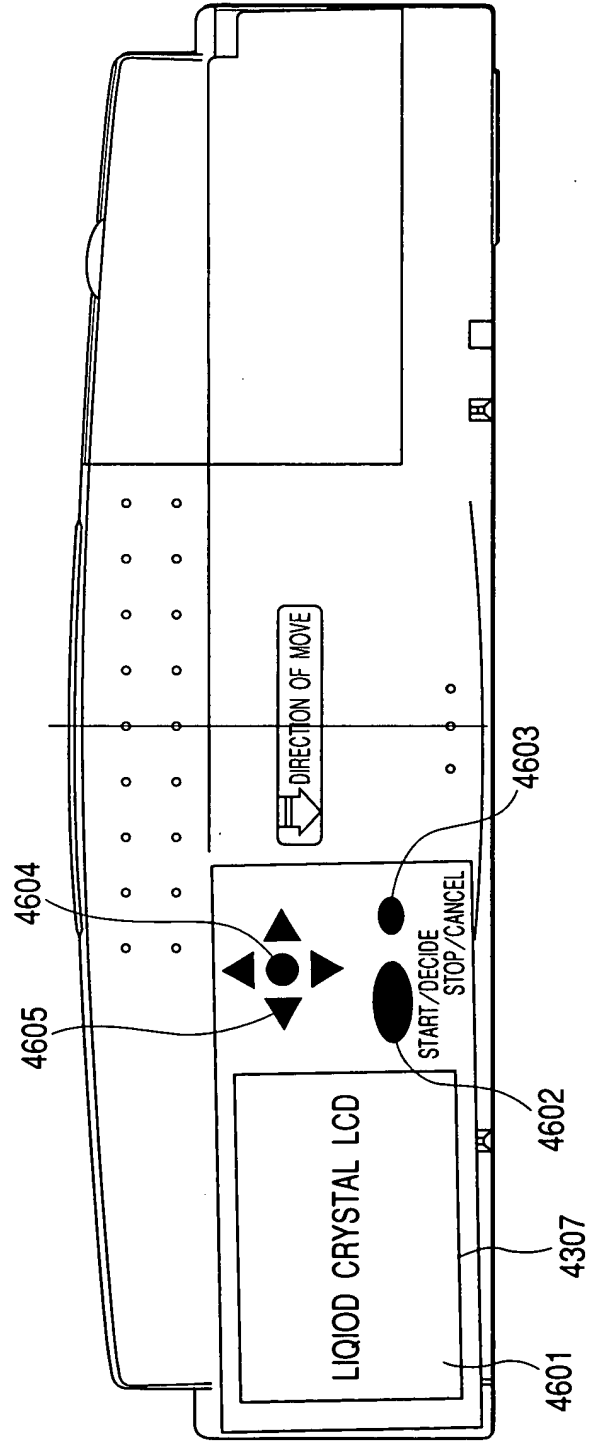


FIG. 47

470: CORDLESS HAND SCANNER

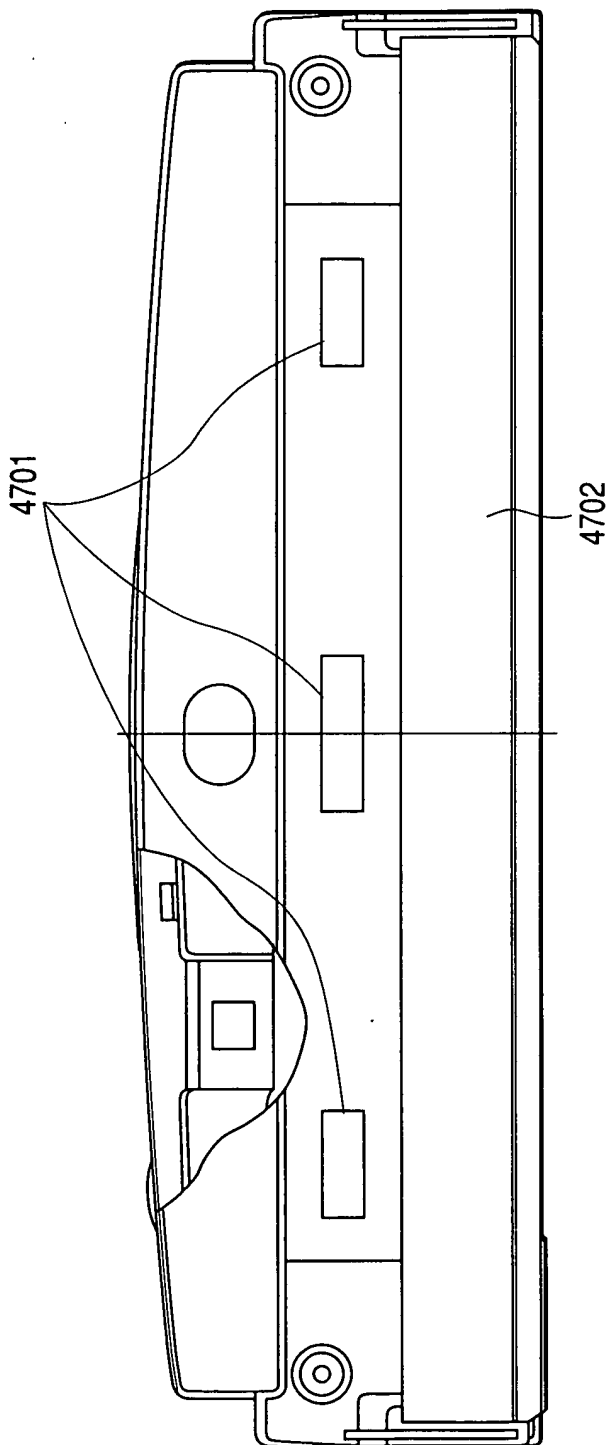


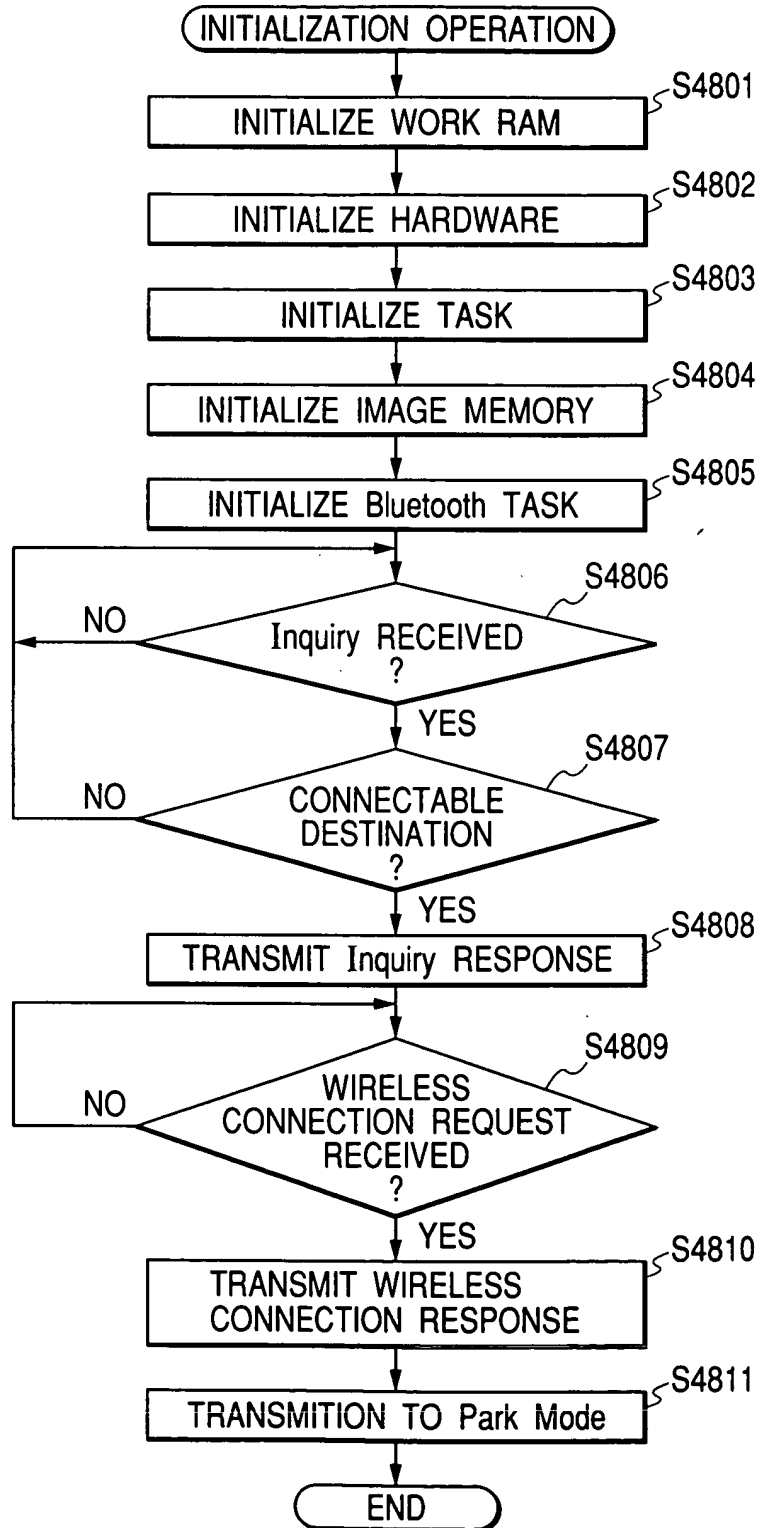
FIG. 48INITIALIZATION OPERATION OF HAND SCANNER 430

FIG. 49

OPERATION FOR TRANSITION OF HAND SCANNER 430 TO Park Mode
OF HAND SCANNER 430

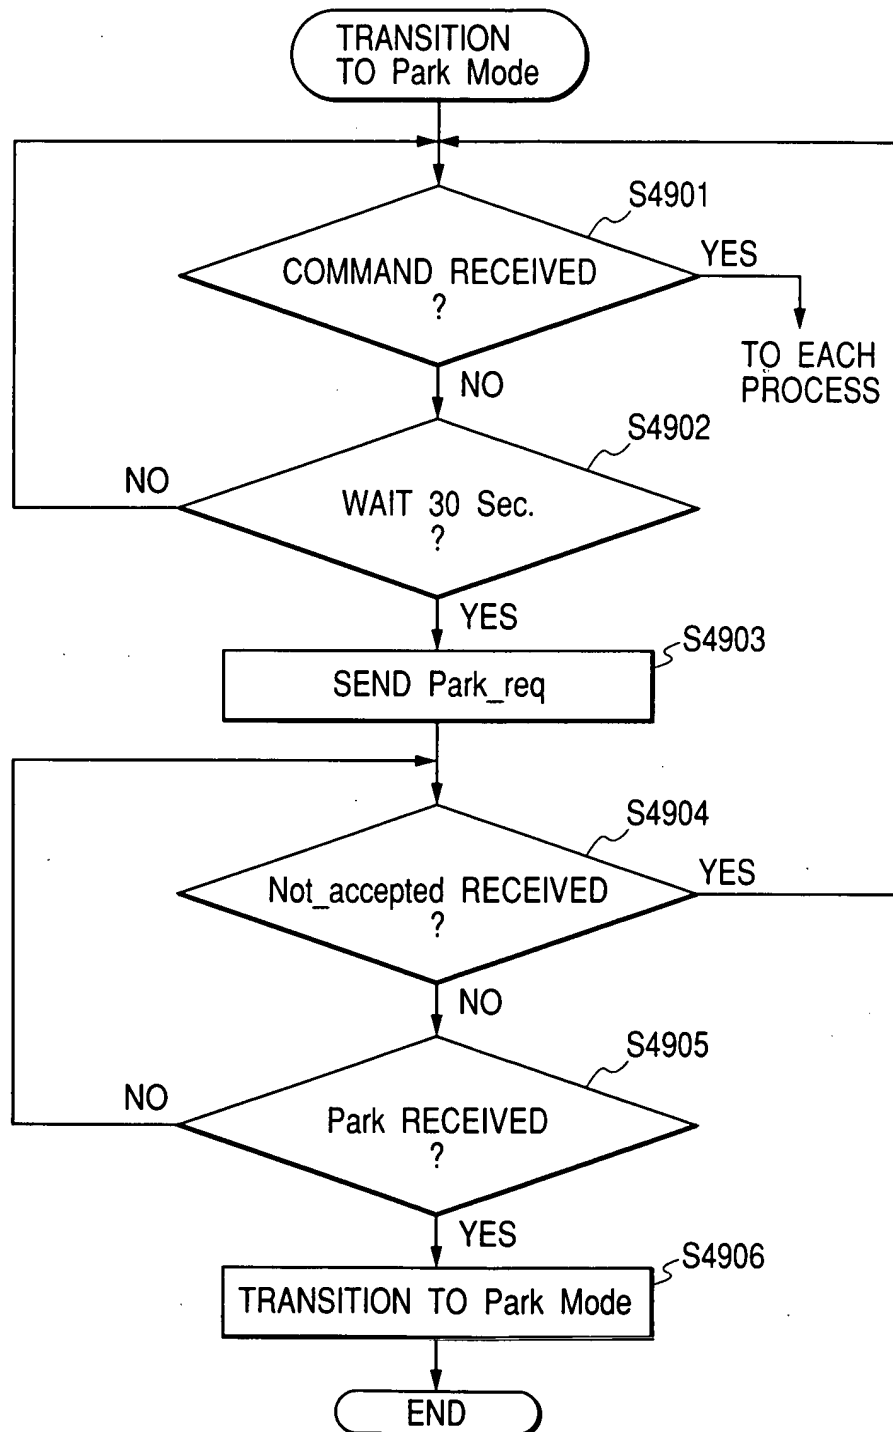


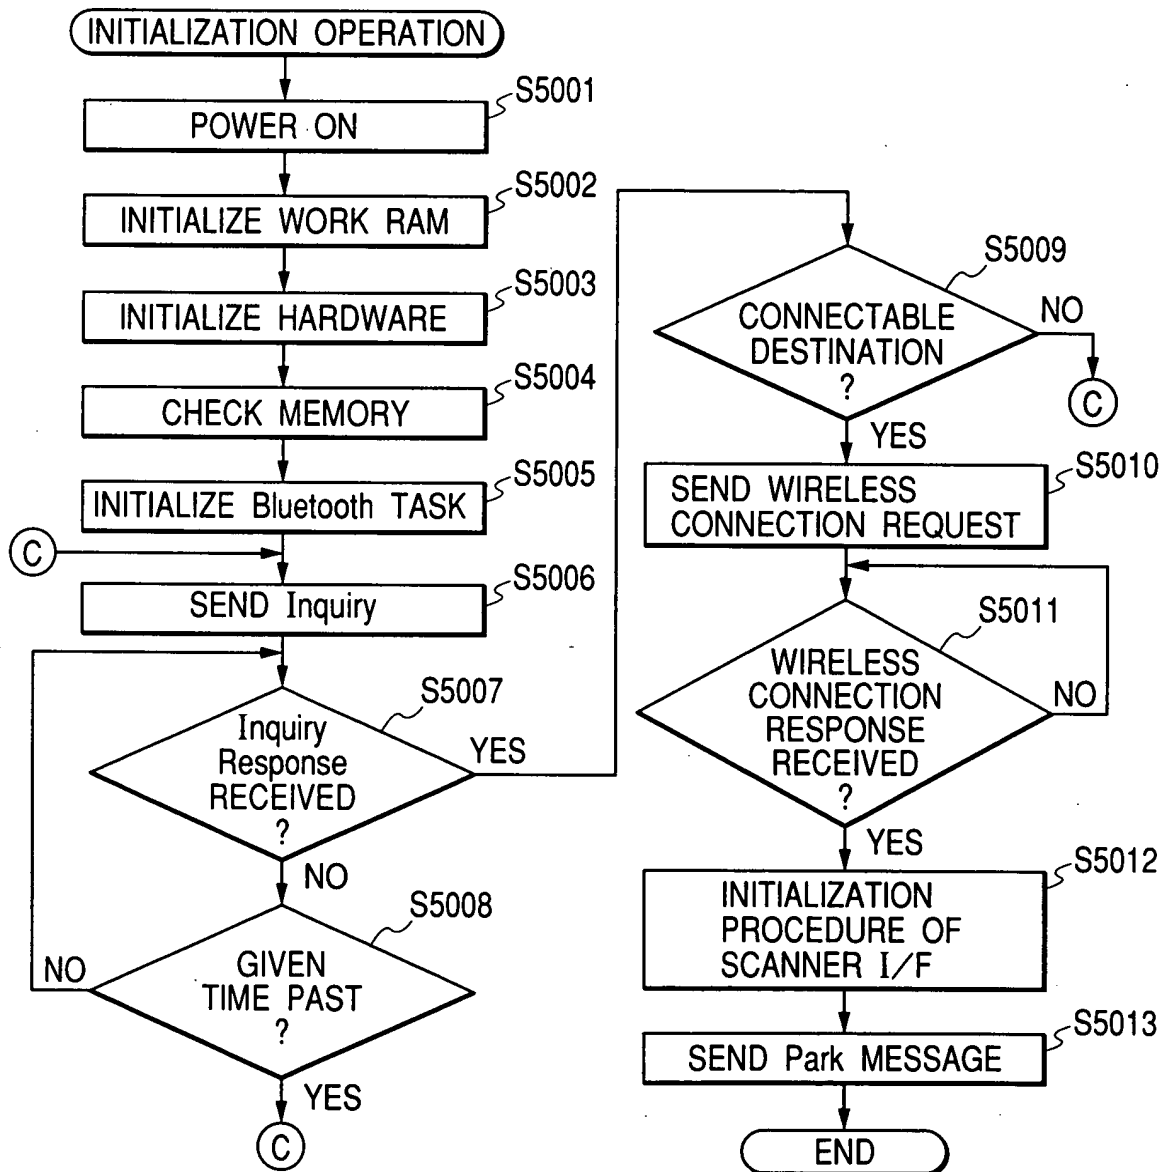
FIG. 50INITIALIZATION OPERATION OF MAIN PART B

FIG. 51

PACKET

PACKET

| | | |
|----------------------|-----------------|-------------------------|
| ACCESS CODE 72bit | HEADER 54bit | PAYLOAD 0 TO 2745bit |
|----------------------|-----------------|-------------------------|

PAYLOAD

(DATA EXISTED)

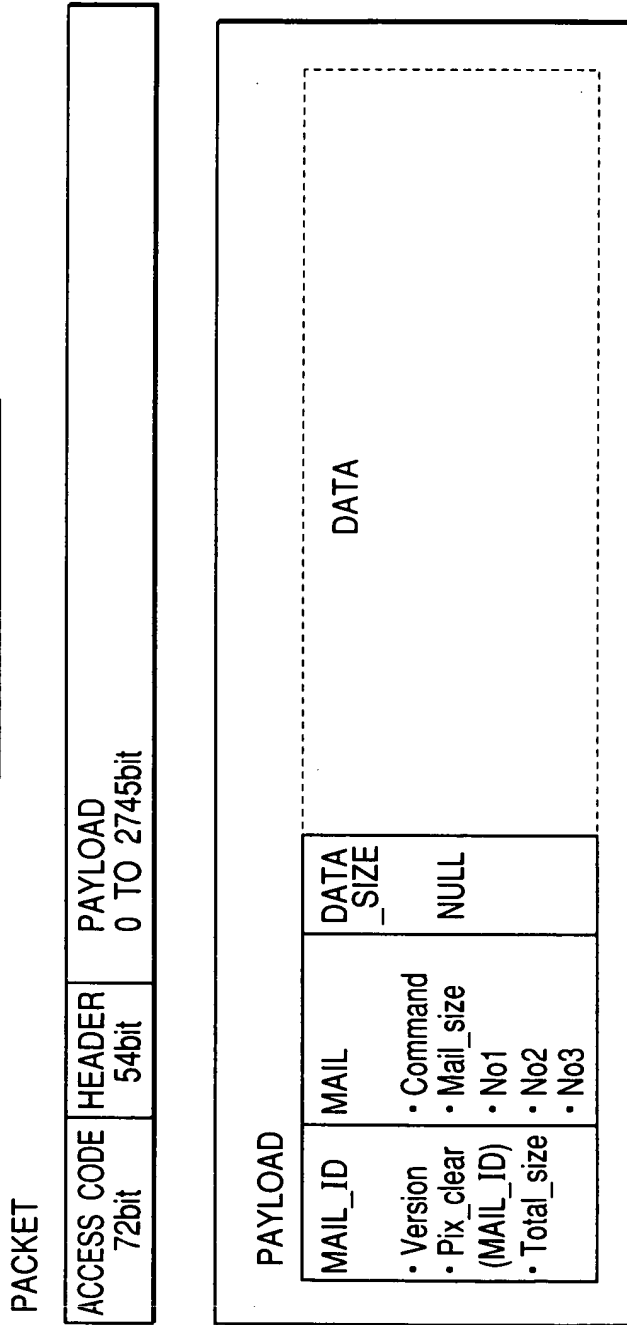
| | | | |
|---------|------|-----------|------|
| MAIL_ID | MAIL | DATA_SIZE | DATA |
|---------|------|-----------|------|

(DATA NOT EXISTED)

| | | | |
|---------|------|-----------|------|
| MAIL_ID | MAIL | DATA_SIZE | DATA |
|---------|------|-----------|------|

FIG. 52

EXAMPLE OF PACKET (1)



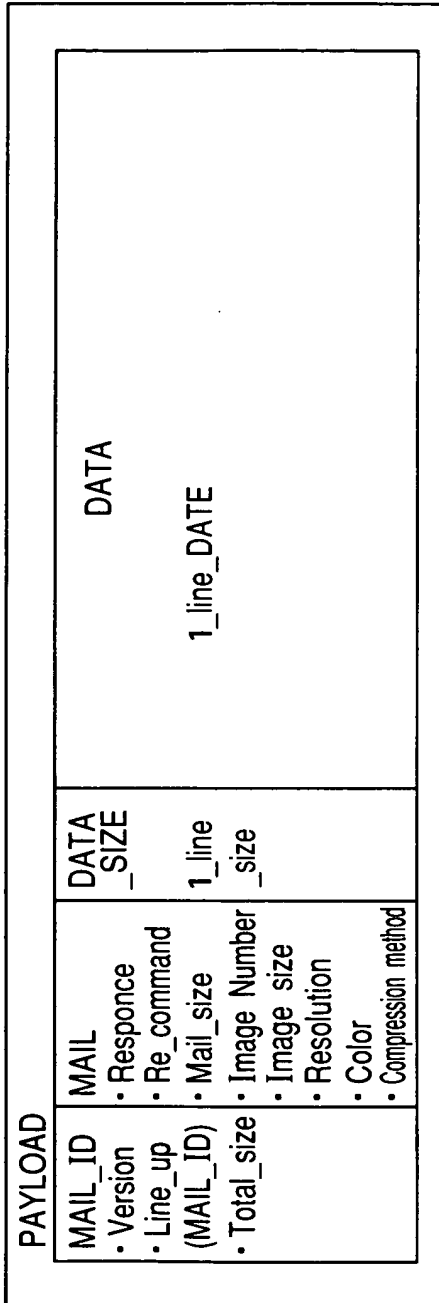
- Version is a management version of an interface command/response
- Pix_clear is MAIL_ID for an image deletion
- Total_size is a total size of payload portion
- Command indicates a request command
- Mail_size is an information size included in MAIL
- No.1, No.2 and No.3 are management number of image to be cancelled which is specified by the operation in main part
- NULL is zero. In this example, DATA portion is zero since the image data etc. is not included.

FIG. 53

EXAMPLE OF PACKET (2)

PACKET

| ACCESS CODE 72bit | HEADER 54bit | PAYLOAD 0 TO 2745bit |
|----------------------|-----------------|-------------------------|
|----------------------|-----------------|-------------------------|



- Version is a management version of an interface command/response
- Line_up is a MAIL_ID for an image data upload
- Total_size is a total size of payload portion
- Responce indicates a response which lightens on the basis of the request command
- Re_command is an instruction to the main part in a case where there are some operation instructions or error on the hand scanner (for example, STOP, CANCEL, REPLAY, PAUSE, NULL, etc.)
- Mail_size is an information size included in MAIL
- Image number/image size/resolution/color/compression method indicate information of the image to be transferred
- 1_Line_size is a data size of 1 line of the read image
- 1_Line_data is a data of 1 line of the read image

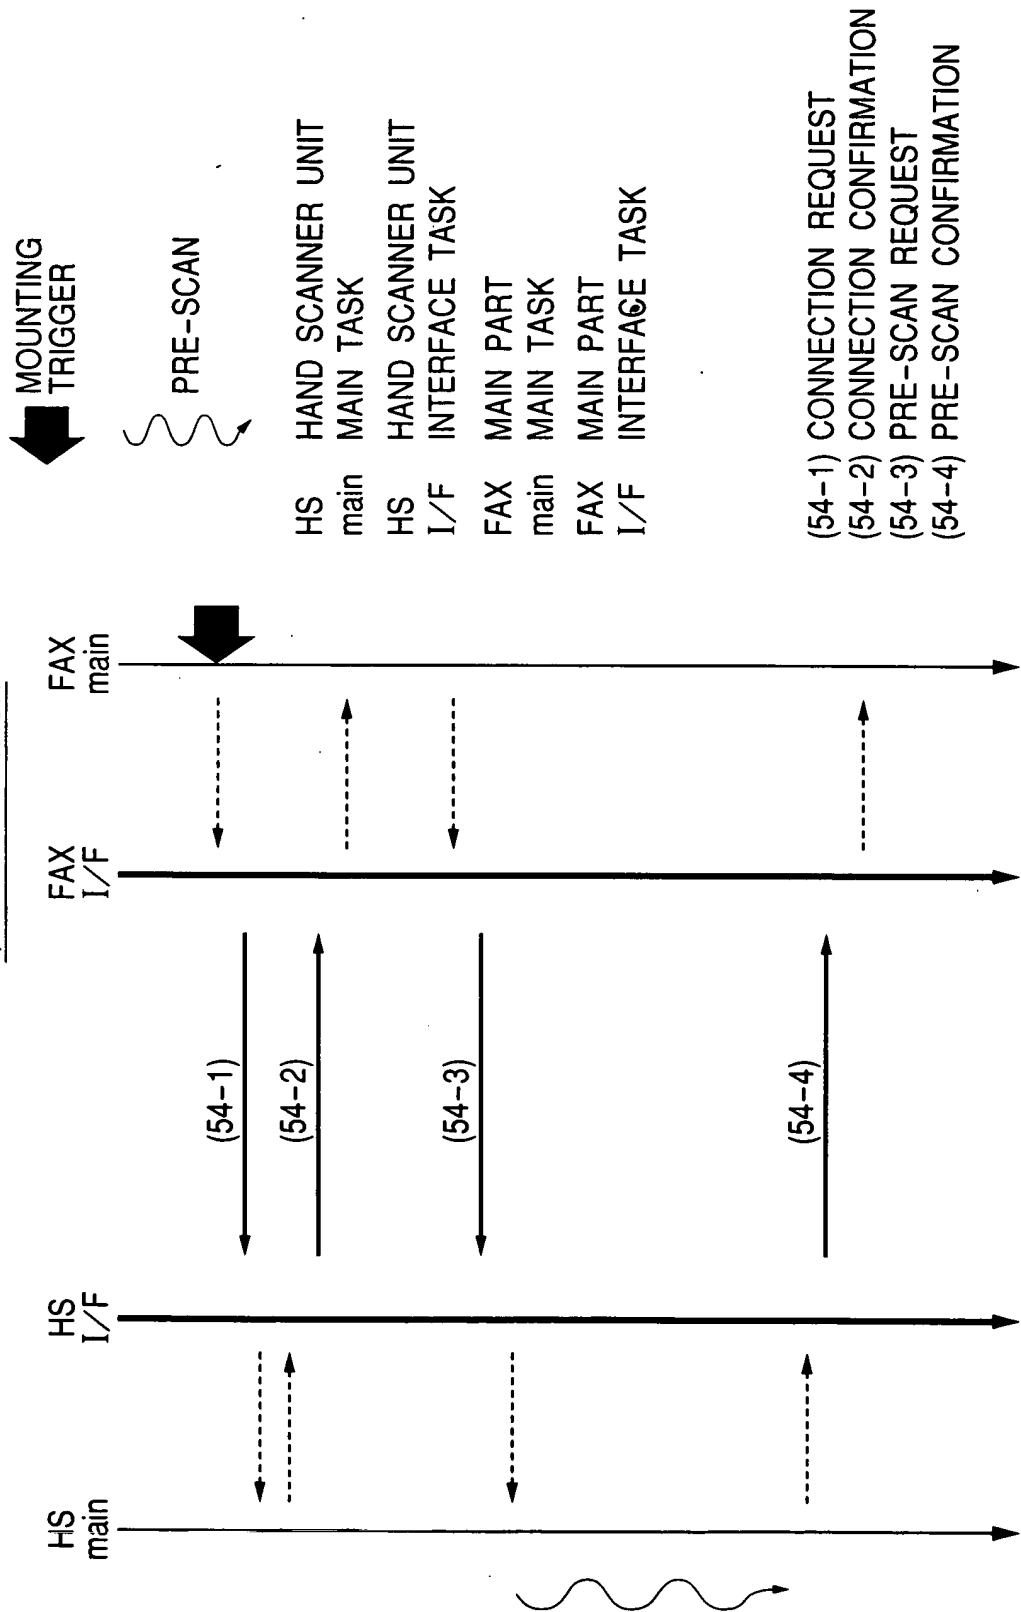
FIG. 54I/F INITIALIZATION

FIG. 55

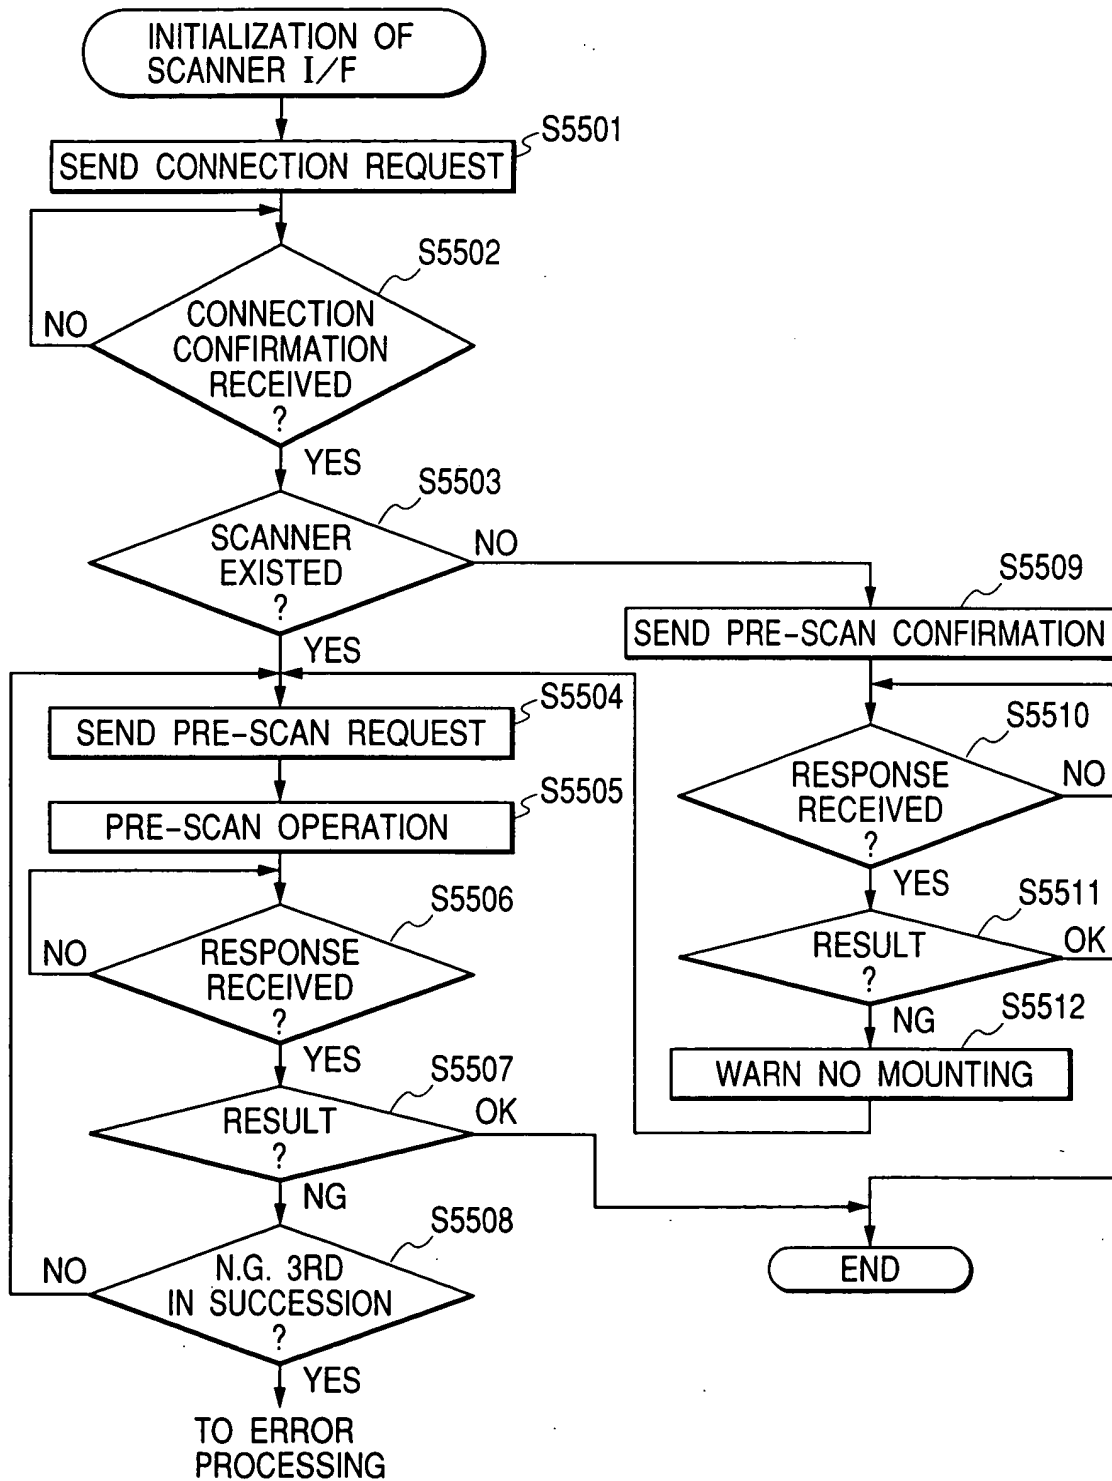


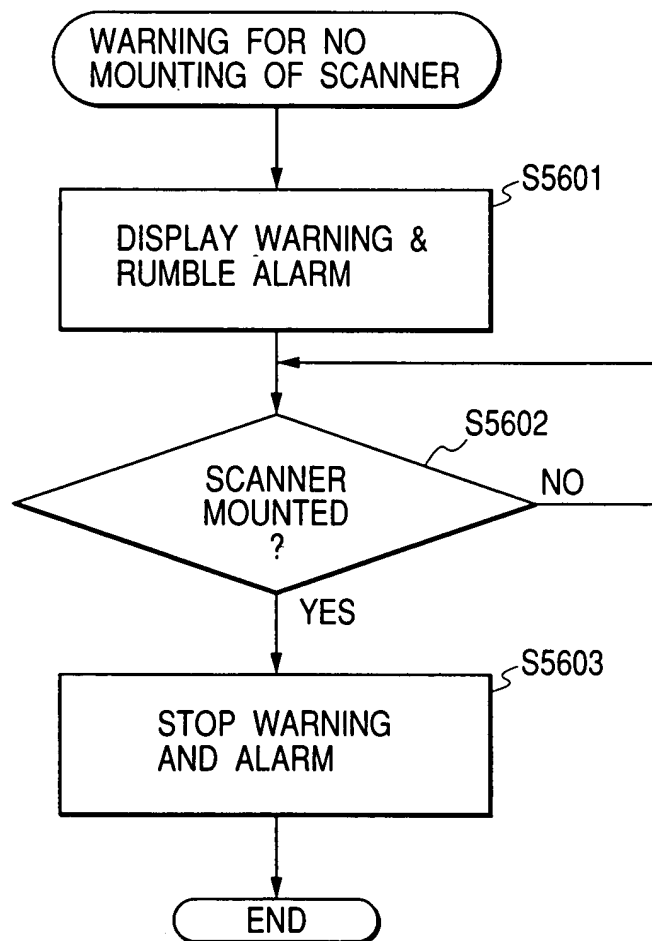
FIG. 56

FIG. 57
I/F IN READ OF SHEET

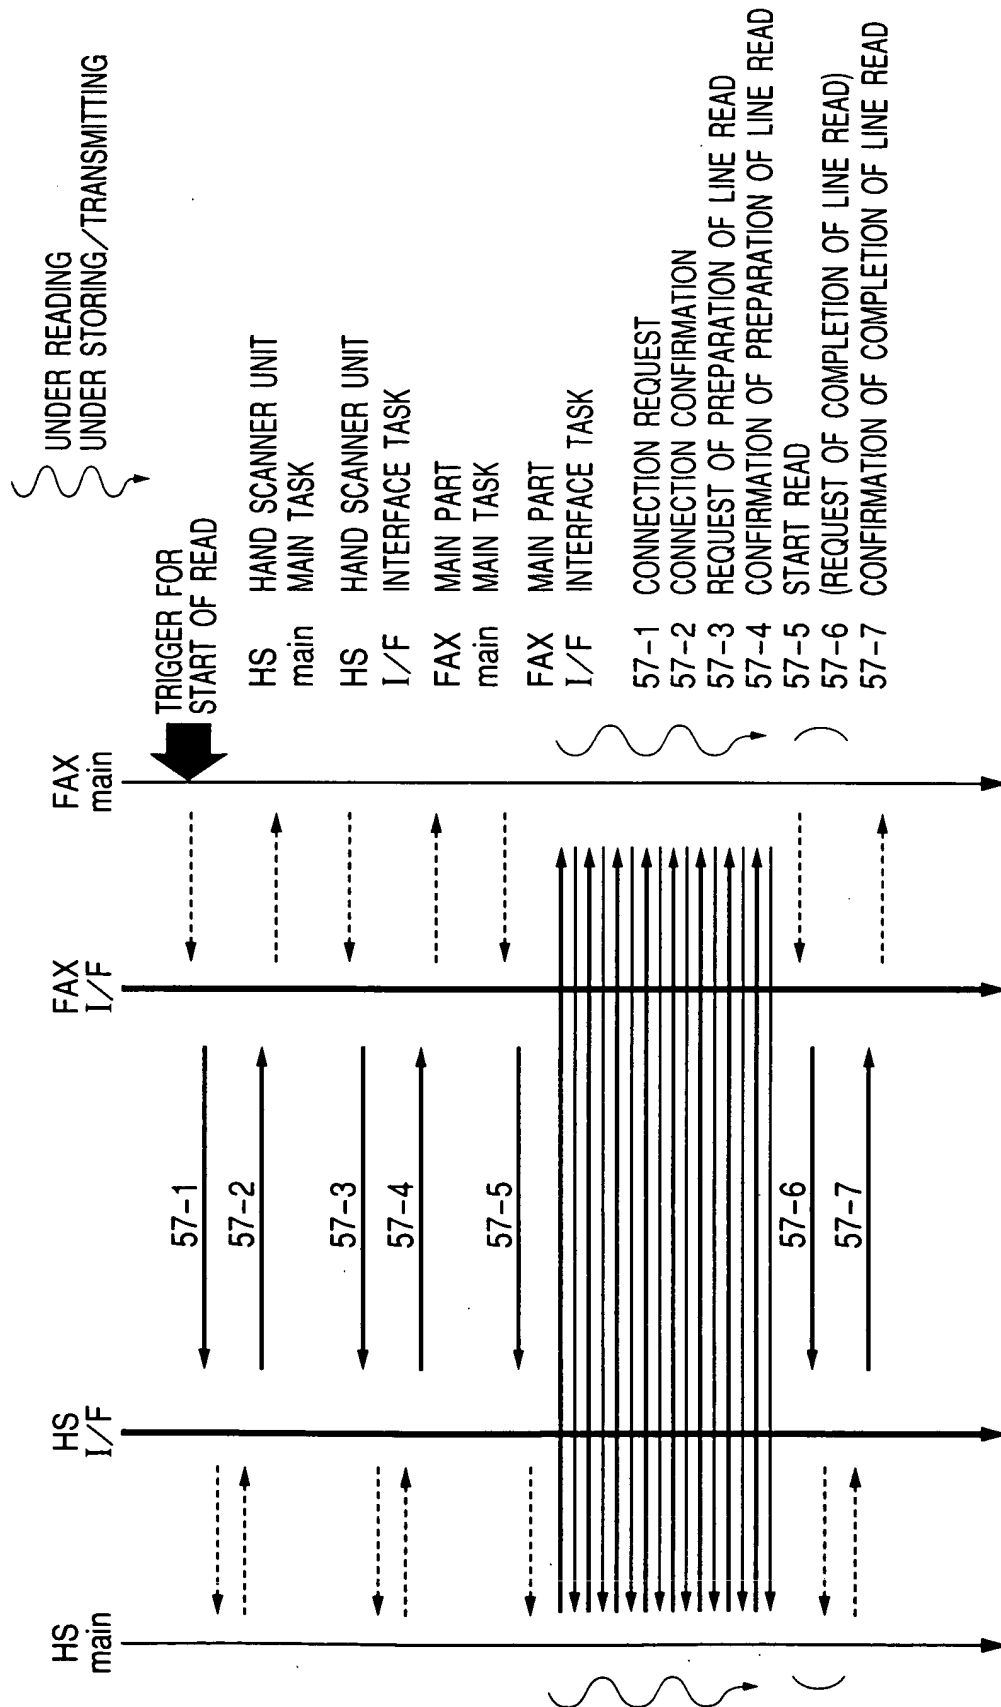


FIG. 58

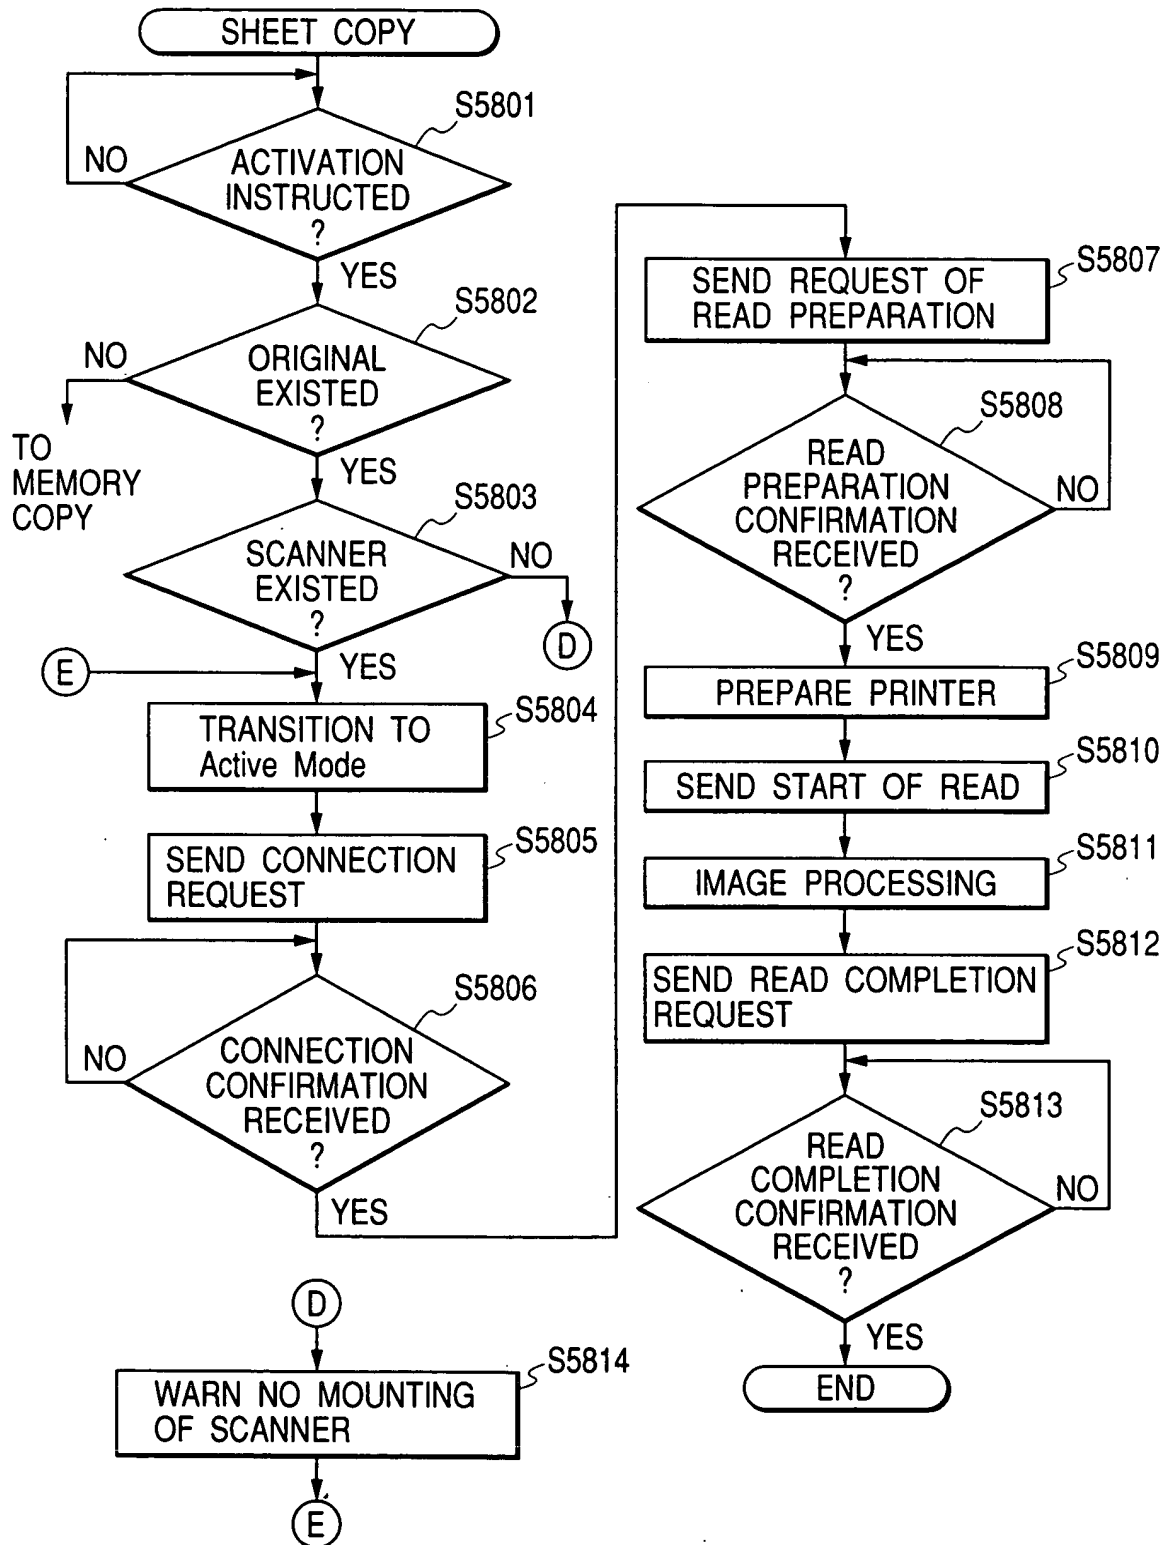


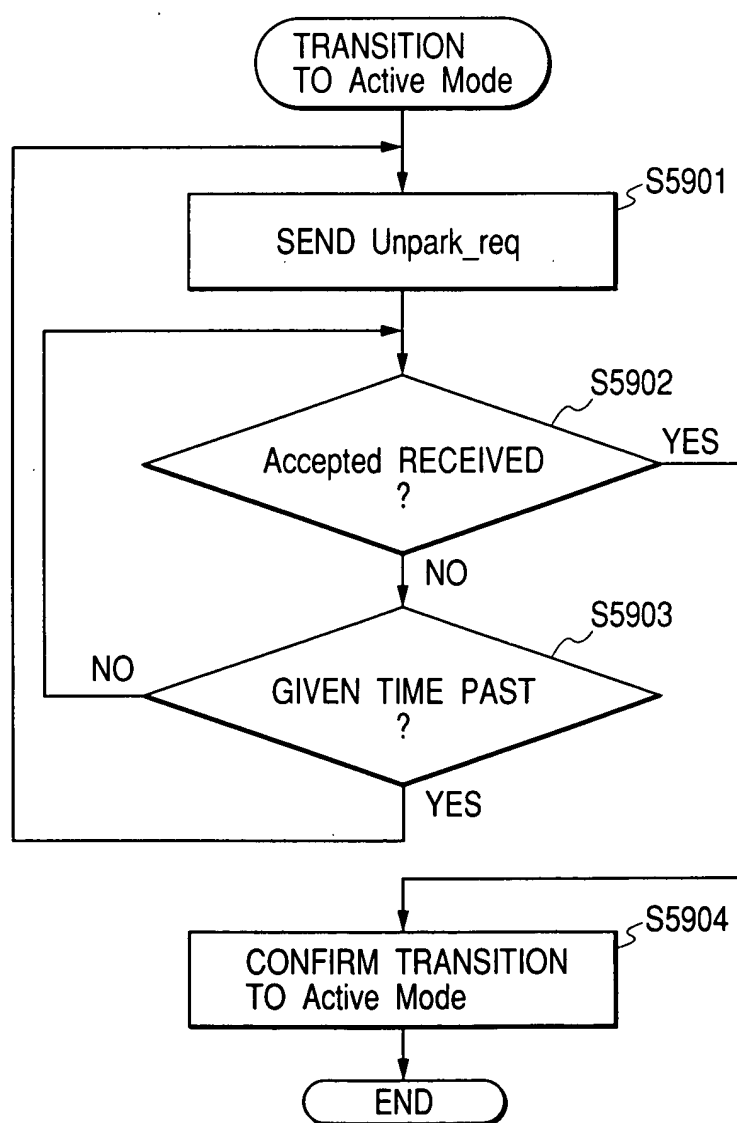
FIG. 59OPERATION FOR TRANSITION OF HAND SCANNER 430 TO Active Mode

FIG. 60

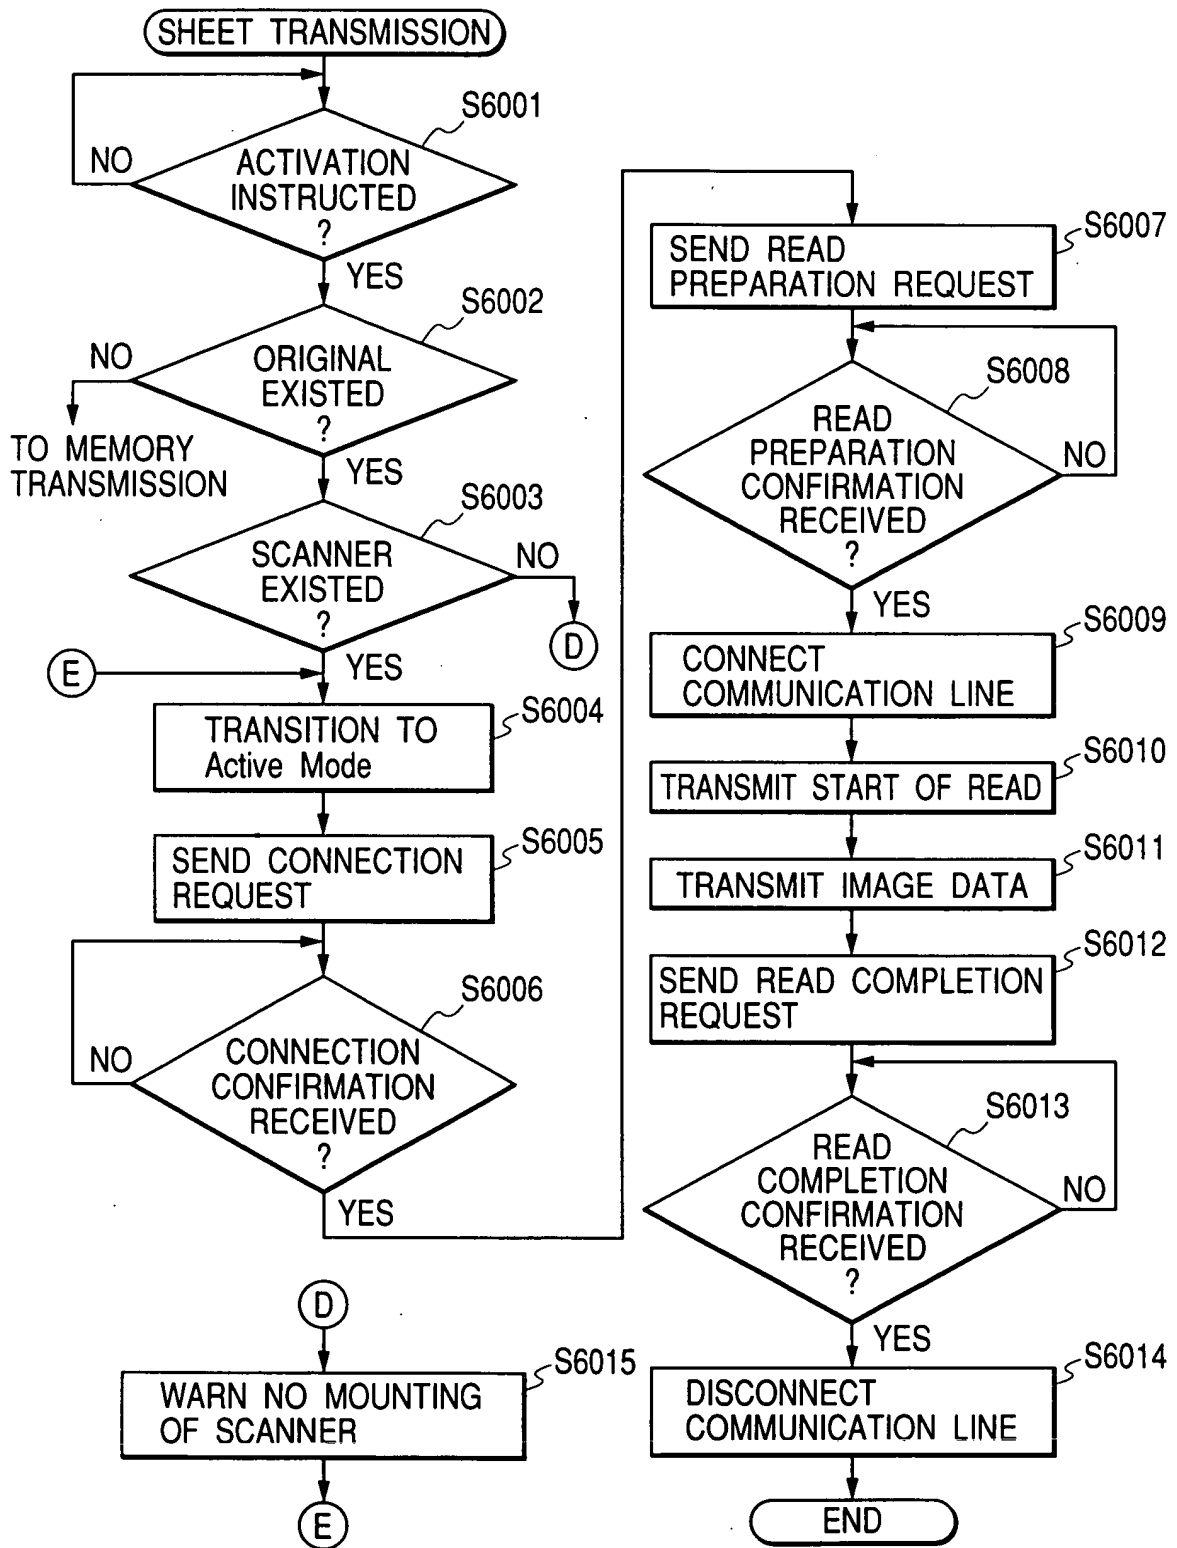


FIG. 61

I/F IN HAND SCANNER READING BY MAIN PART OPERATION

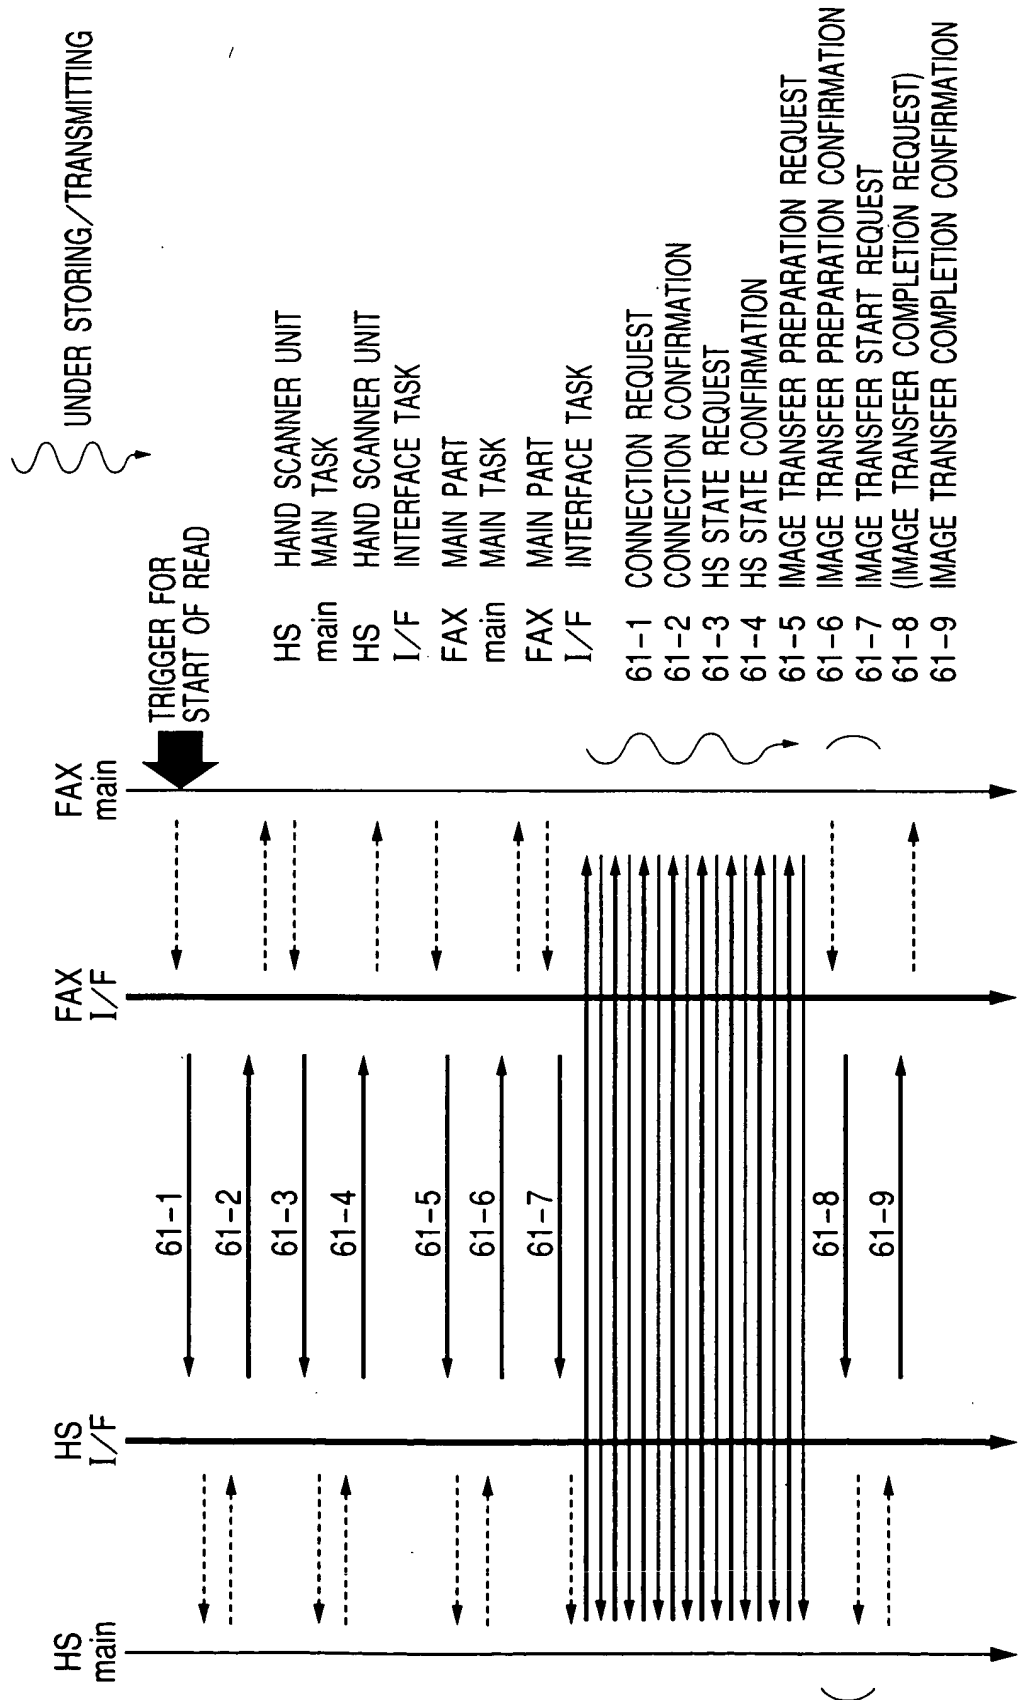


FIG. 62

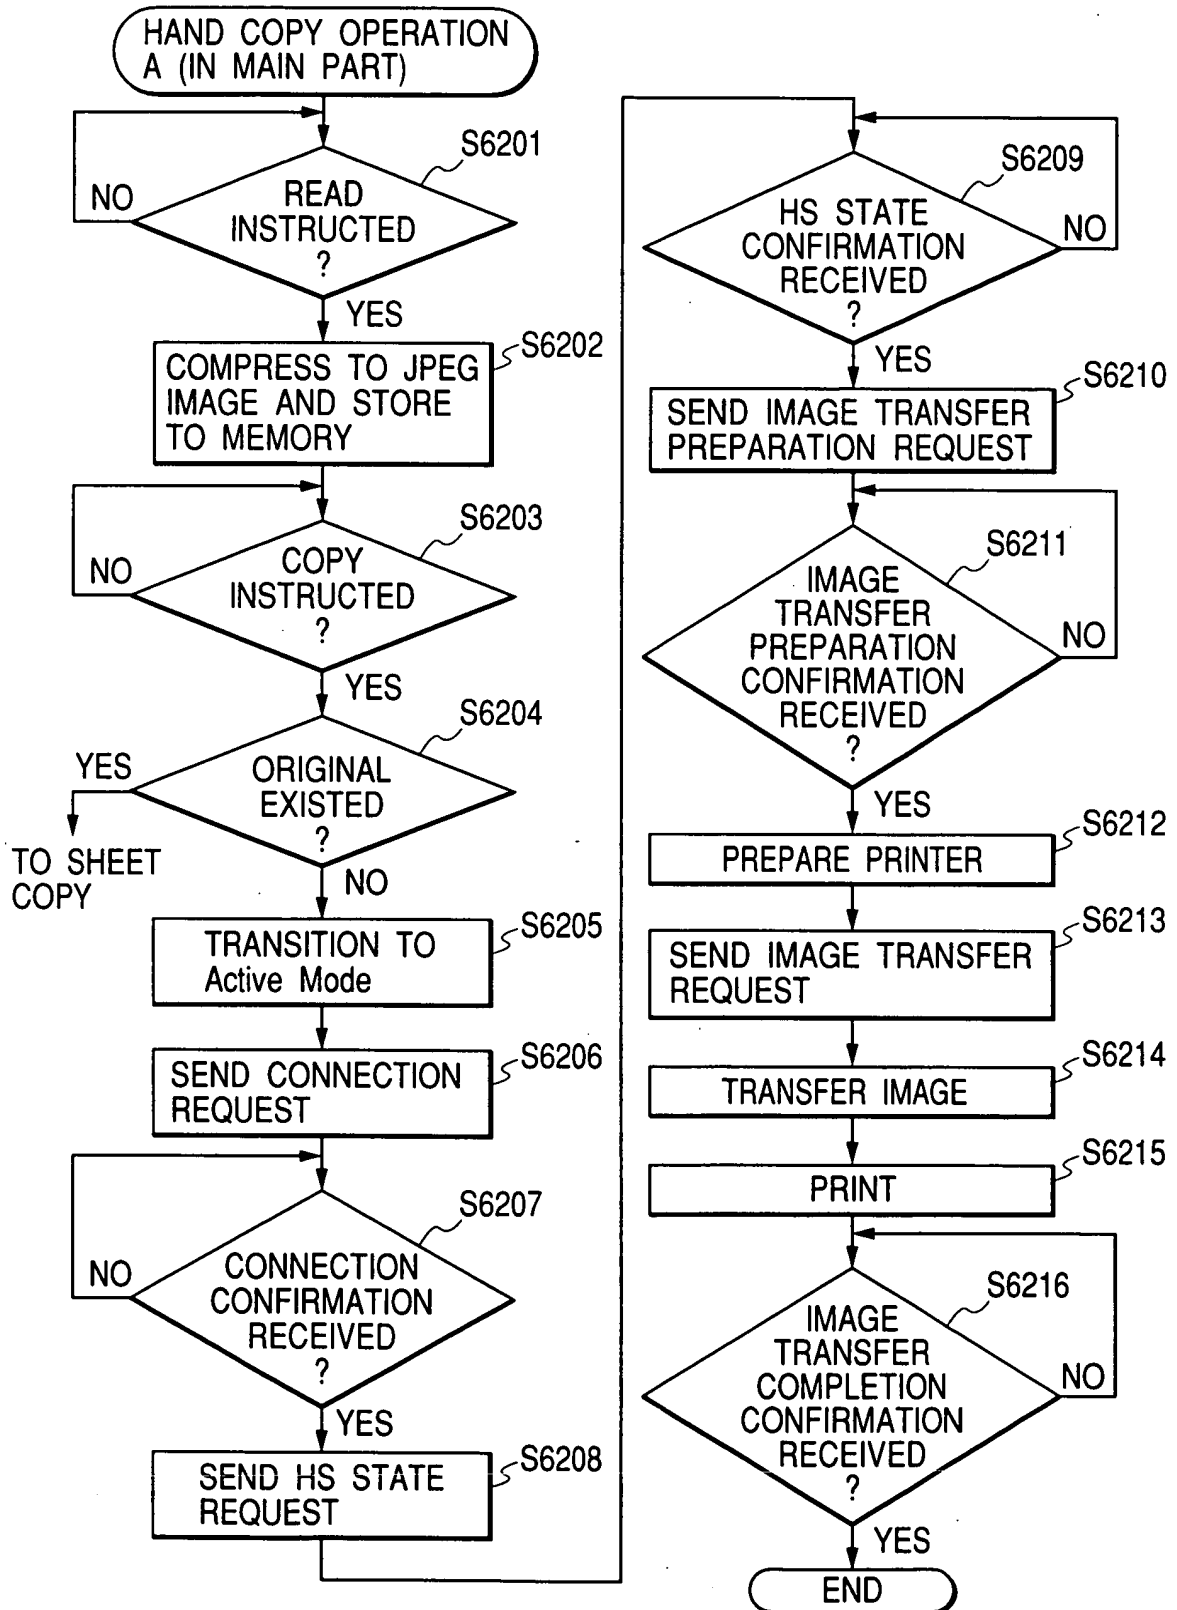


FIG. 63

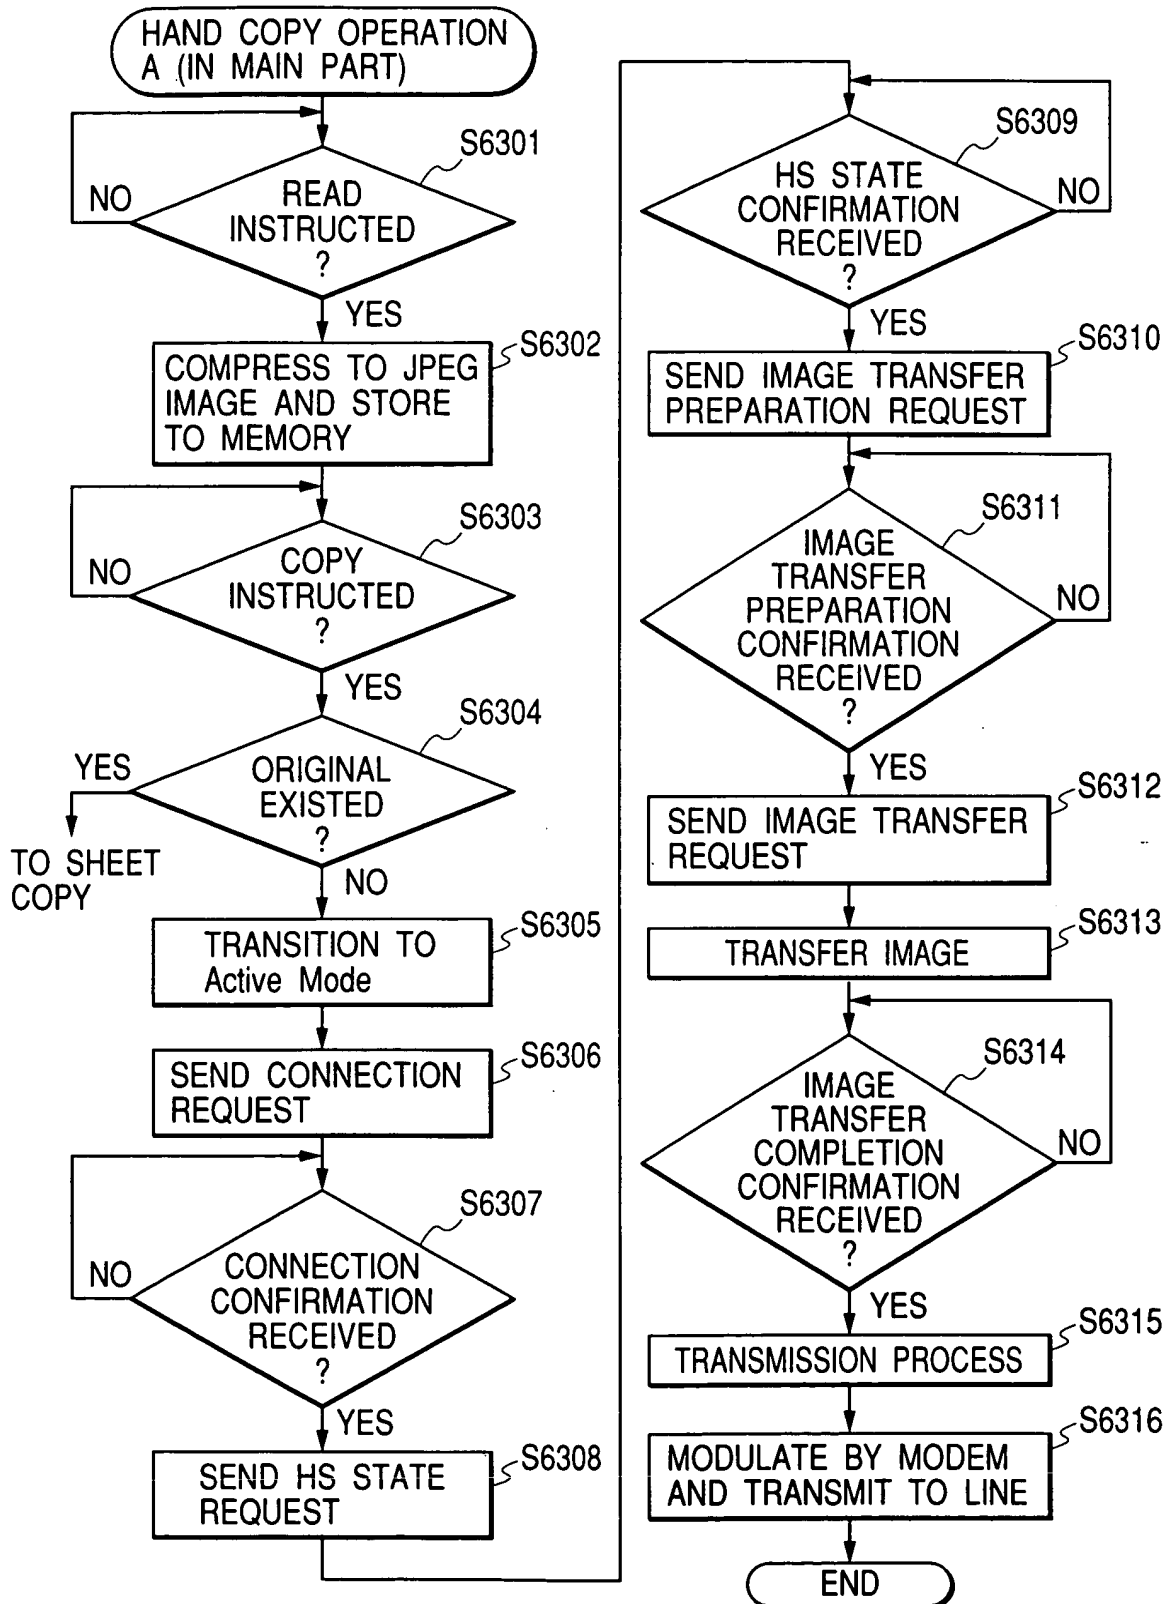


FIG. 64

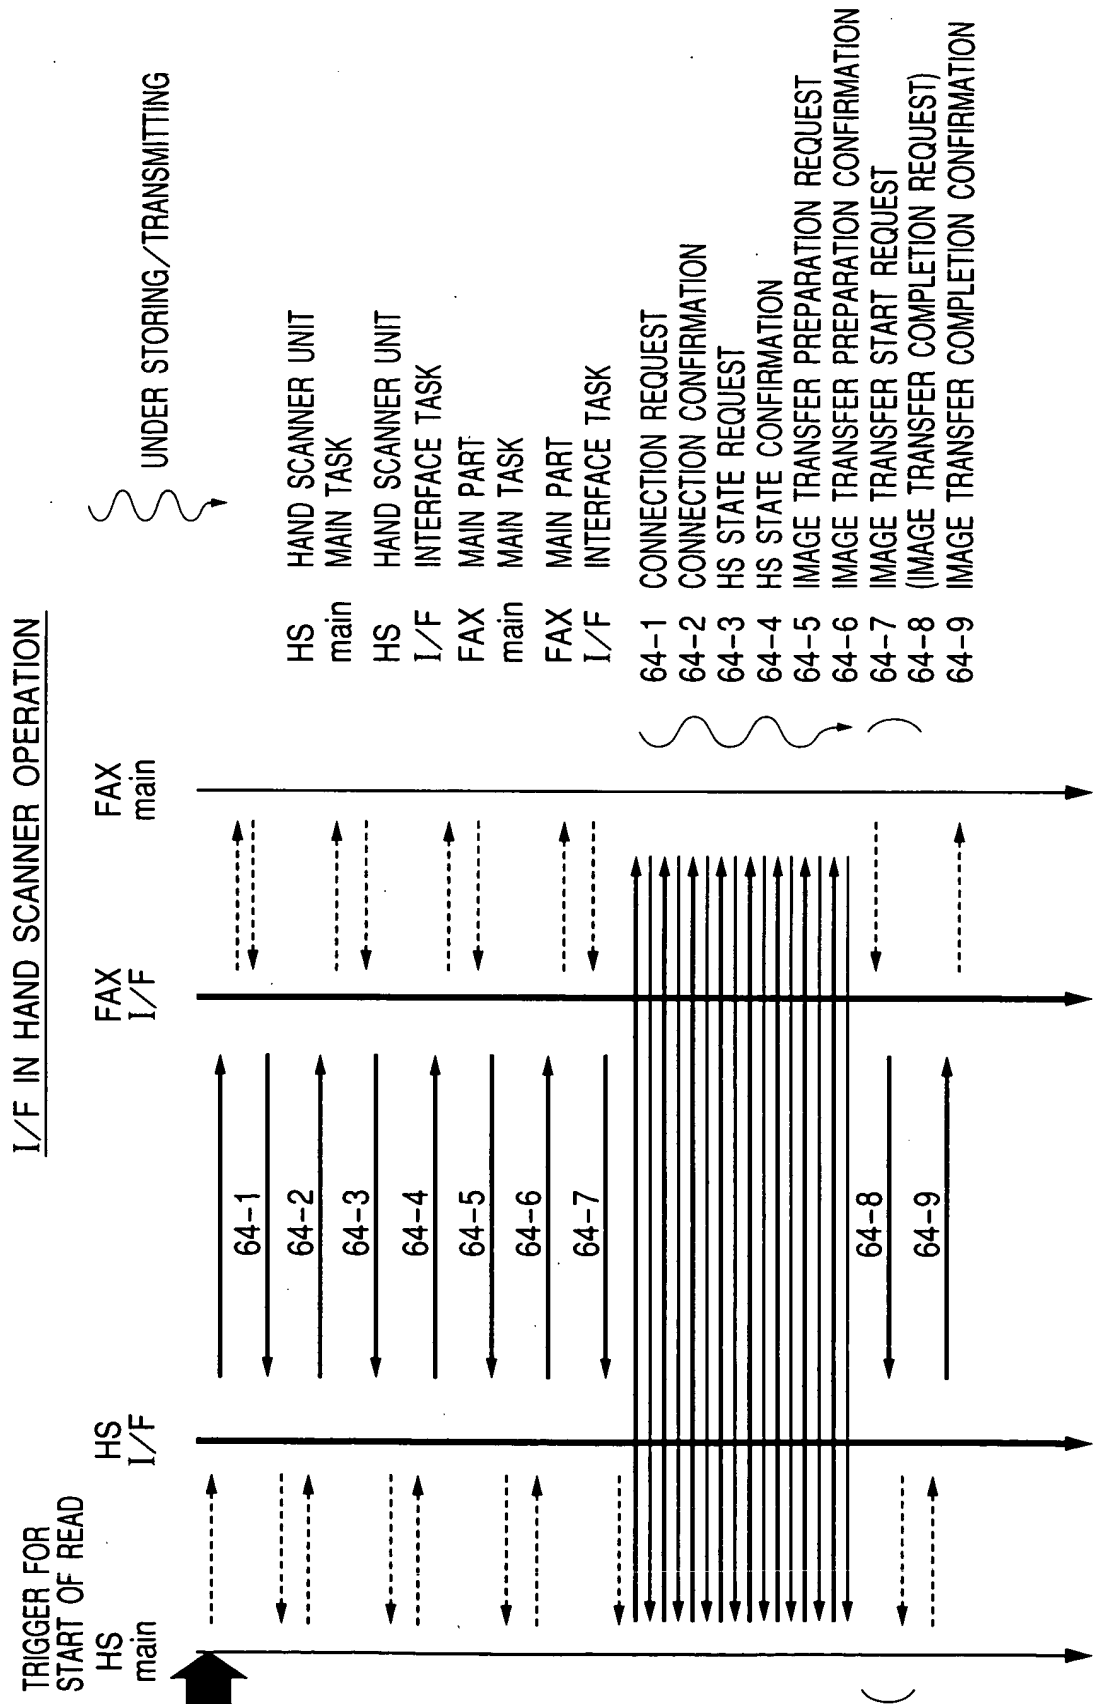


FIG. 65

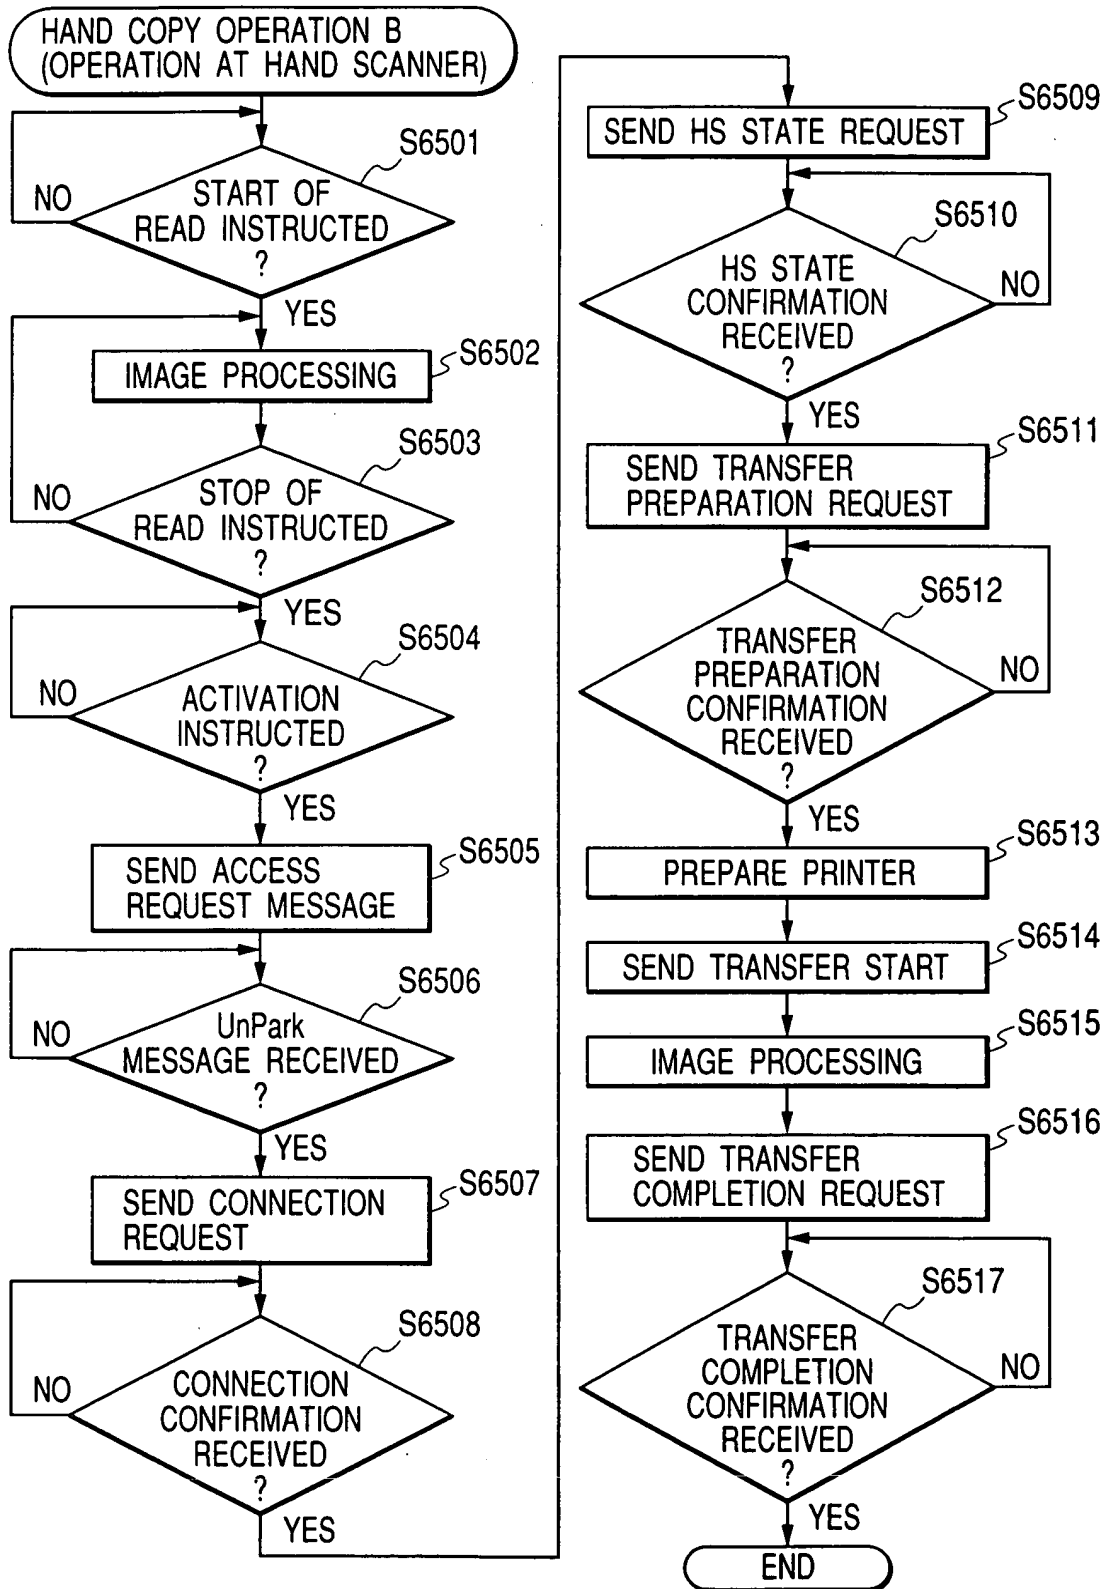


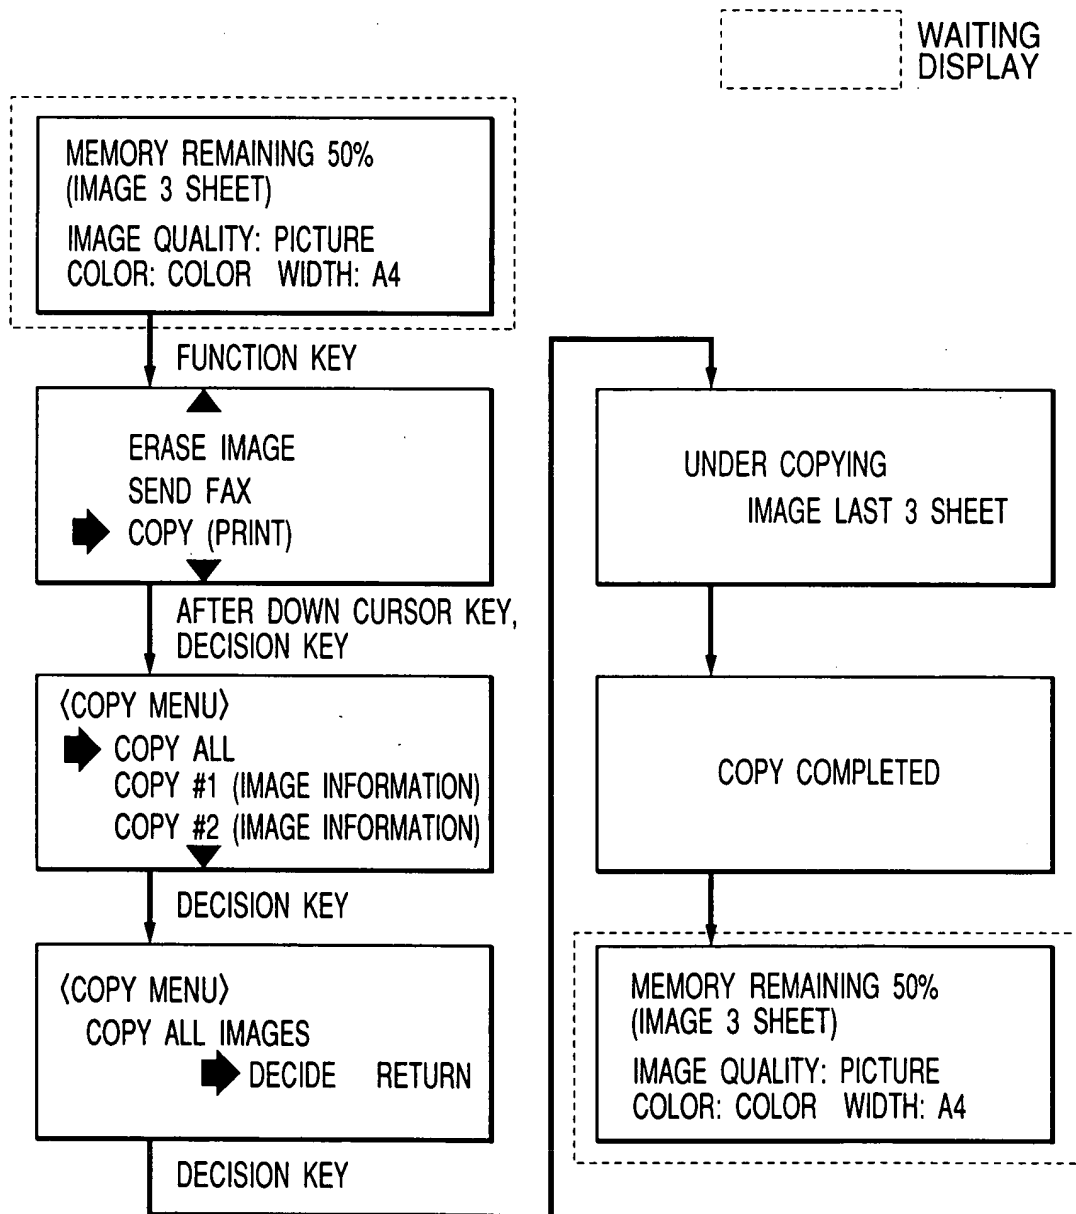
FIG. 66HAND COPY OPERATION

FIG. 67

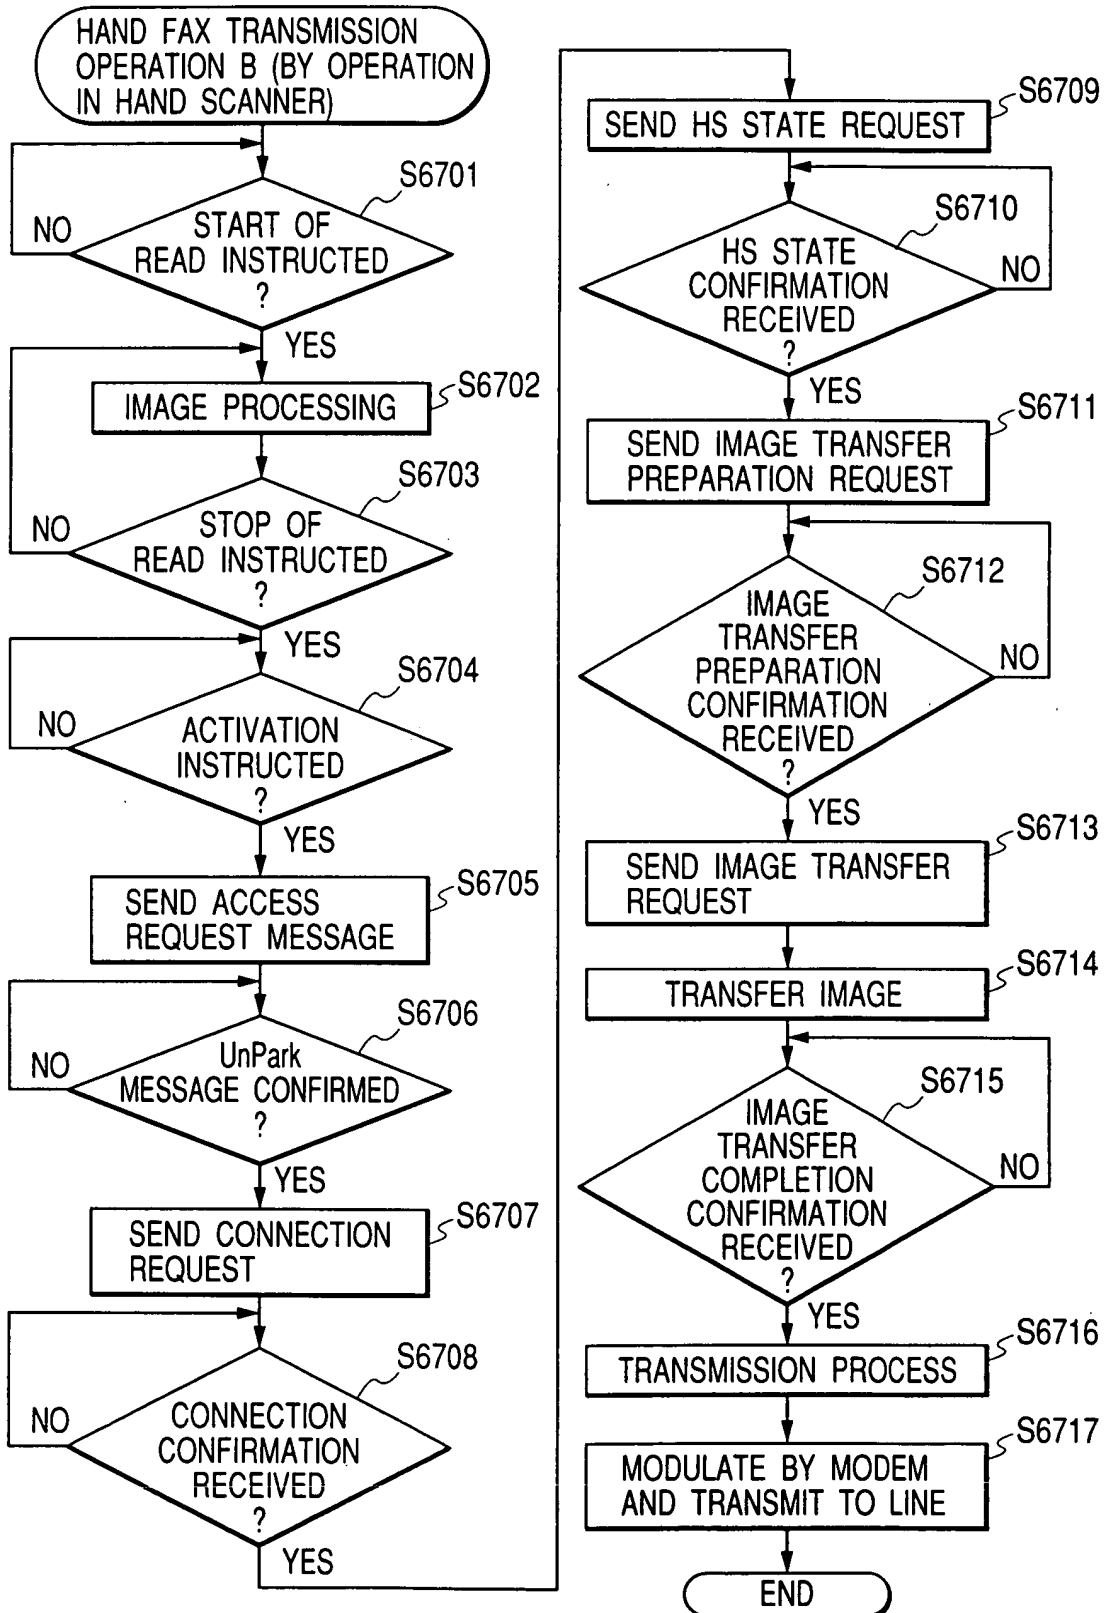


FIG. 68

HAND FAX TRANSMISSION OPERATION (1)

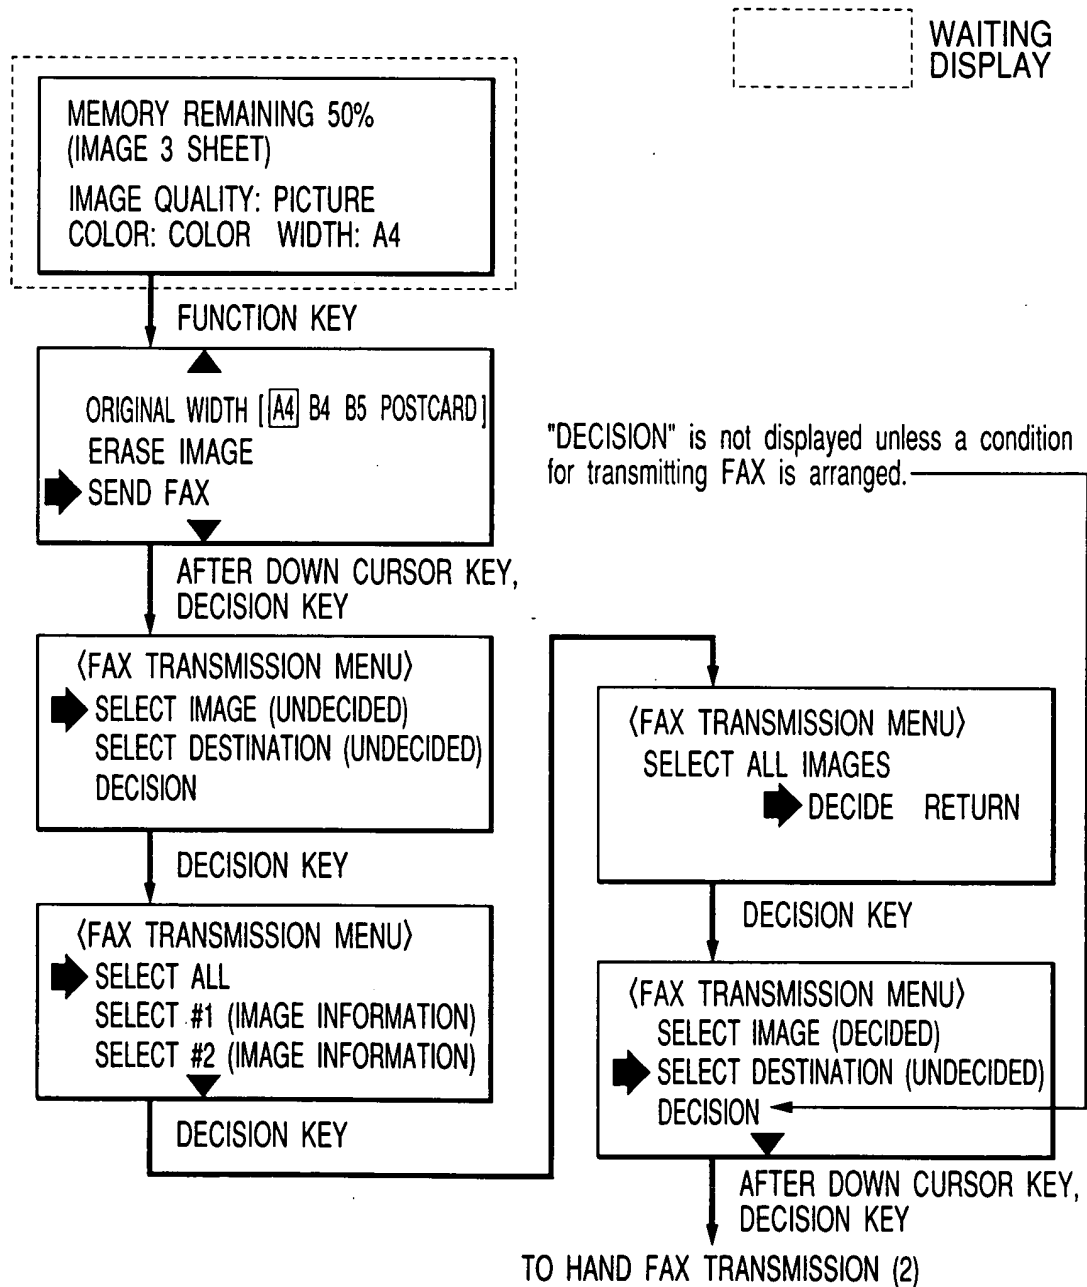
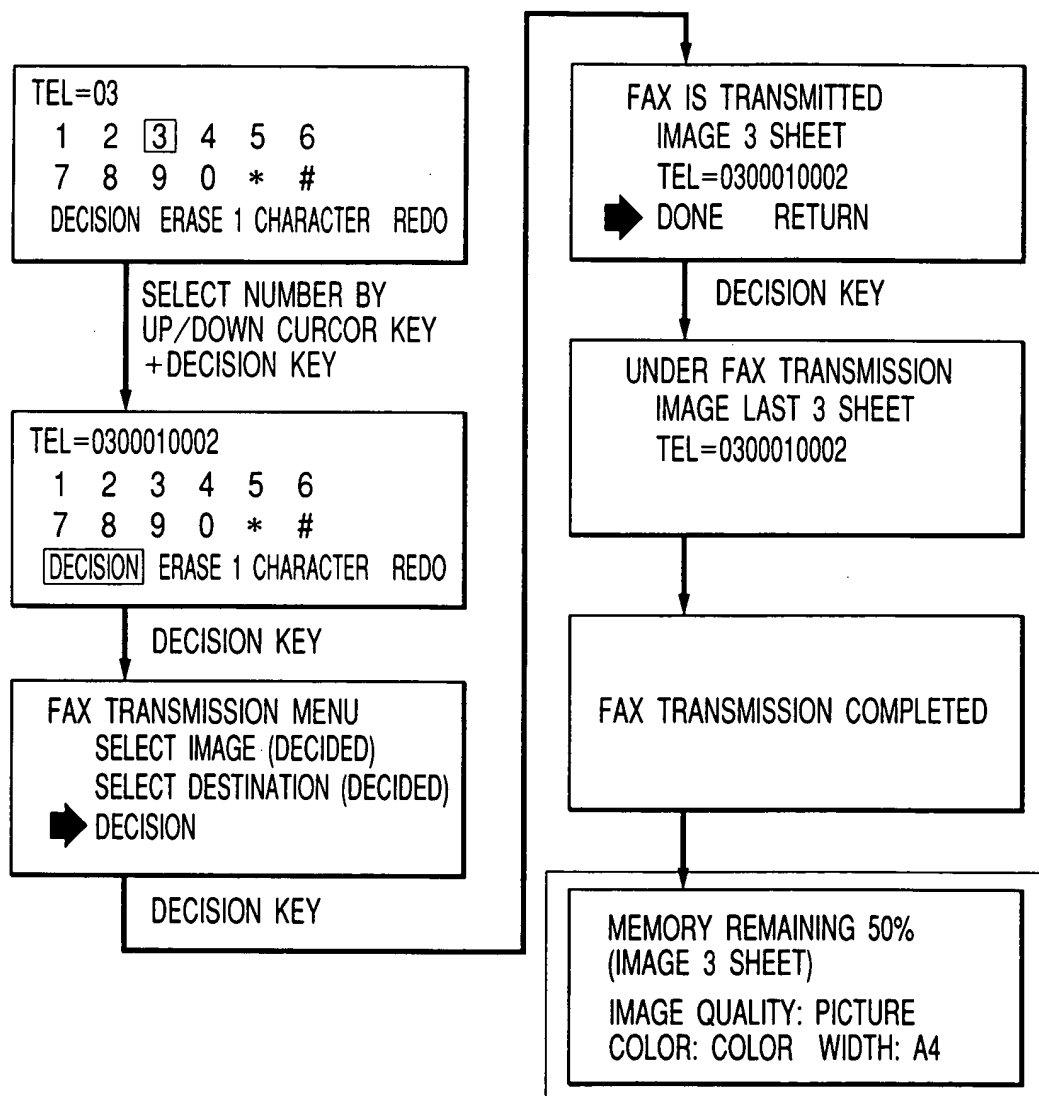


FIG. 69

HAND FAX TRANSMISSION OPERATION (2)



WAITING DISPLAY

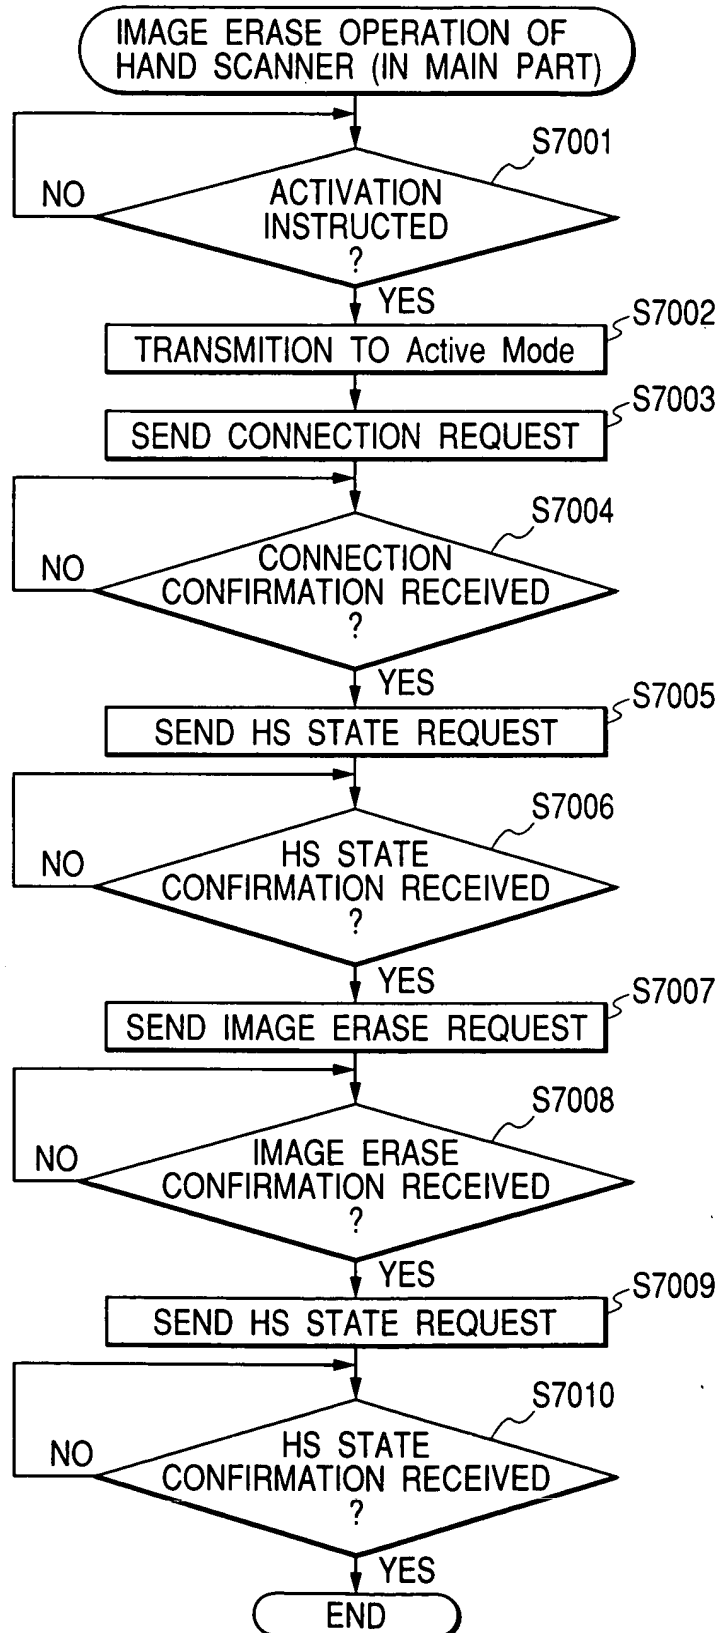
FIG. 70

FIG. 71

I/F FOR ERASING IMAGE IN HS (HAND SCANNER) FROM MAIN PART

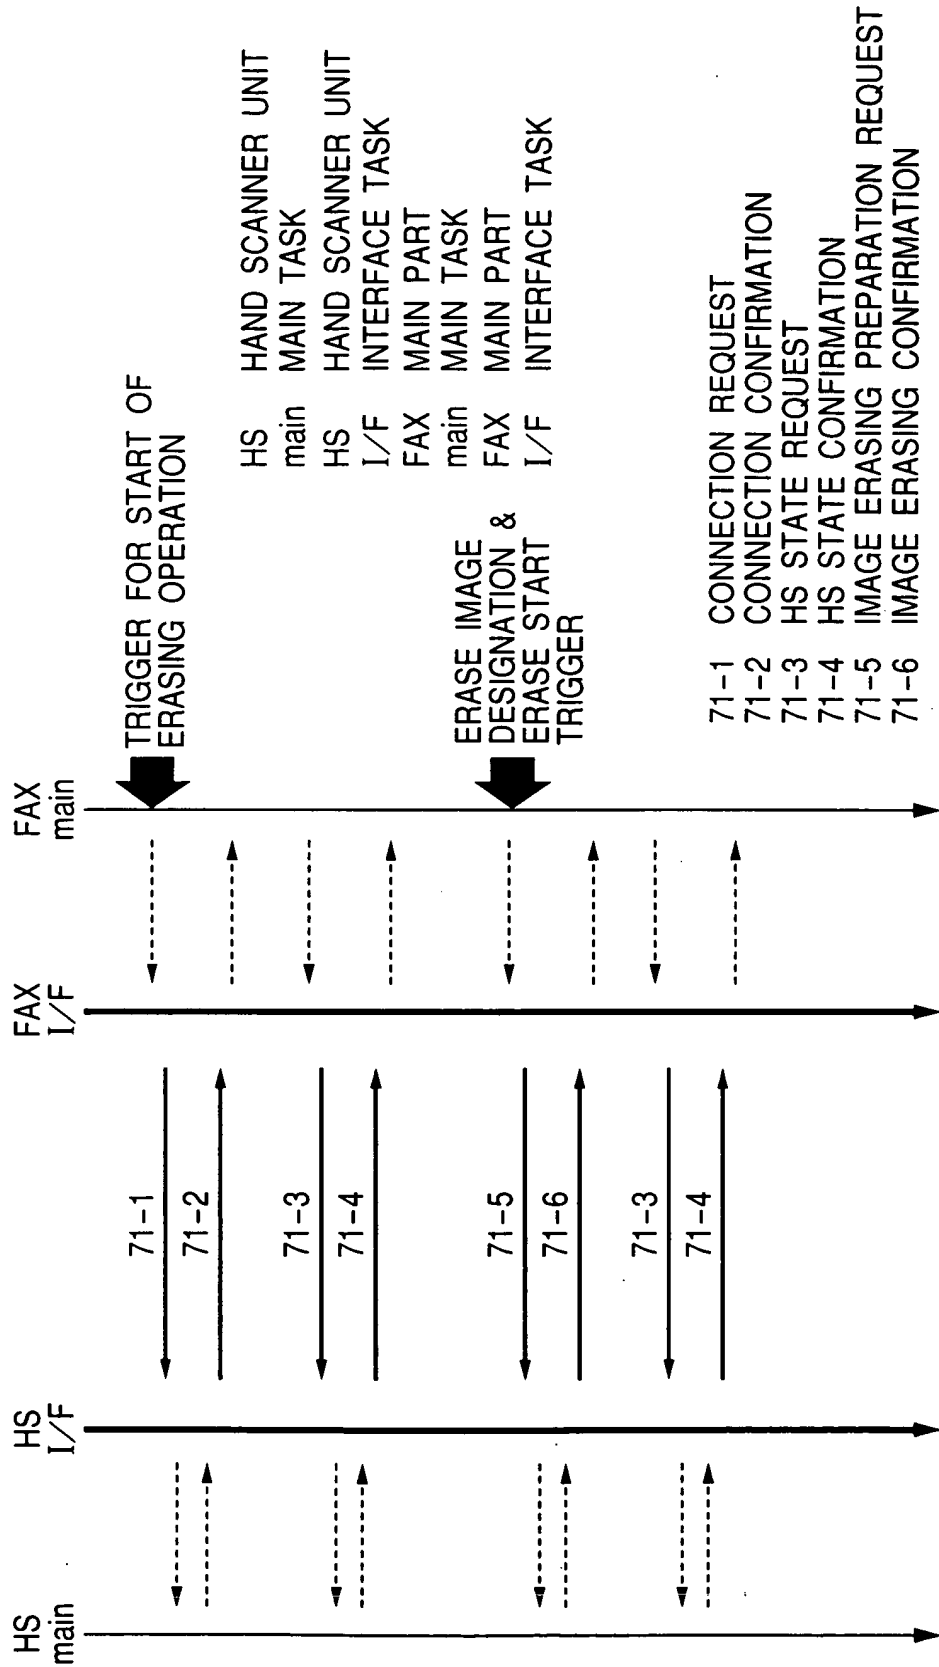


FIG. 72

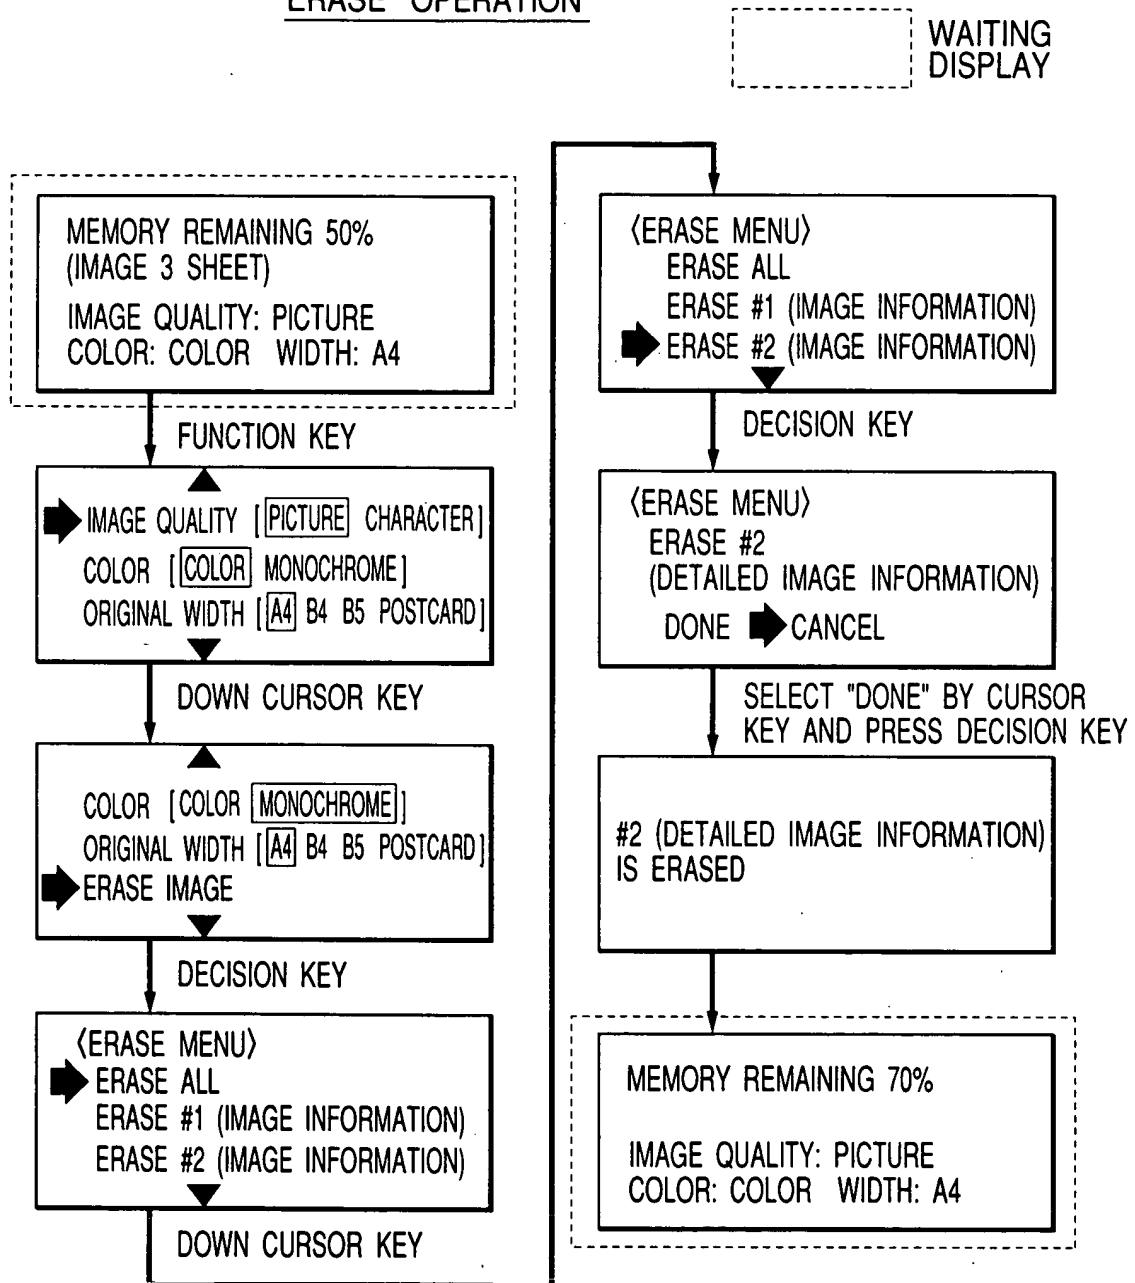
ERASE OPERATION

FIG. 73

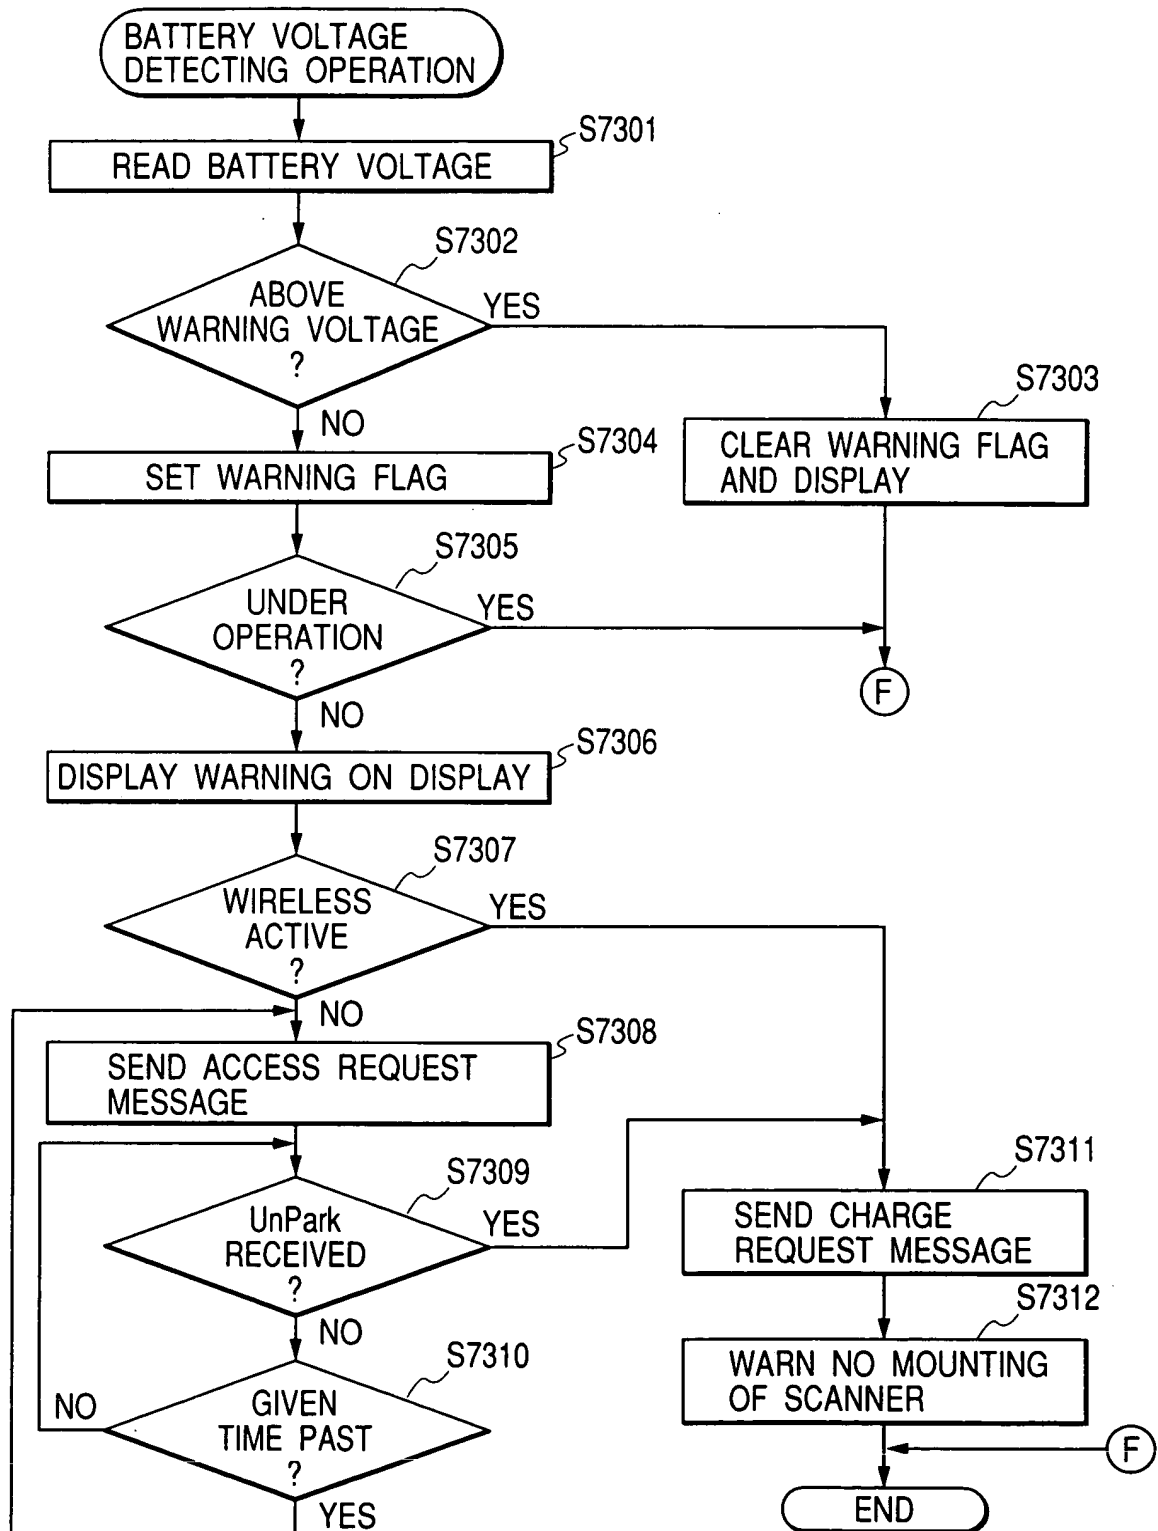


FIG. 74TRANSITION OPERATION TO Idle Mode